


## GNL-3017xx ( 3mm ROUND TYPE) Bi-color series

ABSOLUTE MAXIMUM RATING:(Ta=25 )

Parameter			Unit
DC Forward Current	30		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	150		mA
Operation Temperature	-40	+80	
Storage Temperature	-40	+100	
Solder Dip Temperature (5 seconds,1.6mm from body )	300	± 5	

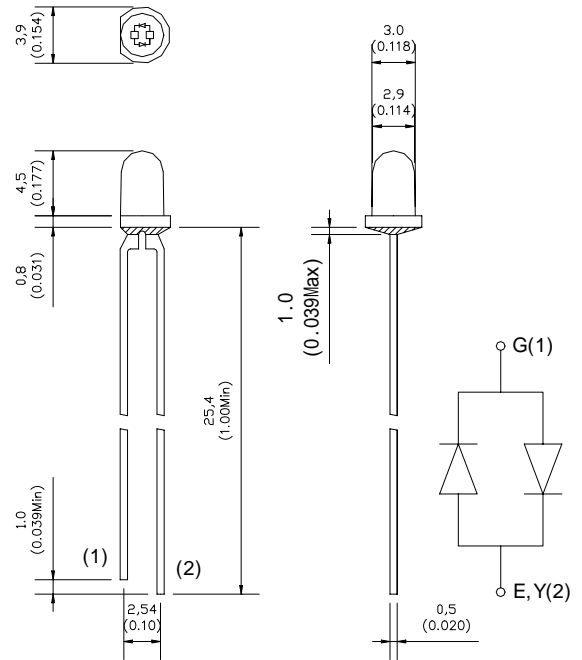

### Feature:

- 1.Small flange without stand-off
- 2.Long life-solid state reliability
- 3.Long lead length(25.4mm)
- 4.Versatile mounting on P.C. board or panel

### Description:

- 1.The shape of this series is round
- 2.General application is for indication,illumination,etc.
- 3.These LED lamps are available with a choice of defferent colors,light intensities,epoxy colors,etc.

Part Number	EMITTED COLOR		Lens Color	Peak Wave length (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2 1/2
						Min.	Typ.	
GNL-3017EGW	GaAsp/Gap	Hi-Eff Red	White Diffused	635	2.0	5.0	12	60 °
	Gap	Green		565	2.1	3.0	8.0	
GNL-3017YGW	Gap	Green	White Diffused	565	2.1	3.0	8.0	60 °
	GaAsp	Yellow		585	2.1	3.0	8.0	
GNL-3017UEUGW	AlGaInP	Super Red	White Diffused	625	2.0	100	200	60 °
	AlGaInP	Super Green		572	2.0	80	180	
GNL-3017EGC	GaAsp/Gap	Hi-Eff Red	Water Clear	635	2.0	15	30	30 °
	Gap	Green		565	2.1	12	20	
GNL-3017YGC	Gap	Green	Water Clear	565	2.1	12	20	30 °
	GaAsp	Yellow		585	2.1	12	20	
GNL-3017UEUGC	AlGaInP	Super Red	Water Clear	625	2.0	250	550	30 °
	AlGaInP	Super Green		572	2.0	220	480	