
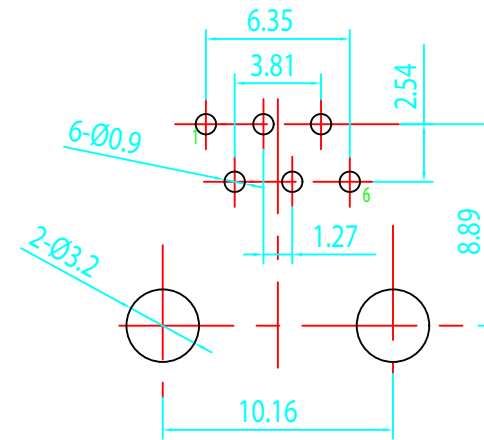
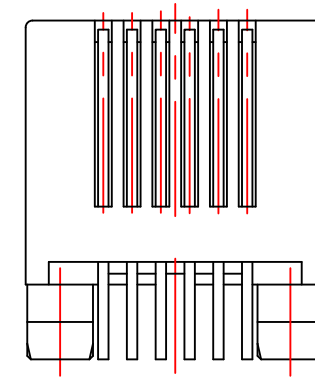
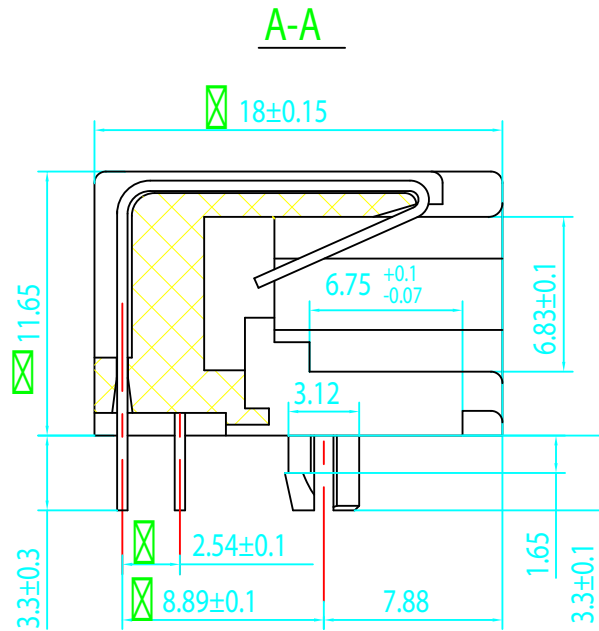


YH-53-02

REV.	ECN NO.	DATE

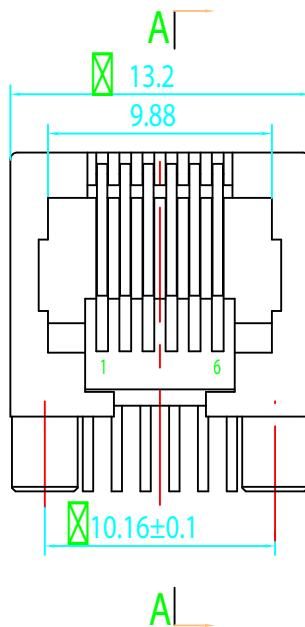

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - MECHANICAL:
 - HOUSING: PBT, UL94V-0, BLACK;
 - TERMINALS: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au;
 - DURABILITY: 750 CYCLES Min.
- 3"" Critical Dimension.

RoHS Compliant

CZT 意通接插件有限公司
YIHUA COMMUNICATED CONNECTOR CO.,LTD.

TOLERANCES

0~15: ±0.15
15~30: ±0.20
30~ : ±0.25
ANGLES: ±1°

MATERIAL: SEE NOTE

Designed:

NAME: 5321 6P6C

FINISH: SEE NOTE

Checked:

DWG NO.: Q08010701

REV

SHEET 1 OF 1

Approved:

PART NO.: B531N-6603-M002

00

FIRST ANGLE PROJECTION	A4	SCALE	UNIT	CUSTOMER:
	SIZE	3:1	mm	MODEL NO.: