


# Ceramic Filters for FM Receiver

**(LT10.7M) Ceramic Filters  
are Compatible Murata SFELF10M7**

## ▶ Preview

Token LT10.7M series are monolithic devices which utilize the energy-trapped thickness vibration-mode. This principle of operation is based upon the fact that an excellent resonating element with low spurious vibration can be obtained by adhering to certain theoretical parameters of design. These parameters include the physical dimensions of the peizo element, the electrode pattern, and the associated mass loading effect of the electrodes.

Token categorizes the LT 10.7 family according to rank of center frequency. This ranking indicates that a given LT 10.7 will be marked with one of the colors listed in the following chart and will exhibit the center frequency in Technical Characteristics Table.

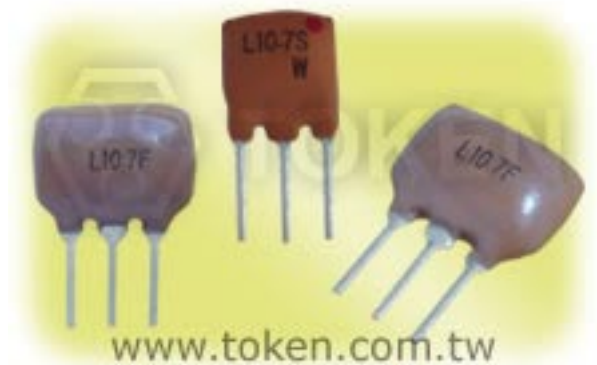

The LT10.7M offers three series: LT10.7M for FM Receiver (Compatible Murata SFELF10M7), LT10.7M A10 Insertion Loss  $2.5 \pm 2.0$  db  $\sim 4.5 \pm 2.0$  db (Compatible Murata SFELF10M7 A10), and LT10.7M Wide Band-width 950 kHz at 20dB/Narrow Band-width 95 kHz at 20dB (Compatible Murata SFELF10M7 DBS Receiver).


LT10.7M Narrow Band-width series features stable low spurious and temperature characteristics. This series is suitable for European car-audio or AM up conversion use that needs narrow band characteristics are stable. LT10.7M Wide Band-width series are specified to make up conventional ceramic filters which wider band characteristics not obtained.

Custom parts are available on request. Token will also produce devices outside these specifications to meet specific customer requirements, please contact our sales for more information.

## ▶ Applications

- Change in center frequency is typically within  $\pm 30$ ppm/ $^{\circ}$ C at  $-20^{\circ}$ C to  $+80^{\circ}$ C.
- Various band widths are available for applications in wide to narrow bands.
- Low loss, favorable waveform symmetry, and high selectivity.
- These miniature filters have high mechanical strength.
- Excellent shape factor of frequency response.
- Small dispersion and stable characteristics.
- Good waveform symmetry.
- High reliability.

## ▶ Dimensions

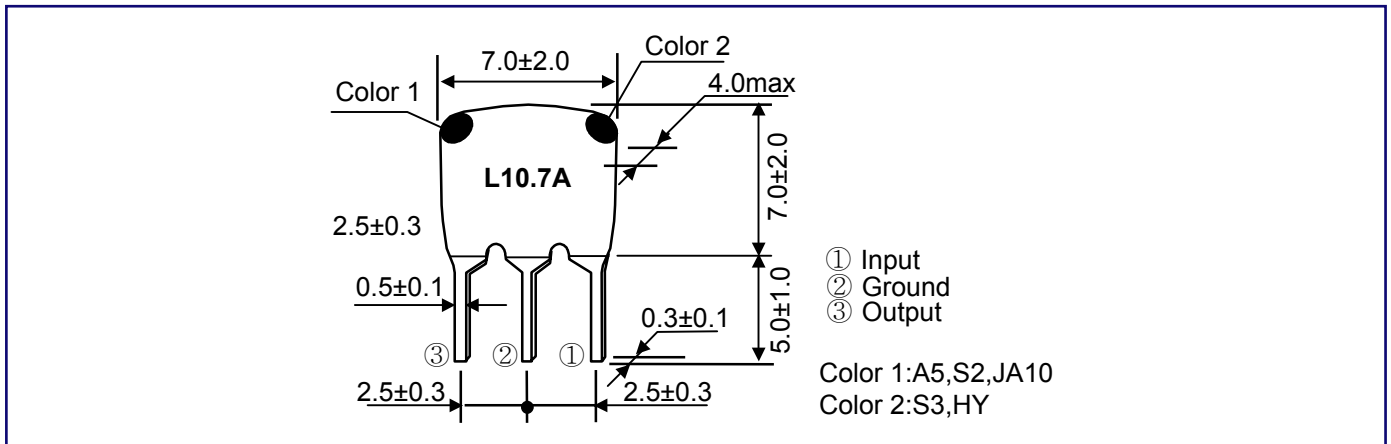

## ▶ FM Receiver (Murata SFE10M7 FM-IF Compatible) Technical Characteristics

Part Number	3dB Band Width (kHz)	20dB Band Width (kHz) max	Insertion Loss (dB) max	Spurious Attenuation (9-12MHz)(dB)min
LT10.7MA5	$280 \pm 50$	650	6	30
LT10.7MS2	$230 \pm 50$	600	6	40
LT10.7MS3	$180 \pm 40$	520	7	40

Note: Input/Output Impedance:  $330\Omega$

## ▶ Low - Loss Type (Murata SFE10M7 A10 Compatible) Technical Characteristics

PartNumber	3dB Band Width(kHz)	20dB Band Width(kHz) max	Insertion Loss(dB)	Spurious Attenuation (9-12MHz)(dB)min
LT10.7MA5A10	$280 \pm 50$	590	$2.5 \pm 2.0$	30
LT10.7MS2A10	$230 \pm 50$	520	$3.0 \pm 2.0$	35
LT10.7MS3A10	$180 \pm 40$	470	$3.5 \pm 1.5$	35
LT10.7MJA10	$150 \pm 40$	360	$4.5 \pm 2.0$	35


Note: Input/Output Impedance:  $330\Omega$

## ▶ Wide/Narrow Band-width (Murata SFE10M7 DBS Receiver Compatible) Technical Characteristics


Part Number	3dB Band Width (kHz)	20dB Band Width (kHz) max	Insertion Loss (dB)	Spurious Attenuation (9-12MHz)(dB)min
LT10.7MA19	350min	950	$3.0 \pm 2.0$	20
LT10.7MA20	$330 \pm 50$	680	$4.0 \pm 2.0$	30
LT10.7MHY	$110 \pm 30$	350	$7.0 \pm 2.0$	30
LT10.7MFP	20min	95	6.0max	24(10.7 $\pm$ 1.0MHz)

Note: Input/Output Impedance:  $470\Omega$ (MA19),  $330\Omega$ (MA20, MHY),  $600\Omega$ (MFP)

## Characteristics

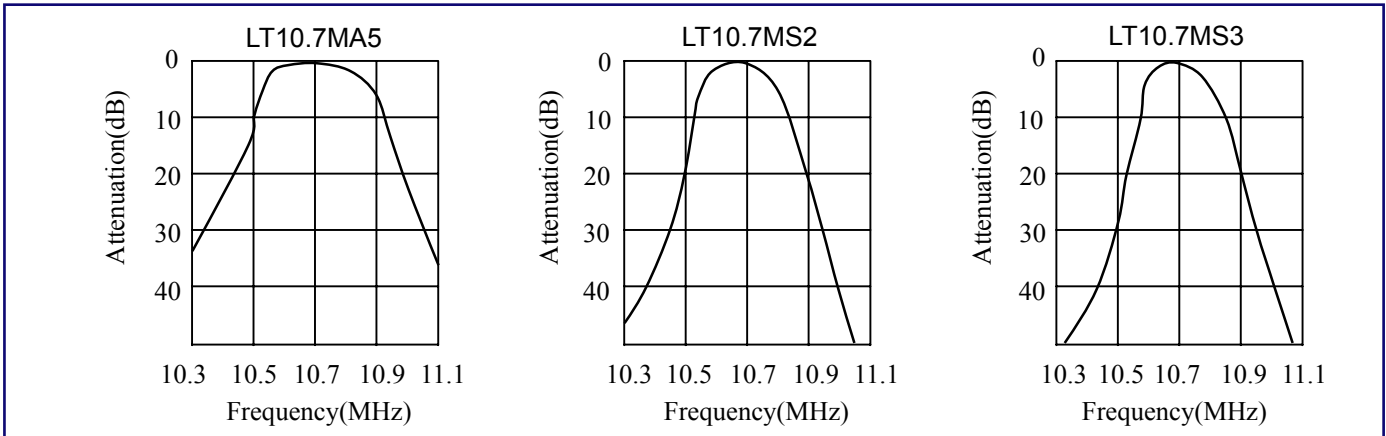

## Test Circuit

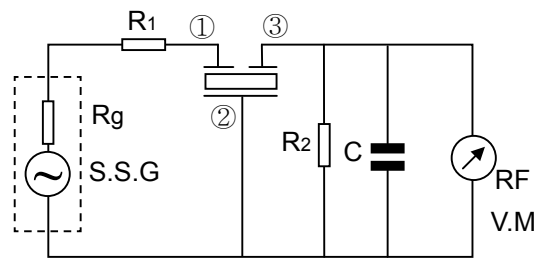

$$R_g + R_1 = R_2 = 330 \Omega \quad C = 10\text{pF}$$


Including stray capacitance and input capacitance of RF voltmeter

1. When using ceramic filters, it is most important to match the input/output load to impedance 330 ohm (LT10.7MA19 is 470 ohm matching). Waveform symmetry is damaged when reactance is added to the input/output load.
2. Two ceramic filters directly connected can be used for high selectivity. For reducing waveform variation, it is recommended to input a buffer AMP between ceramic filters.
3. The LT10.7M series are of input/output symmetric structure so that in theory there is no input/output directionality. Actual circuits may use different input/output loading conditions (for example, mismatched impedance) or capacitance load. In such cases, the waveform will be a little changed by the direction of the input/output of the ceramic filters.

## ▶ Standard Marking Color

Center Frequency	Color
D:10.64MHz±30kHz	Black
B:10.67MHz±30kHz	Blue
A:10.70MHz±30kHz	Red
C:10.73MHz±30kHz	Orange
E:10.76MHz±30kHz	White

## ▶ How to Order

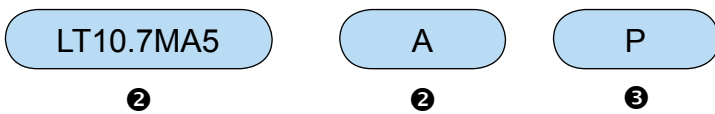

### ① Part Number

Part Number
LT10.7MA5
LT10.7MS2
LT10.7MS3
LT10.7MA5A10
LT10.7MS2A10
LT10.7MS3A10
LT10.7MJA10
LT10.7MA19
LT10.7MA20
LT10.7MHY
LT10.7MFP

### ② Center Frequency color code

Code	Center Frequency color code
A	10.70MHz±30kHz Red
B	10.67MHz±30kHz Blue
C	10.73MHz±30kHz Orange
D	10.64MHz±30kHz Black
E	10.76MHz±30kHz White

### ③ Package

Code	Package
P	Bulks
TB	Tab Box

*Back to 1st Page - Chip Ceramic Filters - LTCS10.7M*