





Shenzhen Kento Electronic Co., Ltd

Specification for LED Product

Part No.: 3AG4HD01

■ Size(mm)

Package Dimensions(mm)

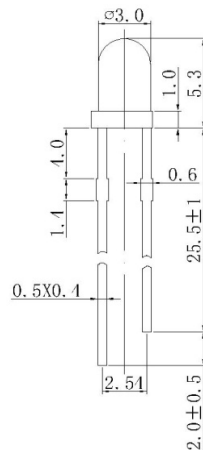

Notes:

All dimension units are millimeters.

All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted.

An epoxy meniscus may extend about 1.5mm down the leads.

Burr around bottom of epoxy may be 0.5mm max.

Synopsis:

3mm Round Type

Green Diffused Lens

Green LED Lamp





Shenzhen Kento Electronic Co., Ltd

Model: 3AG4HD01

■ Typical Electrical & Optical Characteristics (Ta = 25°C)

ITEMS	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Forward Voltage	VF	IF = 20mA	1.8	1.9	2.2	V
Reverse Current	IR	VR = 5V	---	---	1.1	μA
Dominant Wavelength	λ D	IF = 20mA	570	---	574	nm
Luminous Intensity	IV	IF = 20mA	58	74	95	mcd
50% Power Viewing Angle	2θ½	IF = 20mA	---	40	---	deg

■ Absolute Maximum Ratings at (Ta = 25°C)

ITEMS	SYMBOL	ABSOLUTE MAXIMUM RATING	UNIT
Forward Current	IF	50	mA
Peak Forward Current	IFP	220	mA
Continuous Forward Current	IL	20	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	105	mW
Operation Temperature	Topr	-40 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +80	°C
Lead Soldering Temperature	Tsol	Max.260°C for 5 sec Max.	

IFP Conditions: Pulse Width ≤ 10msec duty ≤ 1/10


Tsol Conditions: 4mm from the base of the epoxy bulb




Shenzhen Kento Electronic Co., Ltd

Model: 3AG4HD01

■ Spatial Distribution

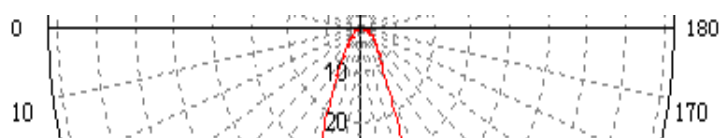

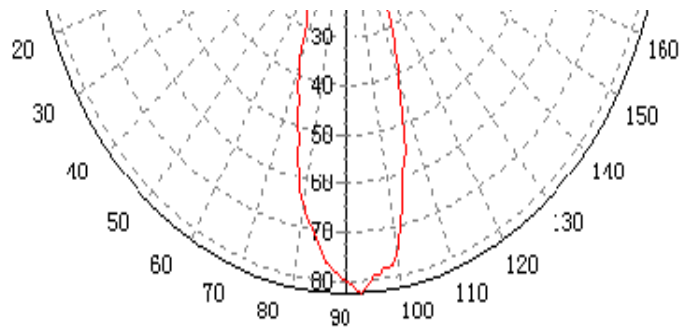

■ Reliability Performance



Test Classification	Test Item	Test Conditions	Test Duration	Sample Size	Standard
Life Test	Life Test	Ta=25°C±5°C, IF=20mA	1000(hrs)	10PCS	
Environment Test	Thermal Shock	-10°C±5°C ←→ +100°C±5°C 5min. 10sec. 5min.	100(cycles)	10PCS	
	Temperature Cycle	-55°C±5°C ←→ +85°C±5°C 30min. 5min. 30min.	100(cycles)	10PCS	
	High Temperature High Humidity	Ta=85°C±5°C RH =85%±0.5 %RH	240(hrs)	10PCS	
	High Temperature Storage	Ta=100°C±5°C	1000(hrs)	10PCS	
	Low Temperature Storage	Ta=-55°C±5°C	1000(hrs)	10PCS	
	Resistance Soldering	Ta=260°C±5°C	5 (sec.)	10PCS	
Mechanical Test	Lead Integrity	Load 2.5 N(0.25 kg) 0° ~ 90° ~ 0°	3 (times)	10PCS	





Shenzhen Kento Electronic Co., Ltd



Model: 3AG4HD01

■ Typical Optical/Electrical Characteristics Curves (Ta=25°C Unless

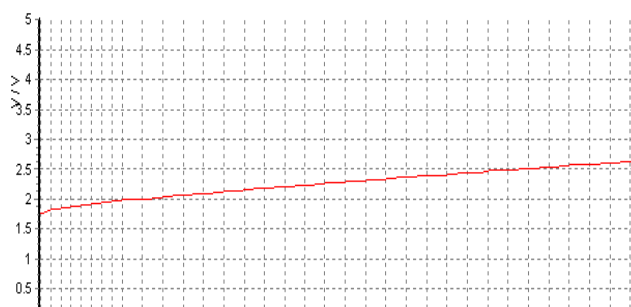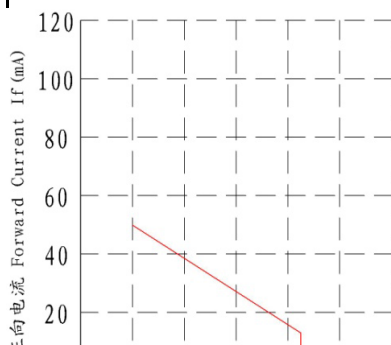

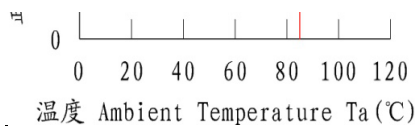


Current-Voltage Curve

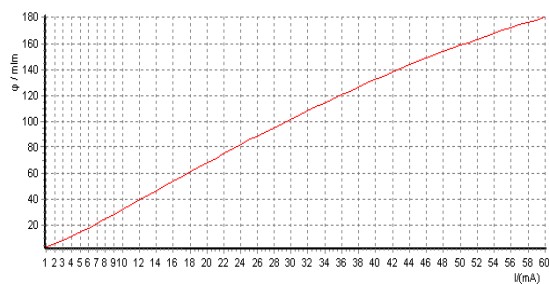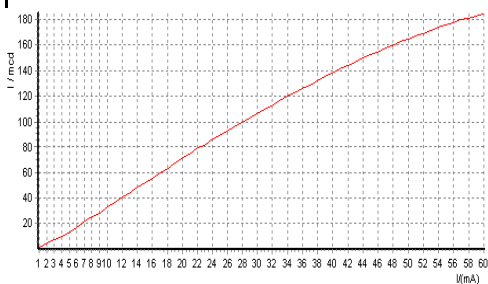

Current-Luminous intensity Curve

Current-Luminous flux Curve

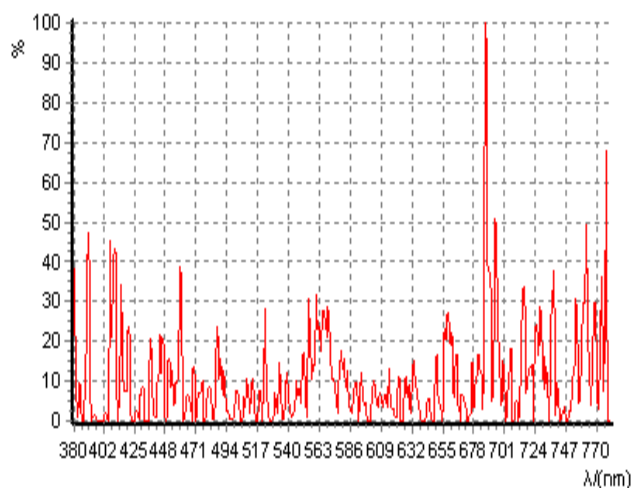


Wavelength




Shenzhen Kento Electronic Co., Ltd

Model: 3AG4HD01

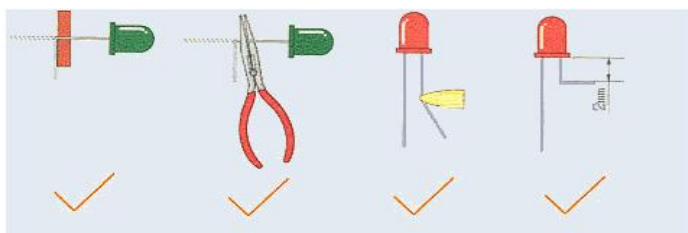

Circuit model A

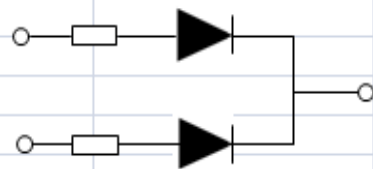

Circuit model B

