


WSL072ZW, WSL080ZW

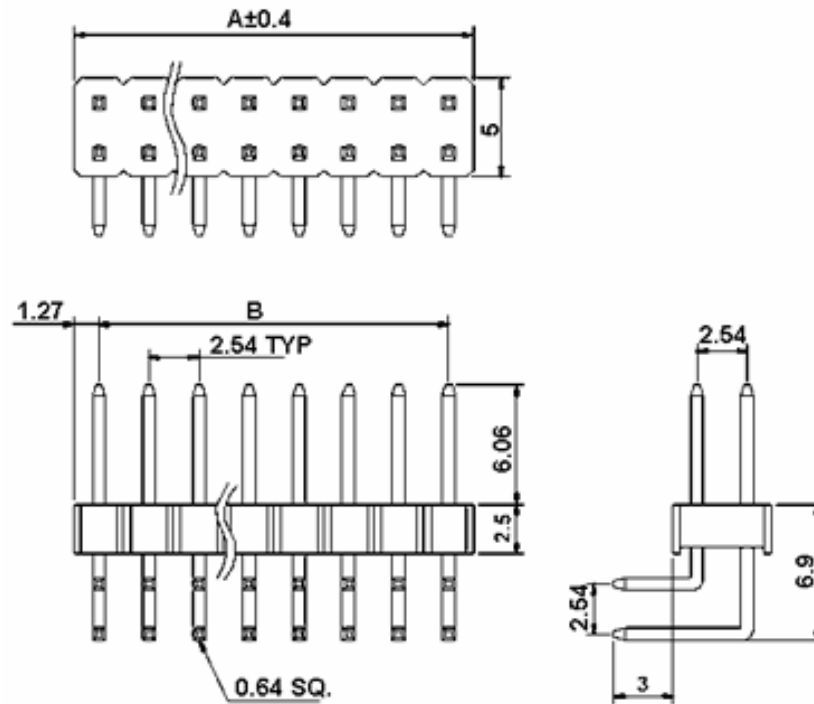

Features

- Tin-plated version
- Arbitrary mounting

Technical Specifications

Insulation Shell:	Polyamide (UL94V-0)
Contact Material:	Brass
Contact Surface:	Tin
Rated Current:	1A
Temperature Range:	-55...+105°C
Dielectric Strength (1 Min.):	1000V AC
Insulation Resistance (500V DC):	1000MW

Dimensions

A:	2,54mm x Number of Contact Pins
B:	2,54mm x (Number of Contact Pins - 1)
Pin Cross Section, Max.:	0,64x0,64mm