




DEGSON ELECTRONICS CO., LTD.



Product Specification



DG25R-A

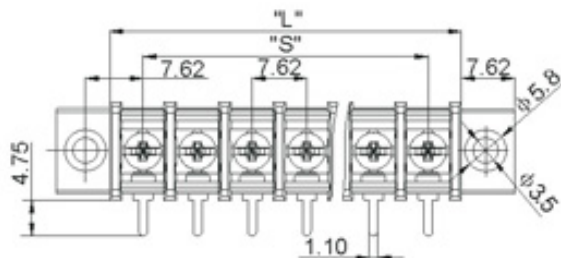

$S = 7.62 \times (P-1)$
 $L = 7.62 \times (P-1) + 9.12$

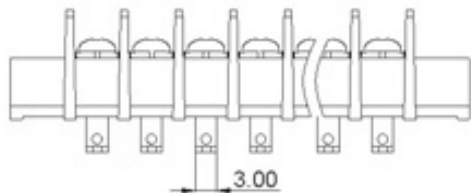


Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.74	24.36	31.98	39.60	47.22	54.84	62.46	70.08	77.70	85.32	92.94	100.56	108.18	115.80
S(mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	123.42	131.04	138.66	146.28	153.90	161.52	169.14	176.76	184.38	192.00	199.62			
S(mm)	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	182.88	190.50			

Approval	UL	CE
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm ²
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ/DC500V	
Mechanical		
Max. Torque Value	0.5Nm 4.4Lb.in	
Ambient temperature	-40°C~+105°C	

Dimensions	
Pitch	7.62mm(.300")
Poles	2P-24P

Material	
Housing	PA66, UL94V-0
Terminal	Brass, 0.8t, Tin Plated
Screws	Steel, M3 Ni Plated

HOW TO ORDER

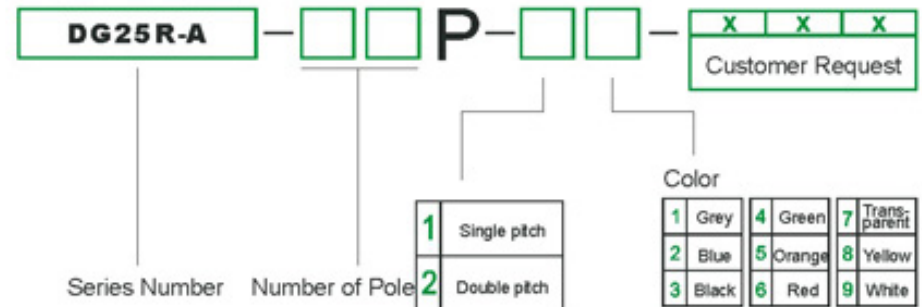

		DEGSON ELECTRONICS CO., LTD.
	NAME	DG25R-A