
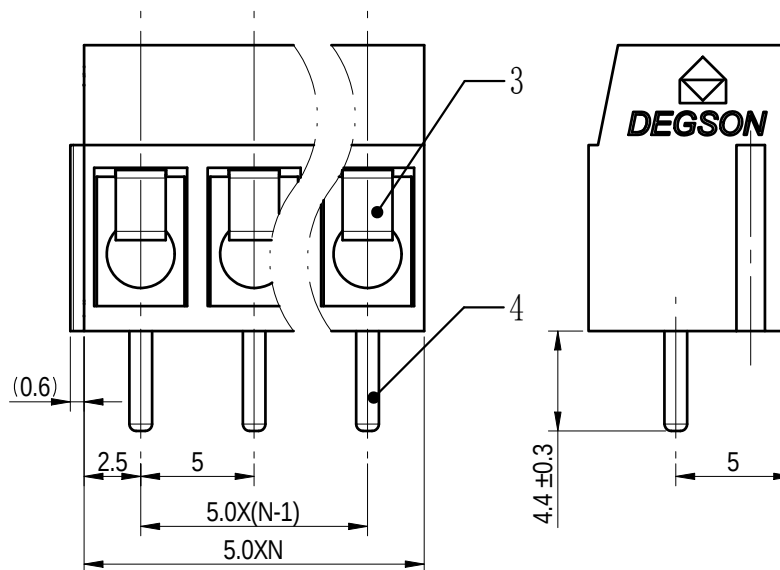
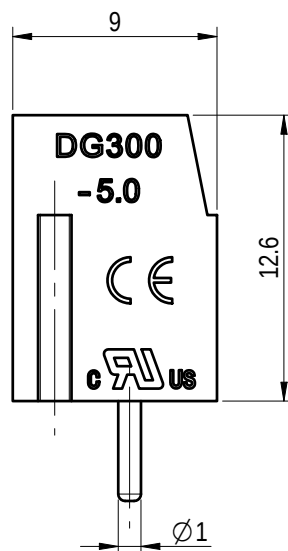


Technical drawing of a mechanical part showing dimensions and a hole. The drawing includes a vertical dimension of 5, a horizontal dimension of 3.1, and a horizontal dimension of 5. A hole is shown with a diameter of $\varnothing 1.2$.

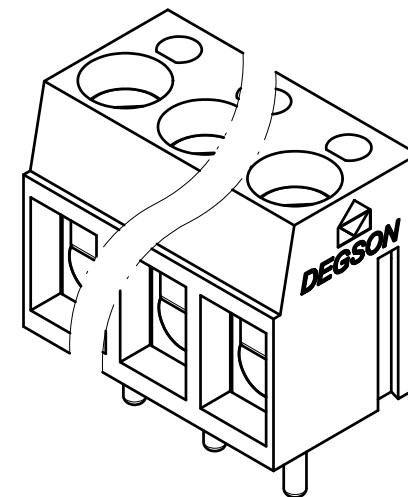

The A&Z(H) in the name means: A(H) and Z(H).

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	250/24	/
工频耐压/Withstanding voltage(V/1Min)	/	AC2000	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.29/2.6		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	22~14/ 1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/N=02~24P		
剥线长度/Stripping length(mm)	5~6		
使用温度范围/Operating temperature(°C)	-30~+120		
符合RoHS 环保要求/Conform to RoHS	Yes		

		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华		MAT NO./REV: / 00		MAT STATUS: 批量	
CHKD: 陈招		NAME DG300-5.0-XXP-1Y-00A&Z(H)			
DRFT: 龚徐涛		DRAWING NO. 200103483		TYPE CUSTOMER DRAWING	
				DRAWING STATUS 已发布	
				SCALE 3:1	
				SHEET 1/1	

00			龚徐涛	2022.11.18
REV	ECN	DESCRIPTION	DRFT	DATE