


Gas that can be detected



Methane

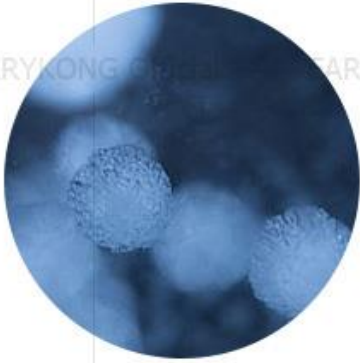


propane



natural gas



Share the device to app of all your families

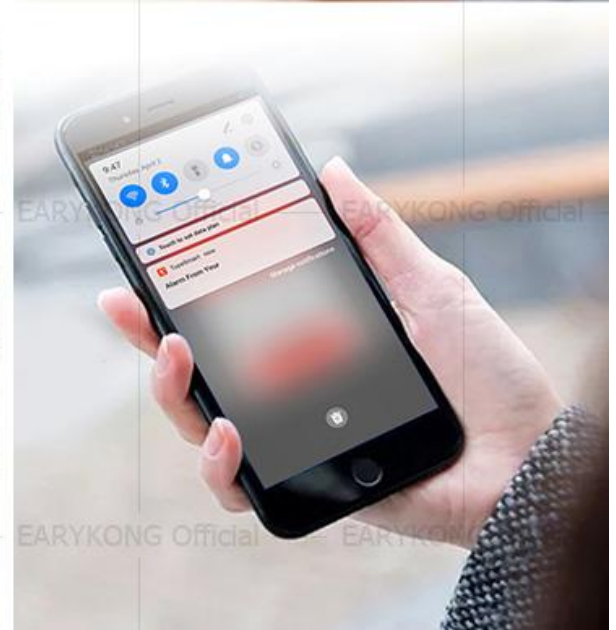


LCD Display

High-end product to protect your house security.

Notice: The temperature display is the temperature of the host. The temperature will be a little higher than the ambient temperature.

LCD display

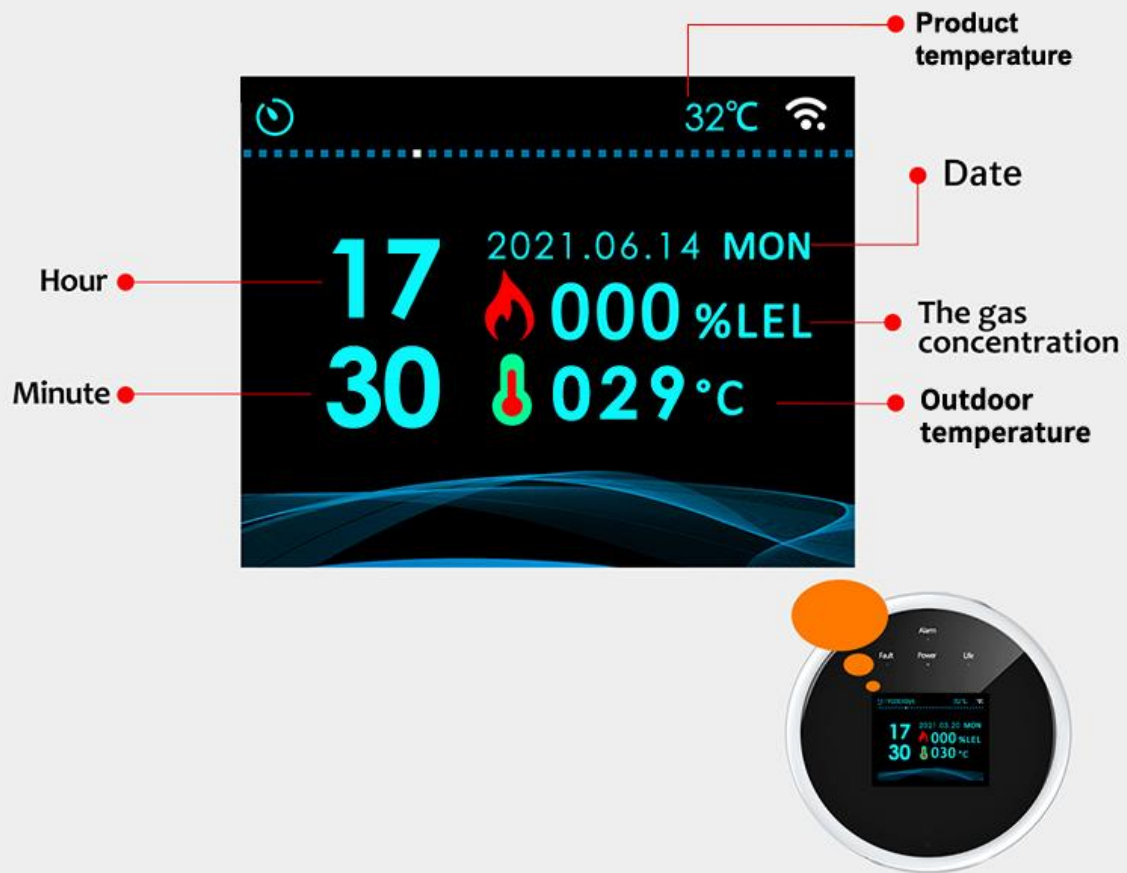


Wide range of applications

Wide range of applications

Kitchen

gas water heater

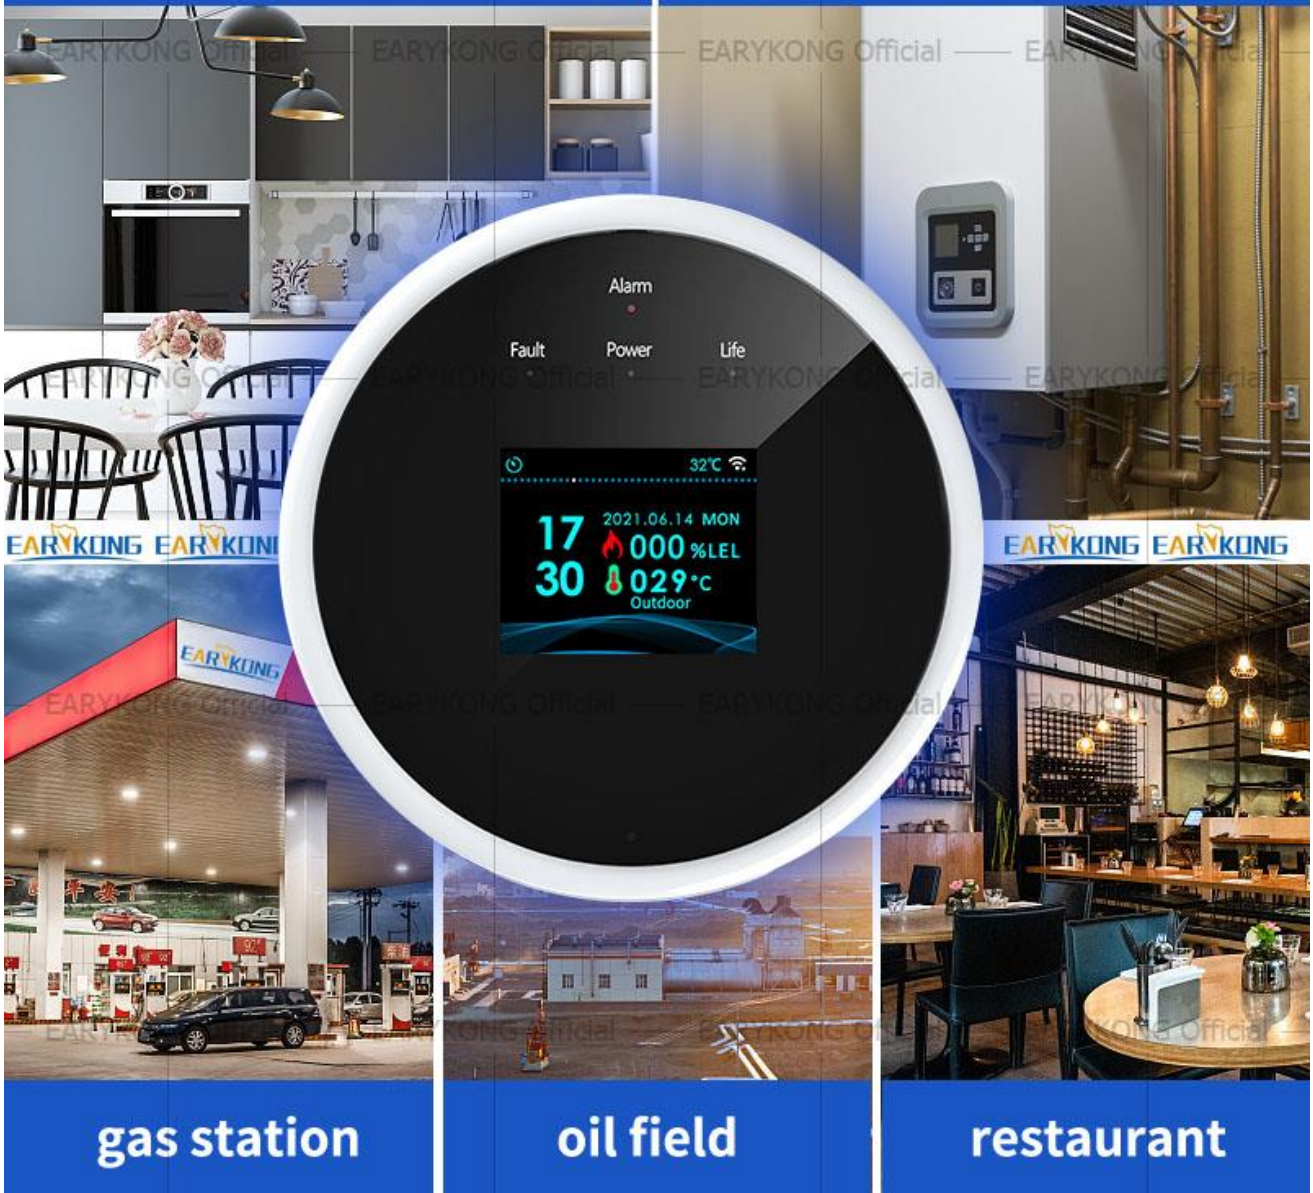

APP alarm reminder

Intelligent detect all kinds of gas leakage (such as petroleum gas, natural gas, methane), reduce accident.

EARYKONG






Heat alarm

When the temperature around detector increases to preset value, the red alarm indicator flashes, the value ring is displayed, "Heat alarm, Check now" is heard and a same text notification is pushed to your mobile.

High temperature alarm

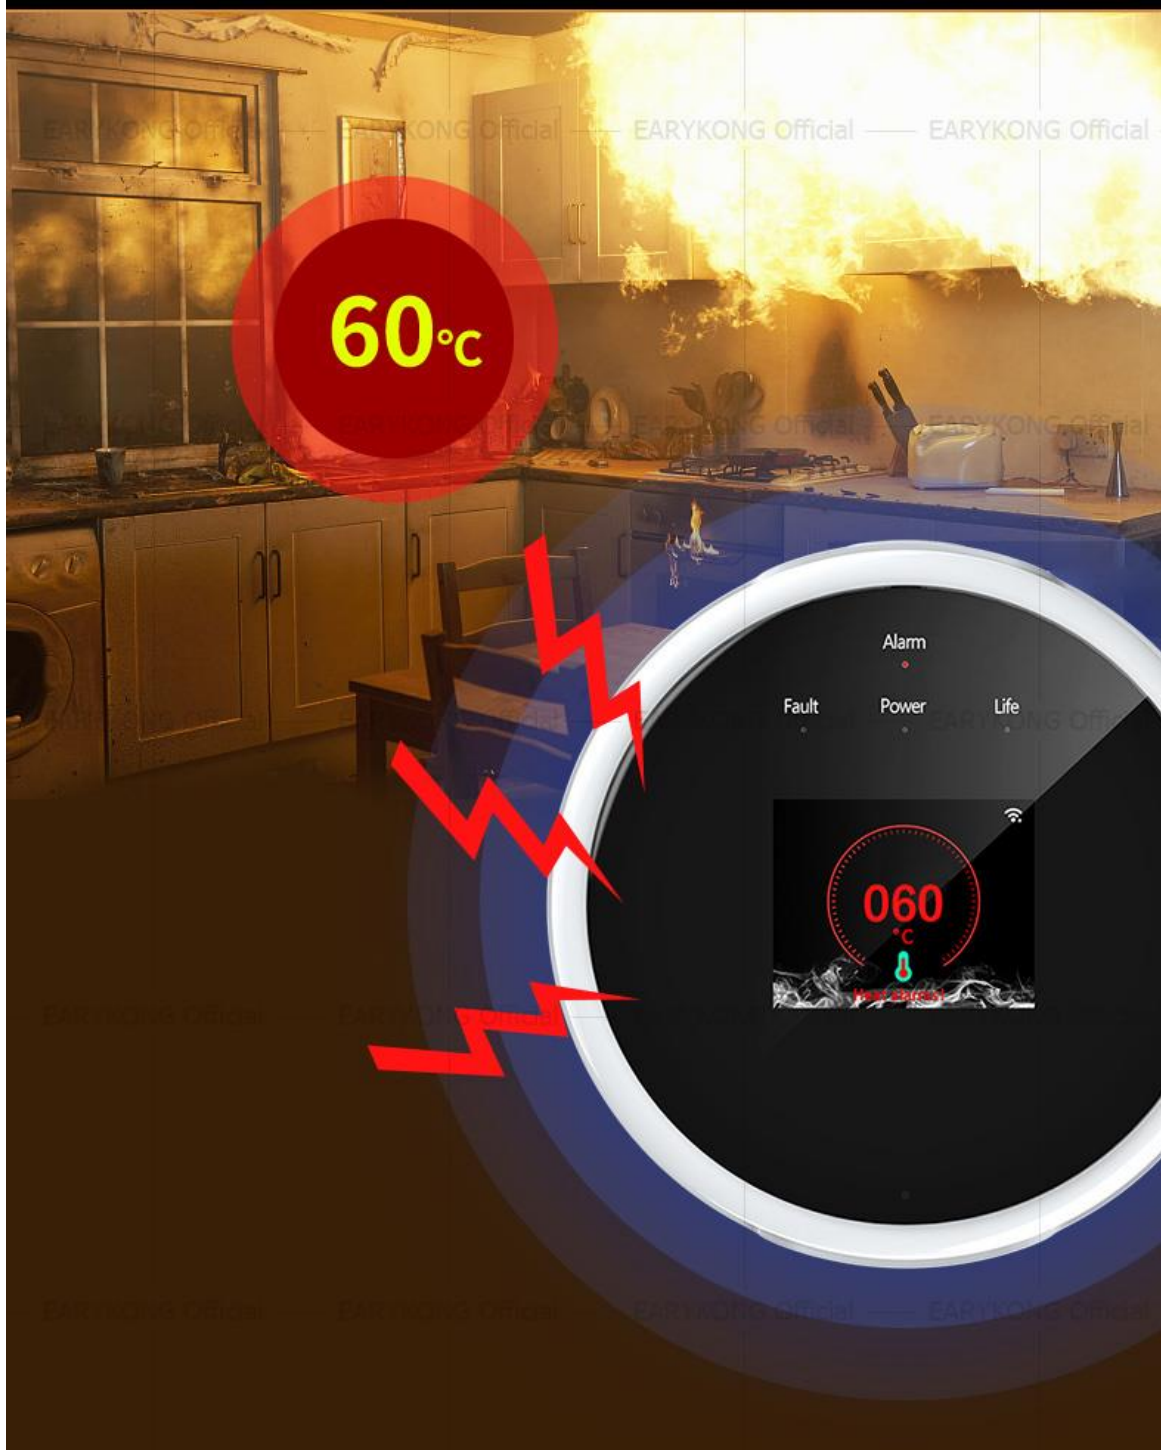

Product parameters

Power supply	Micro USB+5V/1A
Consumption	<200mA
Detecting gas	Natural gas(CH ₄), LPG
Working Environment	Temperature: -10~55°C
Sample	Diffusion
Range	0~100%LEL
Alarm setting value	6%LEL
Tolerance	±3%LEL
Response time	≦30 seconds
Heat alarm value	57°C
Alarm volume	≧70dB
Valve/manipulator drive output	12V/300mA output for 15 seconds
Warm-up time	180 seconds
Sensor life	5 years
Wi-Fi	2.4GHz IEEE802.11b/g/n
Dimensions	86x86x24.5mm