

HCC06-SM-10/120H-EP-D

FEATURES



Colorful touch LCD, Ip65 protection degree



Ac coupling to retrofit existing solar system



Max. 16 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel



Max. charging/discharging current of 250A



6 time periods for battery charging/discharging




Support storing energy from diesel generator




CERTIFICATIONS



PRODUCT CHARACTERISTICS

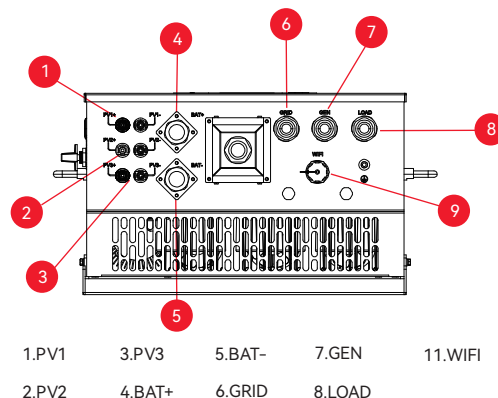

LCD DISPLAY ICONS

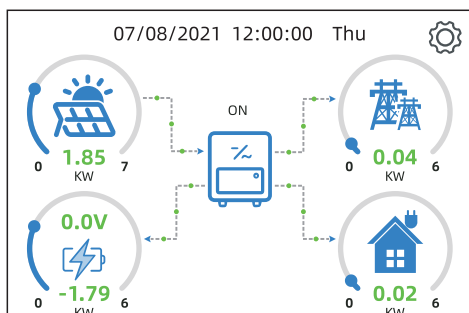

BASIC SYSTEM ARCHITECTURE



Data Sheet

Model	HCC06-SM-0100H-EP-D	HCC06-SM-0120H-EP-D
Battery Input Data		
Battery Type	Lead-acid or Li-Ion	
Battery Voltage Range(V)	40~60	
Max. Charging Current(A)	220	250
Max. Discharging Current(A)	220	250
Charging Curve	3 Stages / Equalization	
External Temperature Sensor	yes	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS	
PV String Input Data		
Max. DC Input Power(W)	13000	15600
PV Input Voltage(V)	370V (125V~500V)	
MPPT Voltage Range (V)	150~425V	
Full Load DC Voltage Range	200~425V	
Start-up Voltage (V)	125V	
PV Input Current(A)	26+26+26	26+26+26
No.of MPPT Trackers	3	3
No.of Strings per MPPT Tracker	1+1+1	1+1+1
AC Input/Output Data		
Rated AC Output and UPS Power(W)	10000	12000
Max. AC Output Power(W)	11000	13200
Peak Power (off grid)	2 times of rated power, 10 S	
AC Input/Output Rated Current(A)	45.5/43.5	54.6/52.2
Max.AC Input/Output Current(A)	50/47.9	60/57.4
Max. Continuous AC Passthrough(A)	60	60
Power Factor	0.8 leading - 0.8 lagging	
Output Frequency and Voltage	50/60Hz; 220/230Vac	
Grid Type	Single Phase	
Total Harmonic Distortion (THDi)	<3% (of nominal power)	
DC Current Injection	<0.5% In	
Efficiency		
Max. Efficiency	97.60%	
Euro Efficiency	96.50%	
MPPT Efficiency	>99%	
Protection		
PV Arc Fault Detection	Yes	
PV Input Lightning Protection	Yes	
Anti-islanding Protection	Yes	
PV String Input Reverse Polarity Protection	Yes	
Insulation Resistor Detection	Yes	
Leakage current monitoring protection	Yes	
Output Over Current Protection	Yes	
Output Shorted Protection	Yes	
Output Over Voltage Protection	Yes	
Surge Protection	DC Type II / AC Type II	
Over Voltage Category	DC Type II / AC Type III	
Certifications and Standards		
Grid Regulation	IEC62116/IEC61727/EN50549-1	
Safety EMC / Standard	IEC/EN 61000-6/2/4, IEC/EN 62109-1, IEC/EN 62109-2	
General Data		
Operating Temperature Range(°C)	-40~60°C, >45°C Derating	
Cooling	Smart cooling	
Noise(dB)	<50 dB	
Communication with BMS	Rs485; CAN	
Monitoring mode	WIFI, APP	
Weight(kg)	31	
Cabinet size(mm)	446W×576H×254D(Excluding connectors and brackets)	
Protection Degree	IP65	
Installation Style	Wall-mounted	