


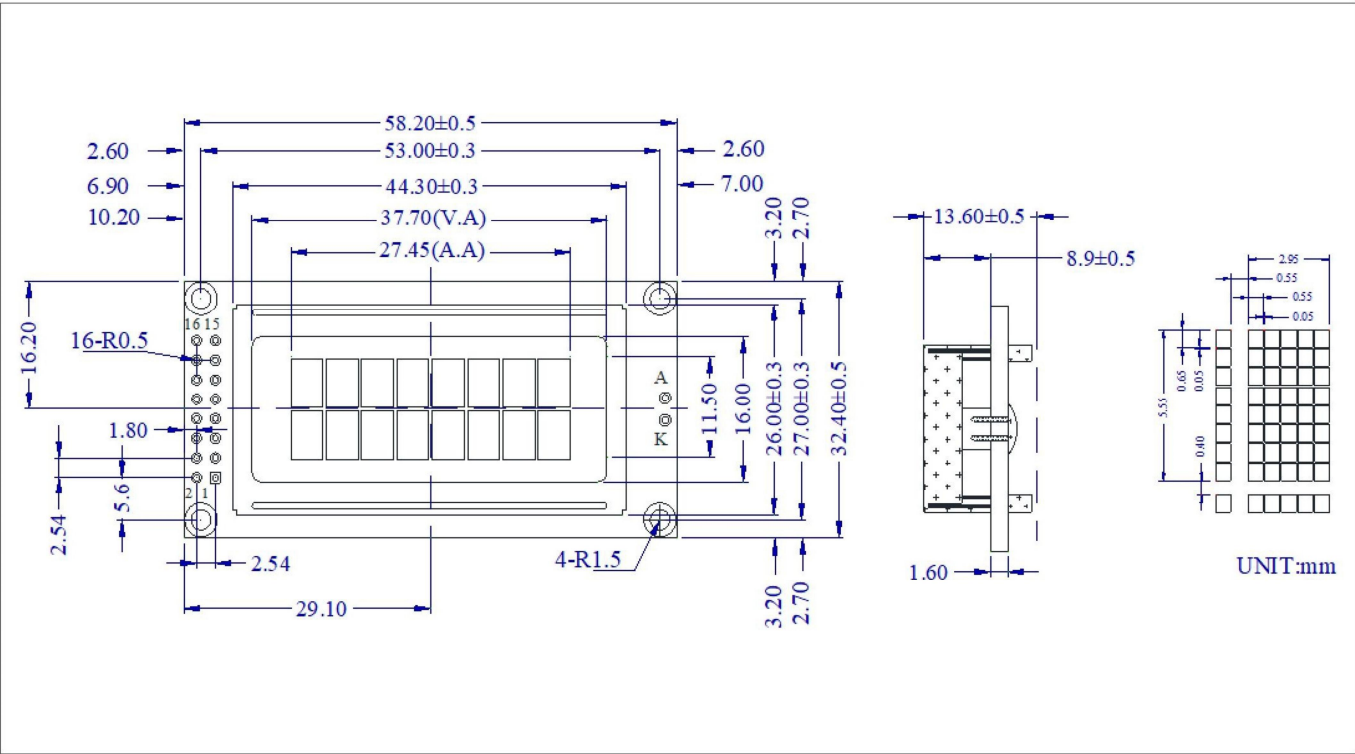

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	V _{DD} - V _{SS}	-0.3	7.0	V
Supply Voltage(LCD)	V _O - V _{SS}	-0.3	10.0	V
Input Voltage	V _i	-0.3	V _{DD} + 0.3	V
Operating Temp.	T _{opr}	-20	70	°C
Storage Temp.	T _{stg}	-40	80	°C

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	58.2 x 32.4 x 13.6	mm
Viewing Area (W x H)	37.7 x 16.0	mm
Character size (W x H)	2.95 x 5.50	mm
Dot Size (W x H)	0.55 x 0.65	mm
Weight	Approx. 26	g


ELECTRICAL CHARACTERISTICS (V_{DD}=5V±0.15V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	V _{IH}	--	0.7V _{DD}	--	V _{DD}	V
Input Low Voltage	V _{IL}	--	- 0.3	--	0.6	V
Output High Voltage	V _{OH}	I _{OH} = - 0.1mA	0.8V _{DD}	--	V _{DD}	V
Output Low Voltage	V _{OL}	I _{OL} = 0.1mA	0	--	0.4	V
Supply Current	I _{DD}	V _{DD} = 5.0V	--	1.5	3.0	mA
LCD Driving Voltage	V _O - V _{SS}	T _a =25° C	--	5.0	--	V

PIN DESCRIPTIONS

Pin	Symbol	Level	Function
1	GND	0V	GND
2	V _{DD}	5V	Power supply for logic
3	V _O	--	No connection
4	RS	H/L	H : Data L : Instruction code
5	R/W	H/L	H : Read L : Write
6	E	H,H⇒L	Enable signal Read data when E is high Write data at falling edge of E
7	DB0	H/L	Data bus
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	LEDA	5.0(3.0V)	5.0V Standard, 3.0V is Optional
16	LEDK	0V	

BLOCK DIAGRAM(PARALLEL MODE)

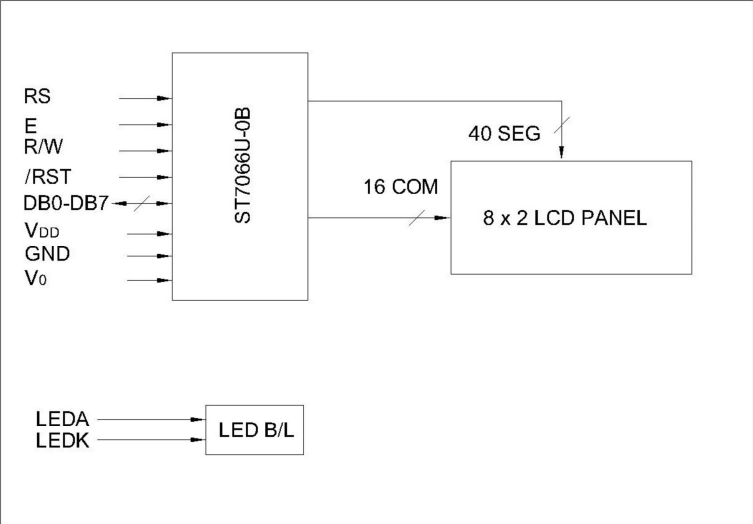

LED BACKLIGHT SPECIFICATIONS (T_a=25° C)

Item	Symbol	Typ.	Max.	Unit
Forward Voltage	V _f	5.0	5.2	V
Forward Current	I _f	15	20	mA
LED Color		White		