

# PRODUCT SPECIFICATION



**Part No. : JH-5630W12JC2240-T16A-1**  
**High Power LED**


## Catalog

1.Product Features	P2
2.Dimensions	P2
3.Absolute Maximum Rating	P3
4.Optical Character	P3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Cautions	P6


# 1.Product Features

- High Brightness White LED
- Plane Package
- Viewing Angle 120 Degree
- Chip Material: AlGaInP
- RoHS Compliant


# 2.Dimensions

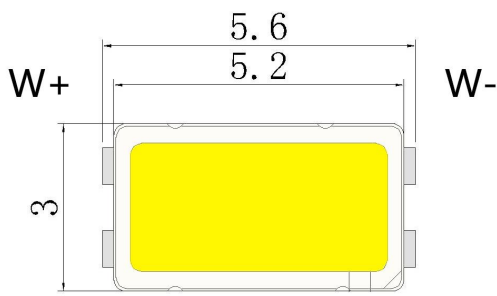

Top view

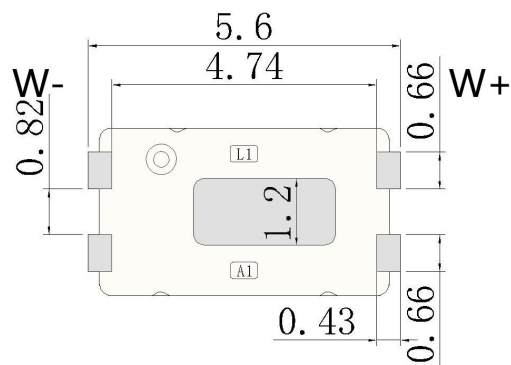

Bottom view

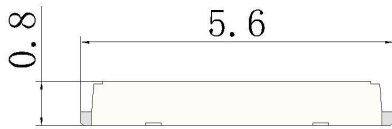

Side view



### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.1\text{mm}$  unless otherwise noted.

### 3. Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	300	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	500	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	1	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +60°C	
Storage Temperature Range	TSTG	-35°C to +80°C	
Lead Soldering Temperature	TSOL	260°C	

### 4. Optical Character @ Ta=25° C





Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	W	3.0	3.2	3.4	V	IF=300mA
Luminous Flux	Φ	W	160	170	180	Lm	IF=300mA
Color Temperature	Tc	W	6000	6500	7000	K	IF=300mA
Reverse Current	IR		0		10	μA	VR=5V
Viewing Angle	2θ1/2				120	deg	IF=300mA
Recommend Forward Current	IF(rec)	W			300	mA	

#### Notes:


Measurement tolerance of forward voltage ±0.1V

## 5. Optical Character Curves


( 25 ° Ambient Temperature Unless Otherwise Noted )

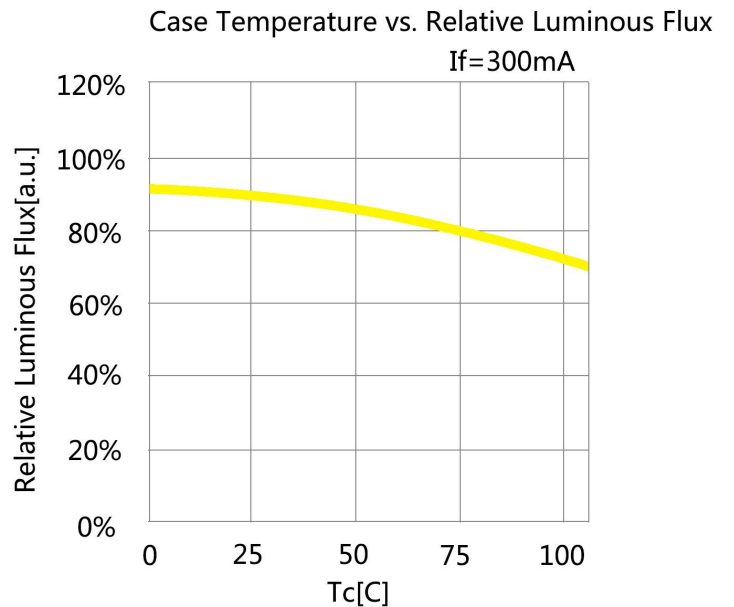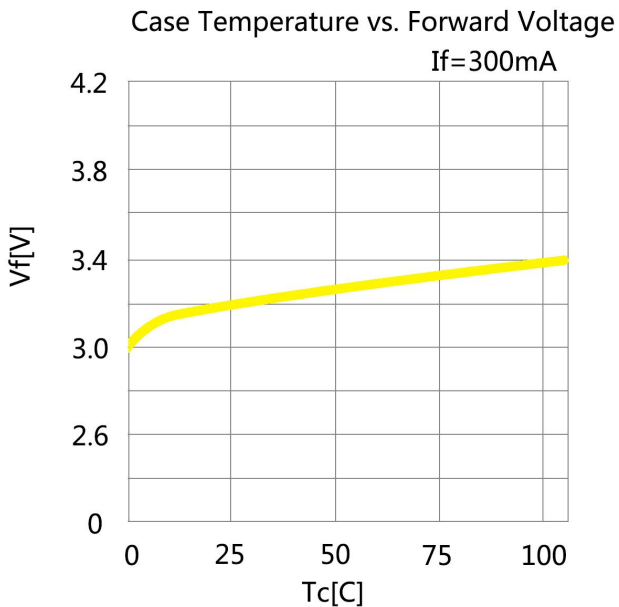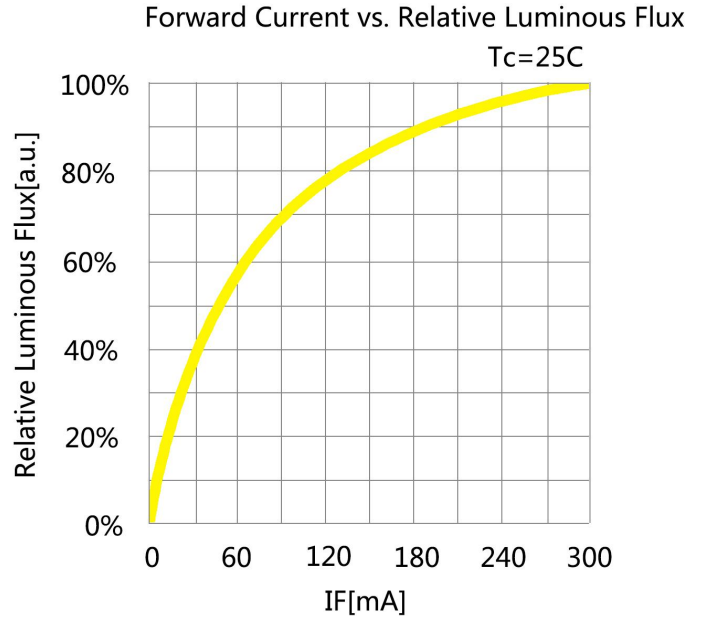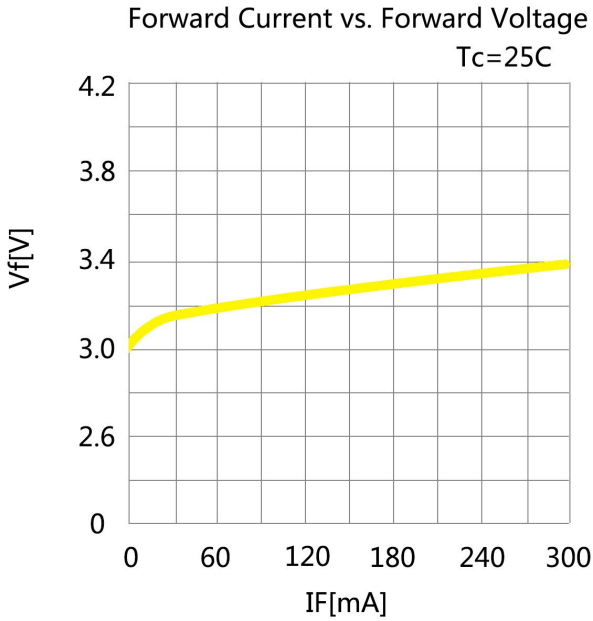

## 6. Spectrum Curves

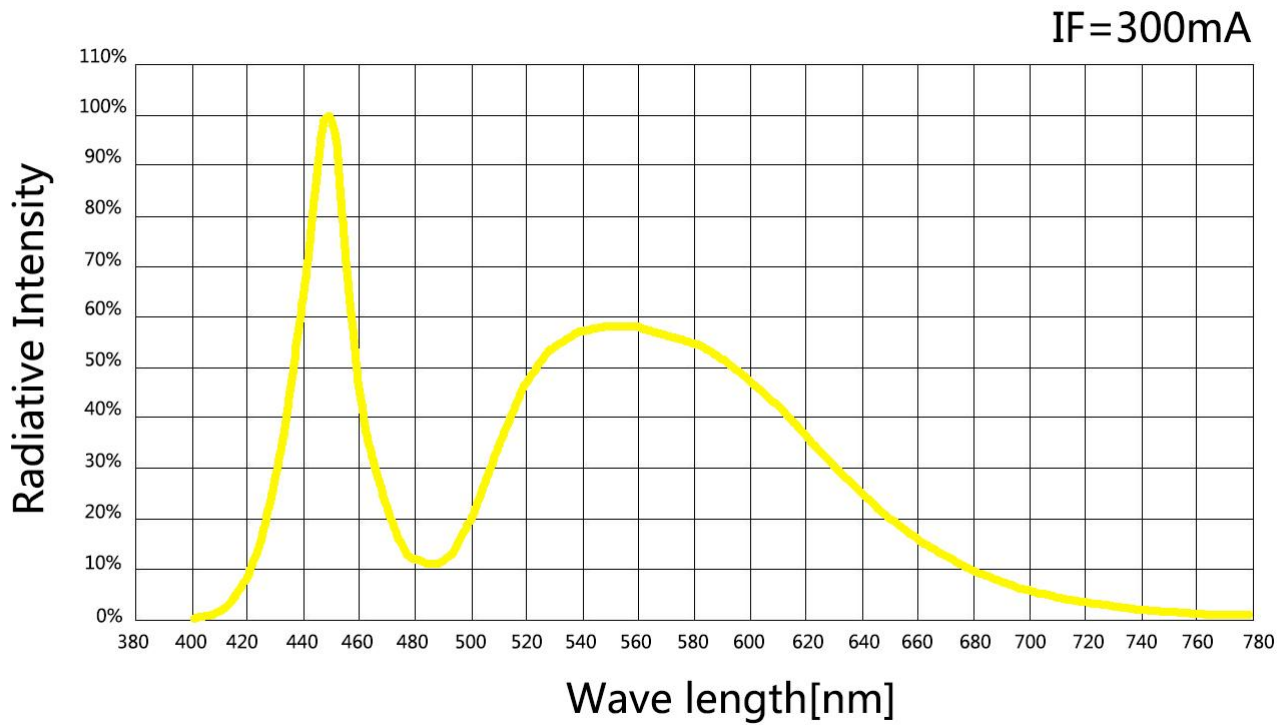

## 7. Viewing Angle Curves

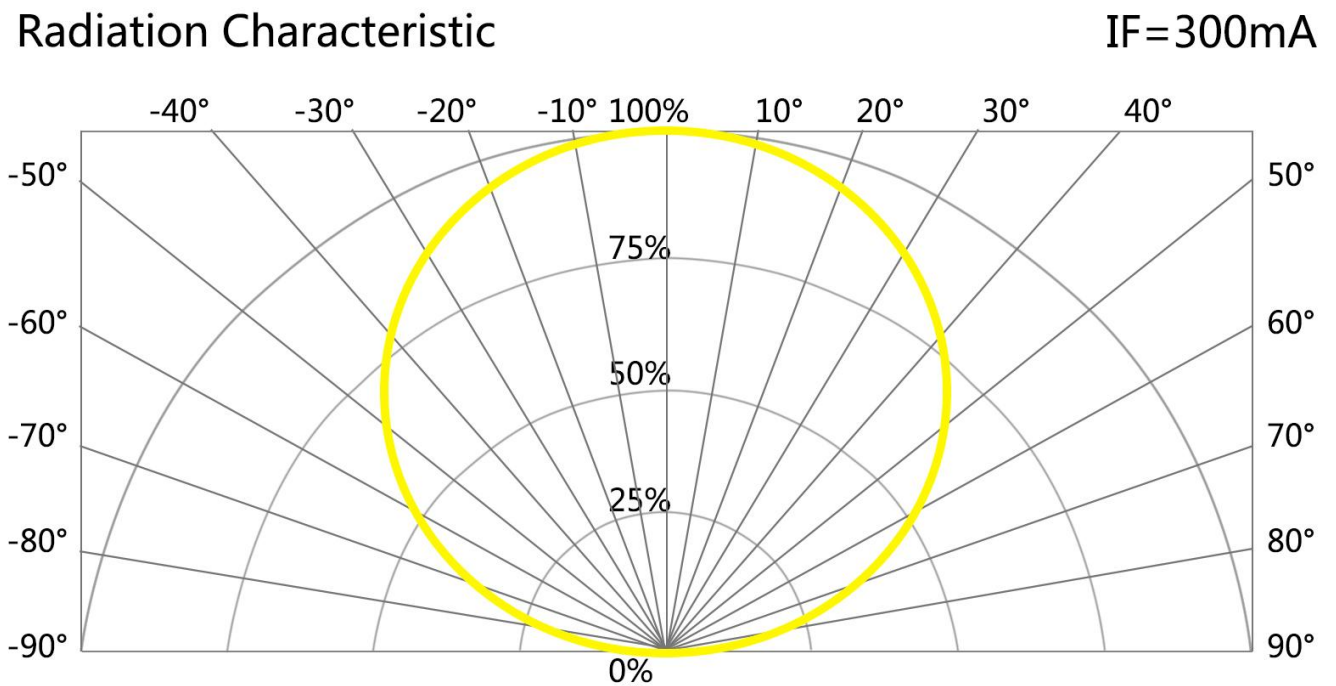

## 8. Cautions


### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



### 2. Heat Dissipation

- A、 It is recommend to configure reasonable heat dissipation device for the product.
- B、 The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

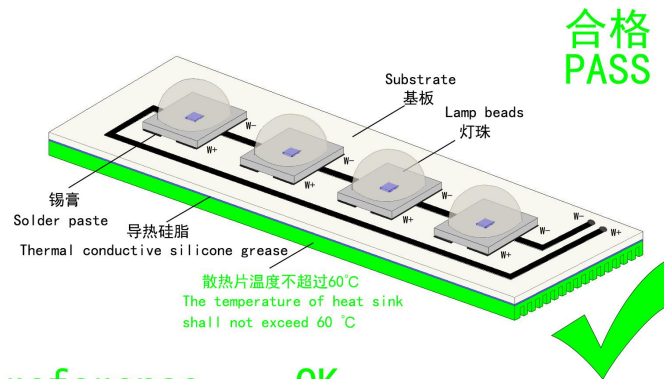

### 3. Installation Conditions

reference OK

- A、 Do not exert any pressure on the LED area during the use of the led beads, such as below:

