
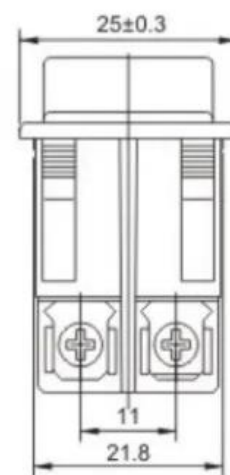
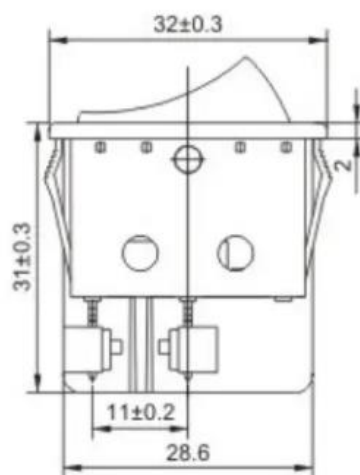


Housing:	Nylon 66	Button:	Nylon 66
Terminal:	Brass with silver plated	Button color:	Standard red, green, yellow and blue is available
Rating:	20A 125VAC/15A 250VAC	Housing color:	Standard black, white is available
Contact & Operation:	DPST, ON-OFF	Lamp Voltage:	220V/120V/12V/24V
Contact Resistance:	35mΩ max	Operating Temperature:	-25°C~+85°C
Insulation Resistance:	100mΩ min (500VDC)	Electrical Life:	≥ 10,000 Cycles
Dielectric strength:	1500VAC 1 minute	Mechanical Life:	≥ 100,000 Cycles
Certification:	CE, CQC, TUV, SGS	OEM or ODM:	Available



KCD2-2-201NS ON-OFF