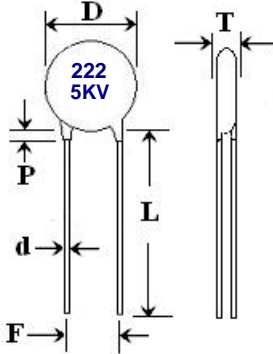


SPECIFICATION FOR APPROVAL

CERAMIC DISC CAPACITORS							
Customer:							
Capacitance: 2.2 nF	Tolerance: -20% ~ +80%	Issue No.					
Temp. Coef. Z5V	Q'ty of Sample: pcs	Issue Day. 13/07/2023					
Cust. P/N:	Part No. KV5K0222Z-L016BD9.5	Rated Voltage : 5000 VDC					
Diagram of Dimensions : (Unit: mm)							
		<p>D: <u>9.5 max.</u> T: <u>5.0 max.</u> F: <u>9.5 ±0.8</u> L: <u>25.0 min.</u> d: <u>0.6Ø ±0.05</u> P: <u>3.0 max.</u></p>					
SPECIFICATION			Initial Test				
Frequency = 1K Hz Temperature = 25 °C			No.	nF	Tanδ	I.R.	T.V.
1.	Dissipation Factor (Tan δ): 5 % Max.		2.				
2.	Insulation Resistance (IR) : 10,000 MΩ Min.		3.				
3.	Dielectric Strength Test : DC 8,750 V		4.				
4.	Case Insulation Test : DC 5,000 V		5.				
5.	Temperature Characteristics : ΔC/C= +30%,-80%,+10°C to +85°C		6.				
6.	Lead Pull Test : 1.0 Kg 5 Seconds.		7.				
7.	Coating : Epoxy resin coated		8.				
8.	For further details please visit the following link of our website:		9.				
	Hi-Voltage_20230529.pdf		10.				
APPROVED BY CUSTOMER			REMARK :				
Your Confirmation : <input type="checkbox"/> Approval <input type="checkbox"/> Conditional Approval <input type="checkbox"/> Rejection (Please send a copy for our ref.)			Spec. Applied by EIA RS198 Test Instruments: (1). Capacitance: (a).CHEN HWA 1062 L.C.R.METER (1Khz). (b).ESI410 OR HP 4277 L.C.R.METER(1Mhz). (2). Dissipation Factor: as the Item (1). (3). Insulation Resistance: GENERAL RADIO 1864 MEGOHM METER. (4).Dielectric Strength: PHIHON PUNCTURE TESTER				
Inspected by		Checked by	吳美華	Approved by	蘇彥華		