


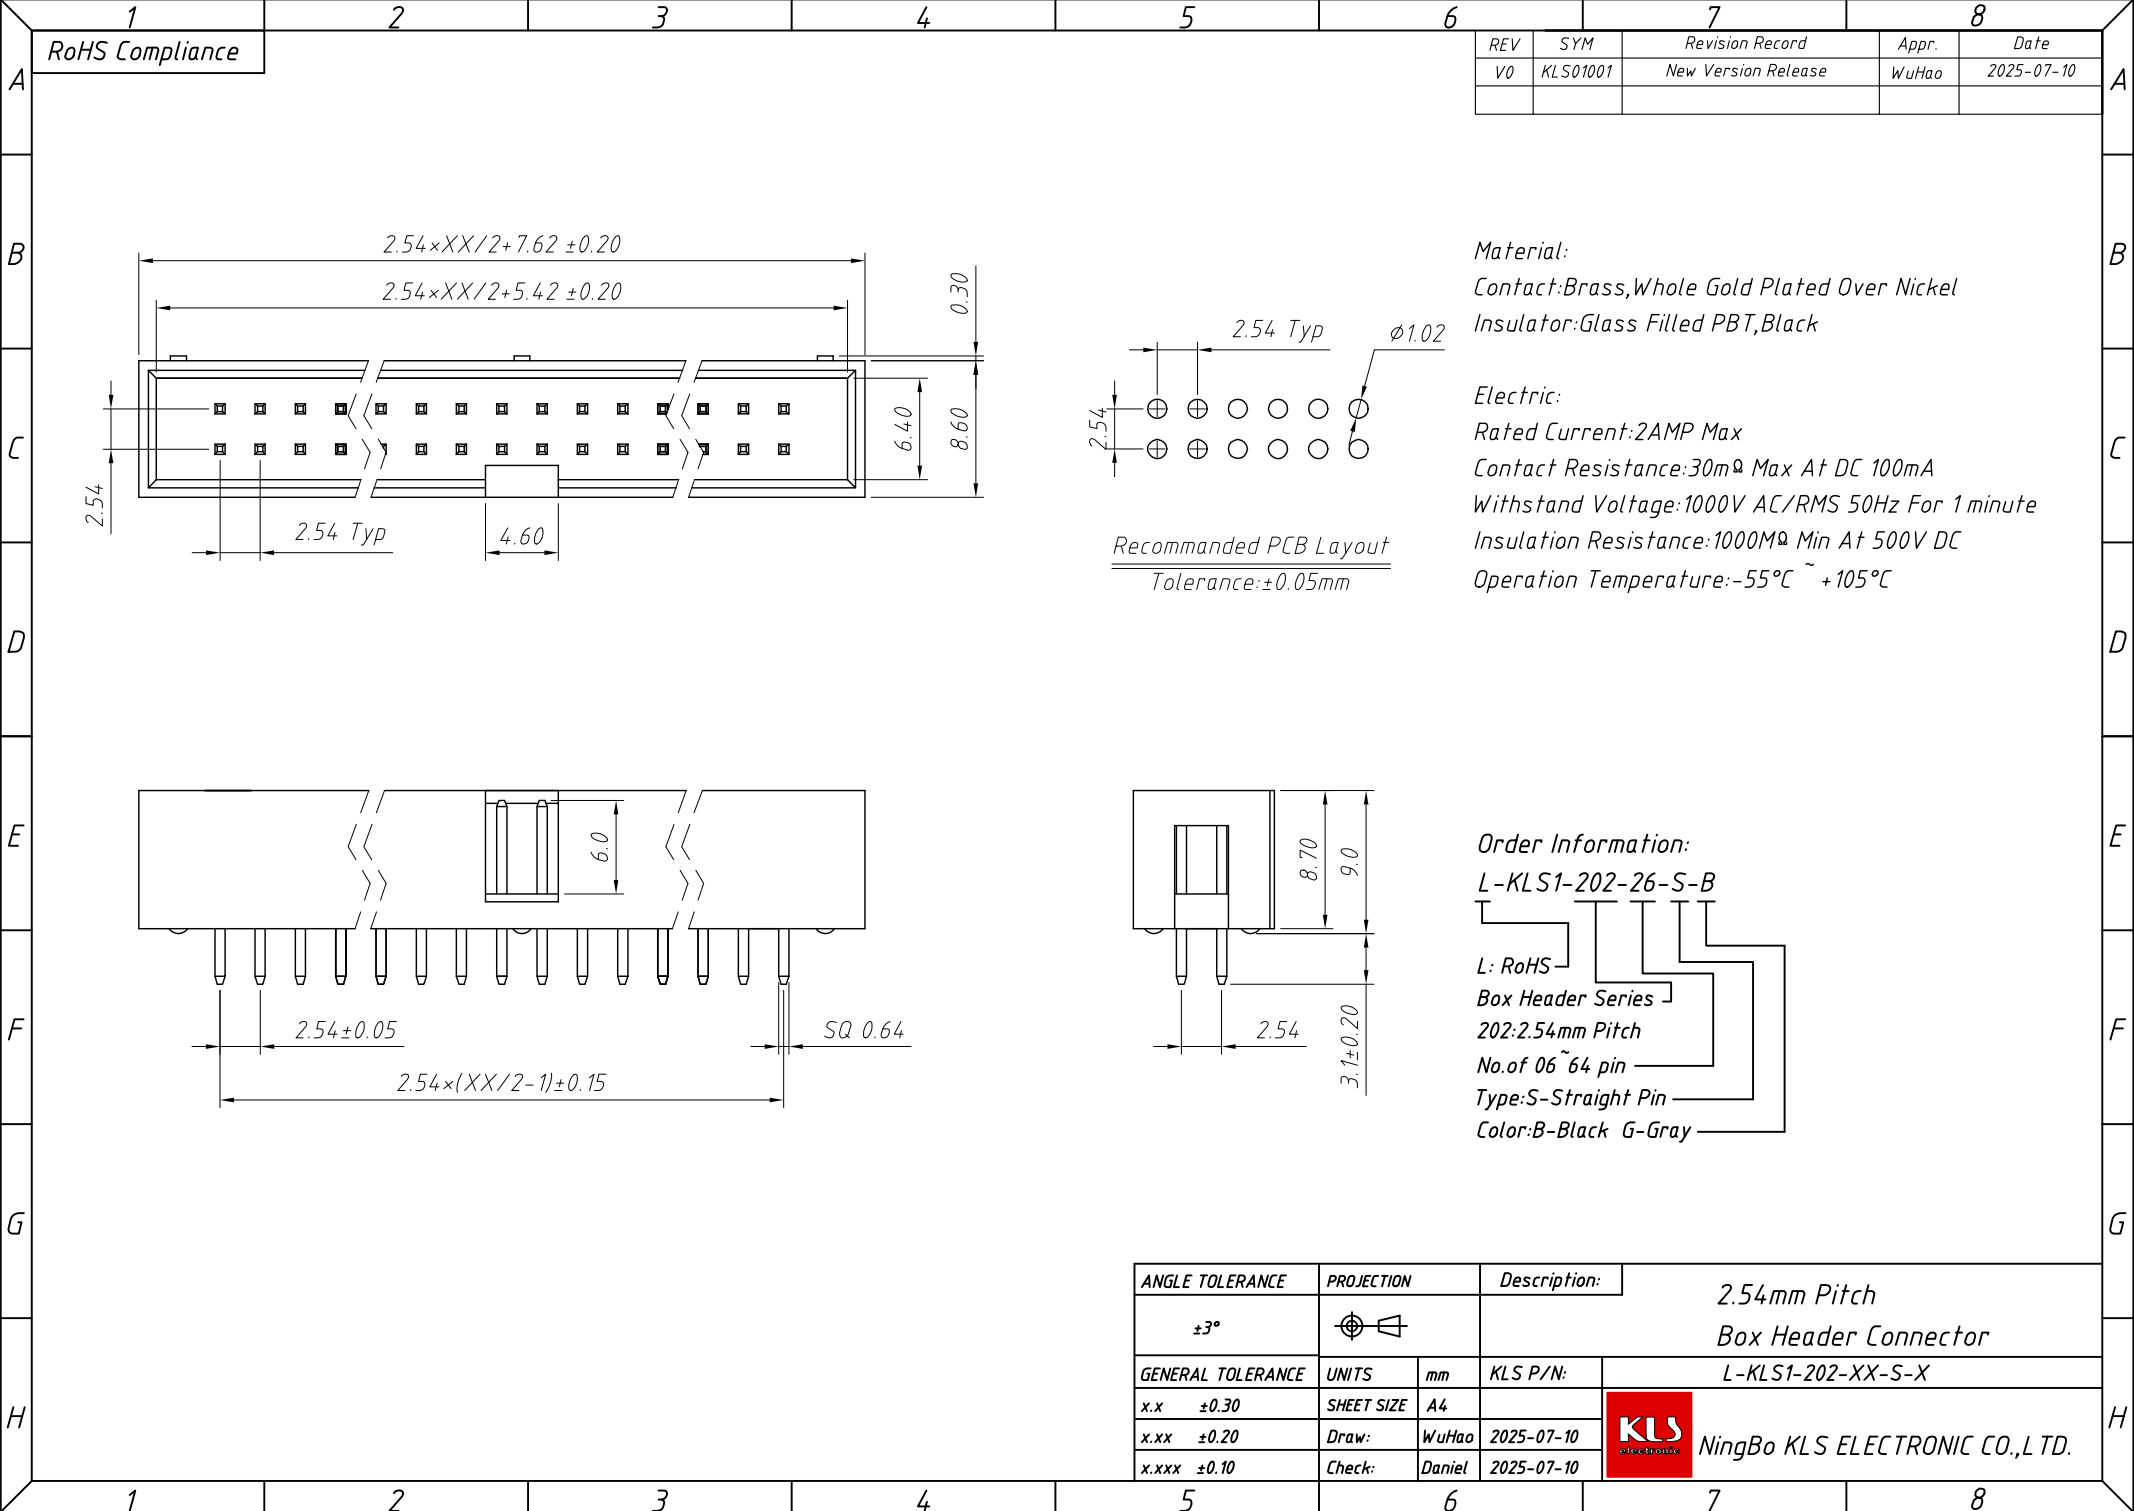

RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KL S01001	New Version Release	WuHao	2025-07-10

Material:
Contact:Brass,Whole Gold Plated Over Nickel
Insulator:Glass Filled PBT,Black

Electric:
Rated Current:2AMP Max
Contact Resistance:30m Ω Max At DC 100mA
Withstand Voltage:1000V AC/RMS 50Hz For 1 minute
Insulation Resistance:1000M Ω Min At 500V DC
Operation Temperature:-55 $^{\circ}$ C ~ +105 $^{\circ}$ C

Recommended PCB Layout
Tolerance: ± 0.05 mm

Order Information:
L-KLS1-202-26-S-B
L: RoHS
Box Header Series
202:2.54mm Pitch
No.of 06~64 pin
Type:S-Straight Pin
Color:B-Black G-Gray

ANGLE TOLERANCE	PROJECTION	Description:
$\pm 3^{\circ}$		2.54mm Pitch Box Header Connector
GENERAL TOLERANCE	UNITS	mm
x.x ± 0.30	SHEET SIZE	A4
x.xx ± 0.20	Draw:	WuHao 2025-07-10
x.xxx ± 0.10	Check:	Daniel 2025-07-10



NingBo KLS ELECTRONIC CO.,L TD.