



1
RoHS Compliance

Performance parameters	
Frequency Range	880-960/1710-1880MHz
Band Width	80/170MHz
Vswr	≤2.0
Gain	-3DBi
Impedance	50 OHM
Polarization	Vertical
Radiation	Omnidirectional
Max power	10 W
Temperature	-35° ~ +80°

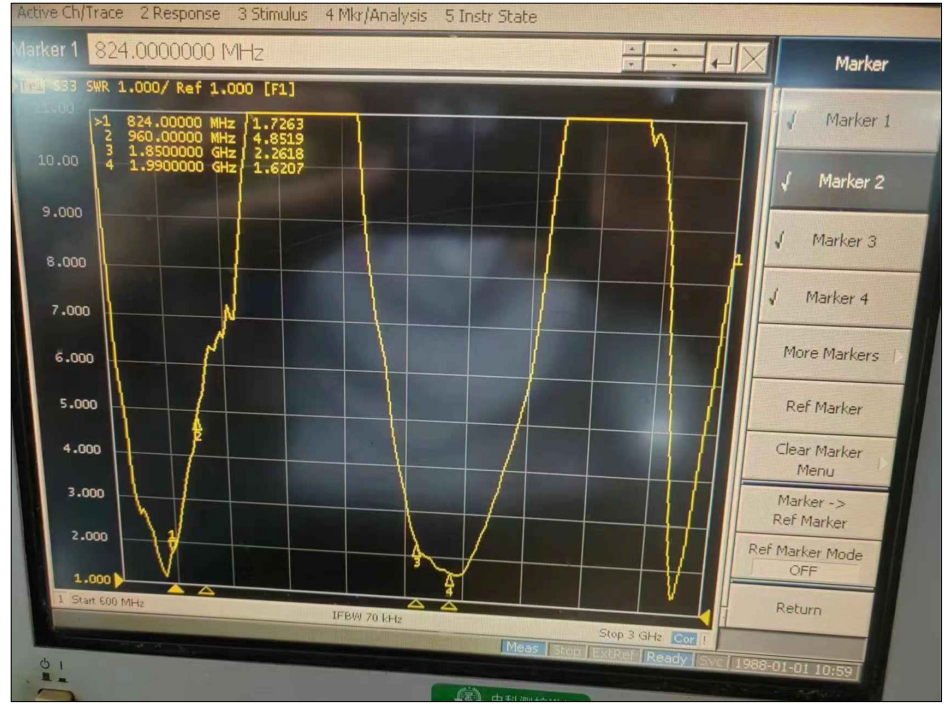

SMA Male Connector

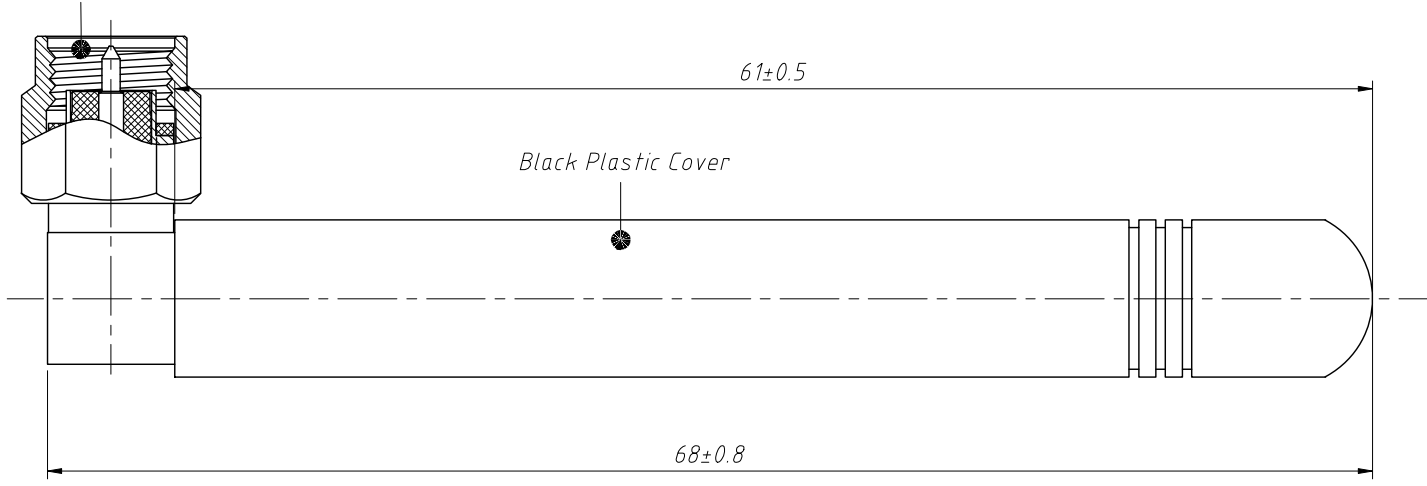

ANGLE TOLERANCE	PROJECTION	Description:	
±3°		GSM Rubber Antenna	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:
x.x ±0.30	SHEET SIZE	A4	L-KLS1-GSM-02-MR-68MM-D
x.xx ±0.20	Draw:	Daniel	2023-04-11
x.xxx ±0.10	Check:	Daniel	2023-04-11

NingBo KLS ELECTRONIC CO.,L TD.