


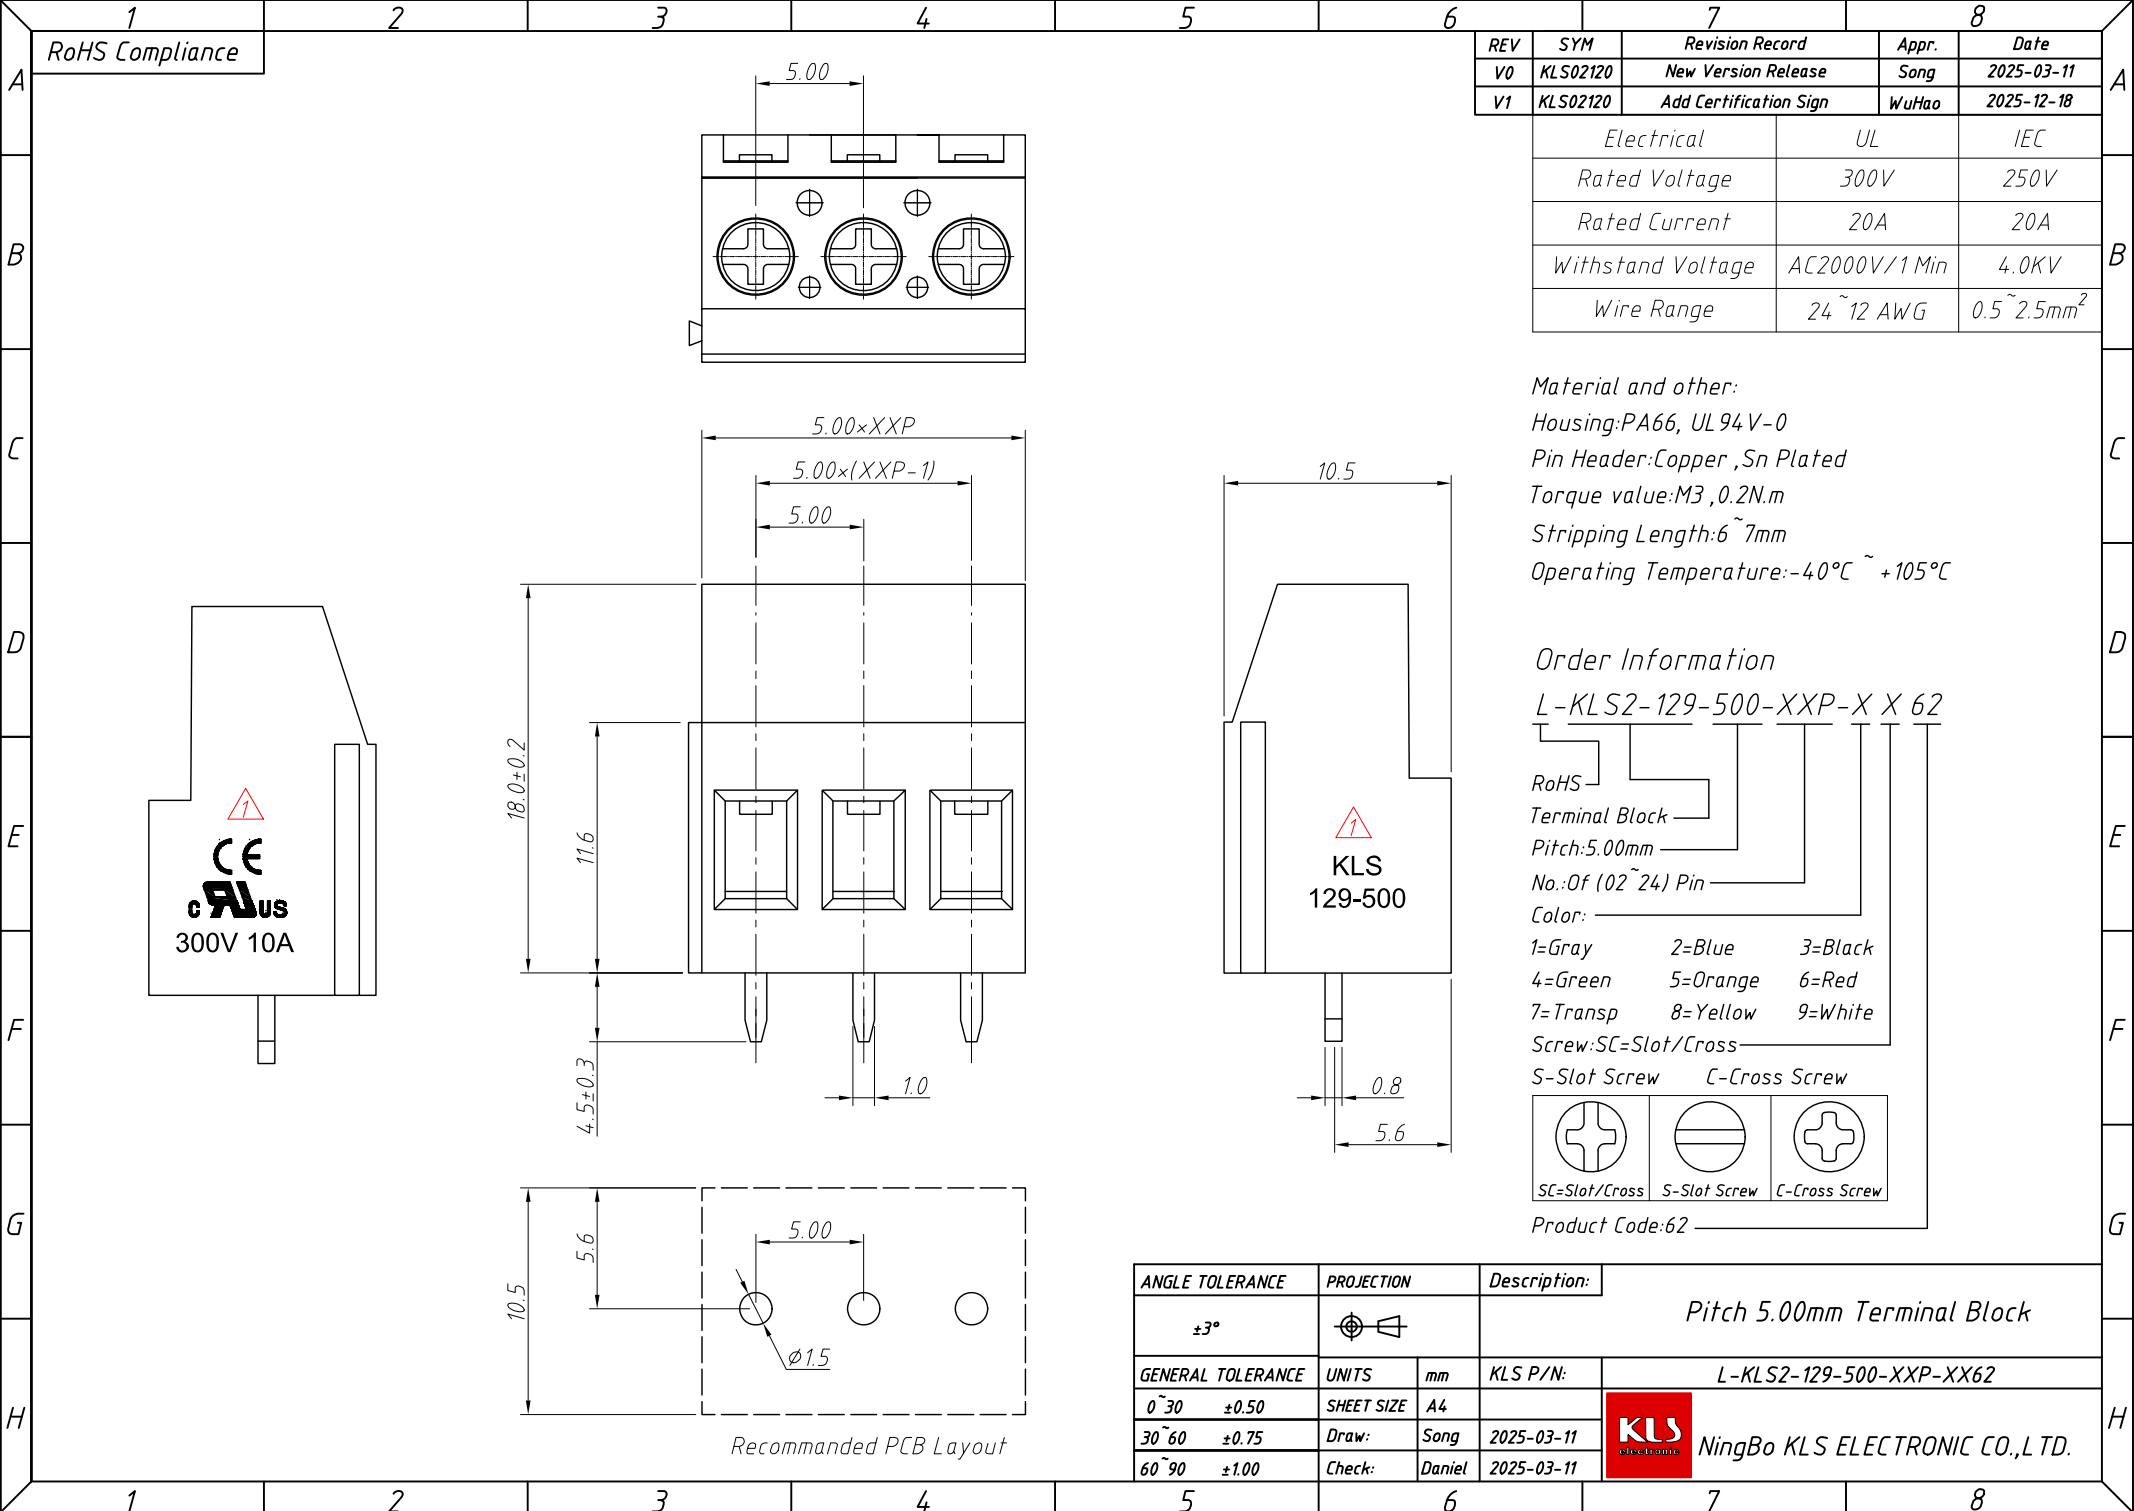

RoHS Compliance

Revision Record		Appr.	Date
REV	SYM		
V0	KLS02120	New Version Release	Song
V1	KLS02120	Add Certification Sign	WuHao
Electrical		UL	IEC
Rated Voltage		300V	250V
Rated Current		20A	20A
Withstand Voltage		AC2000V/1 Min	4.0KV
Wire Range		24~12 AWG	0.5~2.5mm ²

Material and other:
Housing:PA66, UL94V-0
Pin Header:Copper ,Sn Plated
Torque value:M3 ,0.2N.m
Stripping Length:6~7mm
Operating Temperature:-40℃ ~ +105℃


Order Information

L-KLS2-129-500-XXP-X X 62

RoHS
Terminal Block
Pitch:5.00mm
No.:Of (02~24) Pin
Color:

1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw



Product Code:62

ANGLE TOLERANCE		PROJECTION		Description:	
±3°				Pitch 5.00mm Terminal Block	
GENERAL TOLERANCE		UNITS	mm	KLS P/N:	L-KLS2-129-500-XXP-XX62
0~30	±0.50	SHEET SIZE	A4		
30~60	±0.75	Draw:	Song	2025-03-11	
60~90	±1.00	Check:	Daniel	2025-03-11	



NingBo KLS ELECTRONIC CO.,LTD.