




Notes:

- 1.Material: Nylon 66,94V-2 certificated by UL -Heat-resisting,Acid&erosion control,Insulate well and not apt to age.
- 2.Operating temperature:Up to 85°C
- 3.Colour:All colors can be customized
- 4.Technical requirement:Surface smoothly,Hand feel good,No shortage tooth,No shortage material, No air bubble.
- 5.Bundle Diameter:3~130mm
- 6.Loap Tensile Strength:22 KGS Min

| ANGLE TOLERANCE   |            | PROJECTION                                                                            | Description: |                    |
|-------------------|------------|---------------------------------------------------------------------------------------|--------------|--------------------|
| $\pm 3^\circ$     |            |  | Cable Tie    |                    |
| GENERAL TOLERANCE |            | UNITS                                                                                 | mm           | KLS P/N:           |
| .x                | $\pm 0.30$ | SHEET SIZE                                                                            | A4           | L-KLS8-0901-500HDC |
| .xx               | $\pm 0.20$ | Draw:                                                                                 | Song         | 2025-05-22         |
| .xxx              | $\pm 0.10$ | Check:                                                                                | Daniel       | 2025-05-22         |

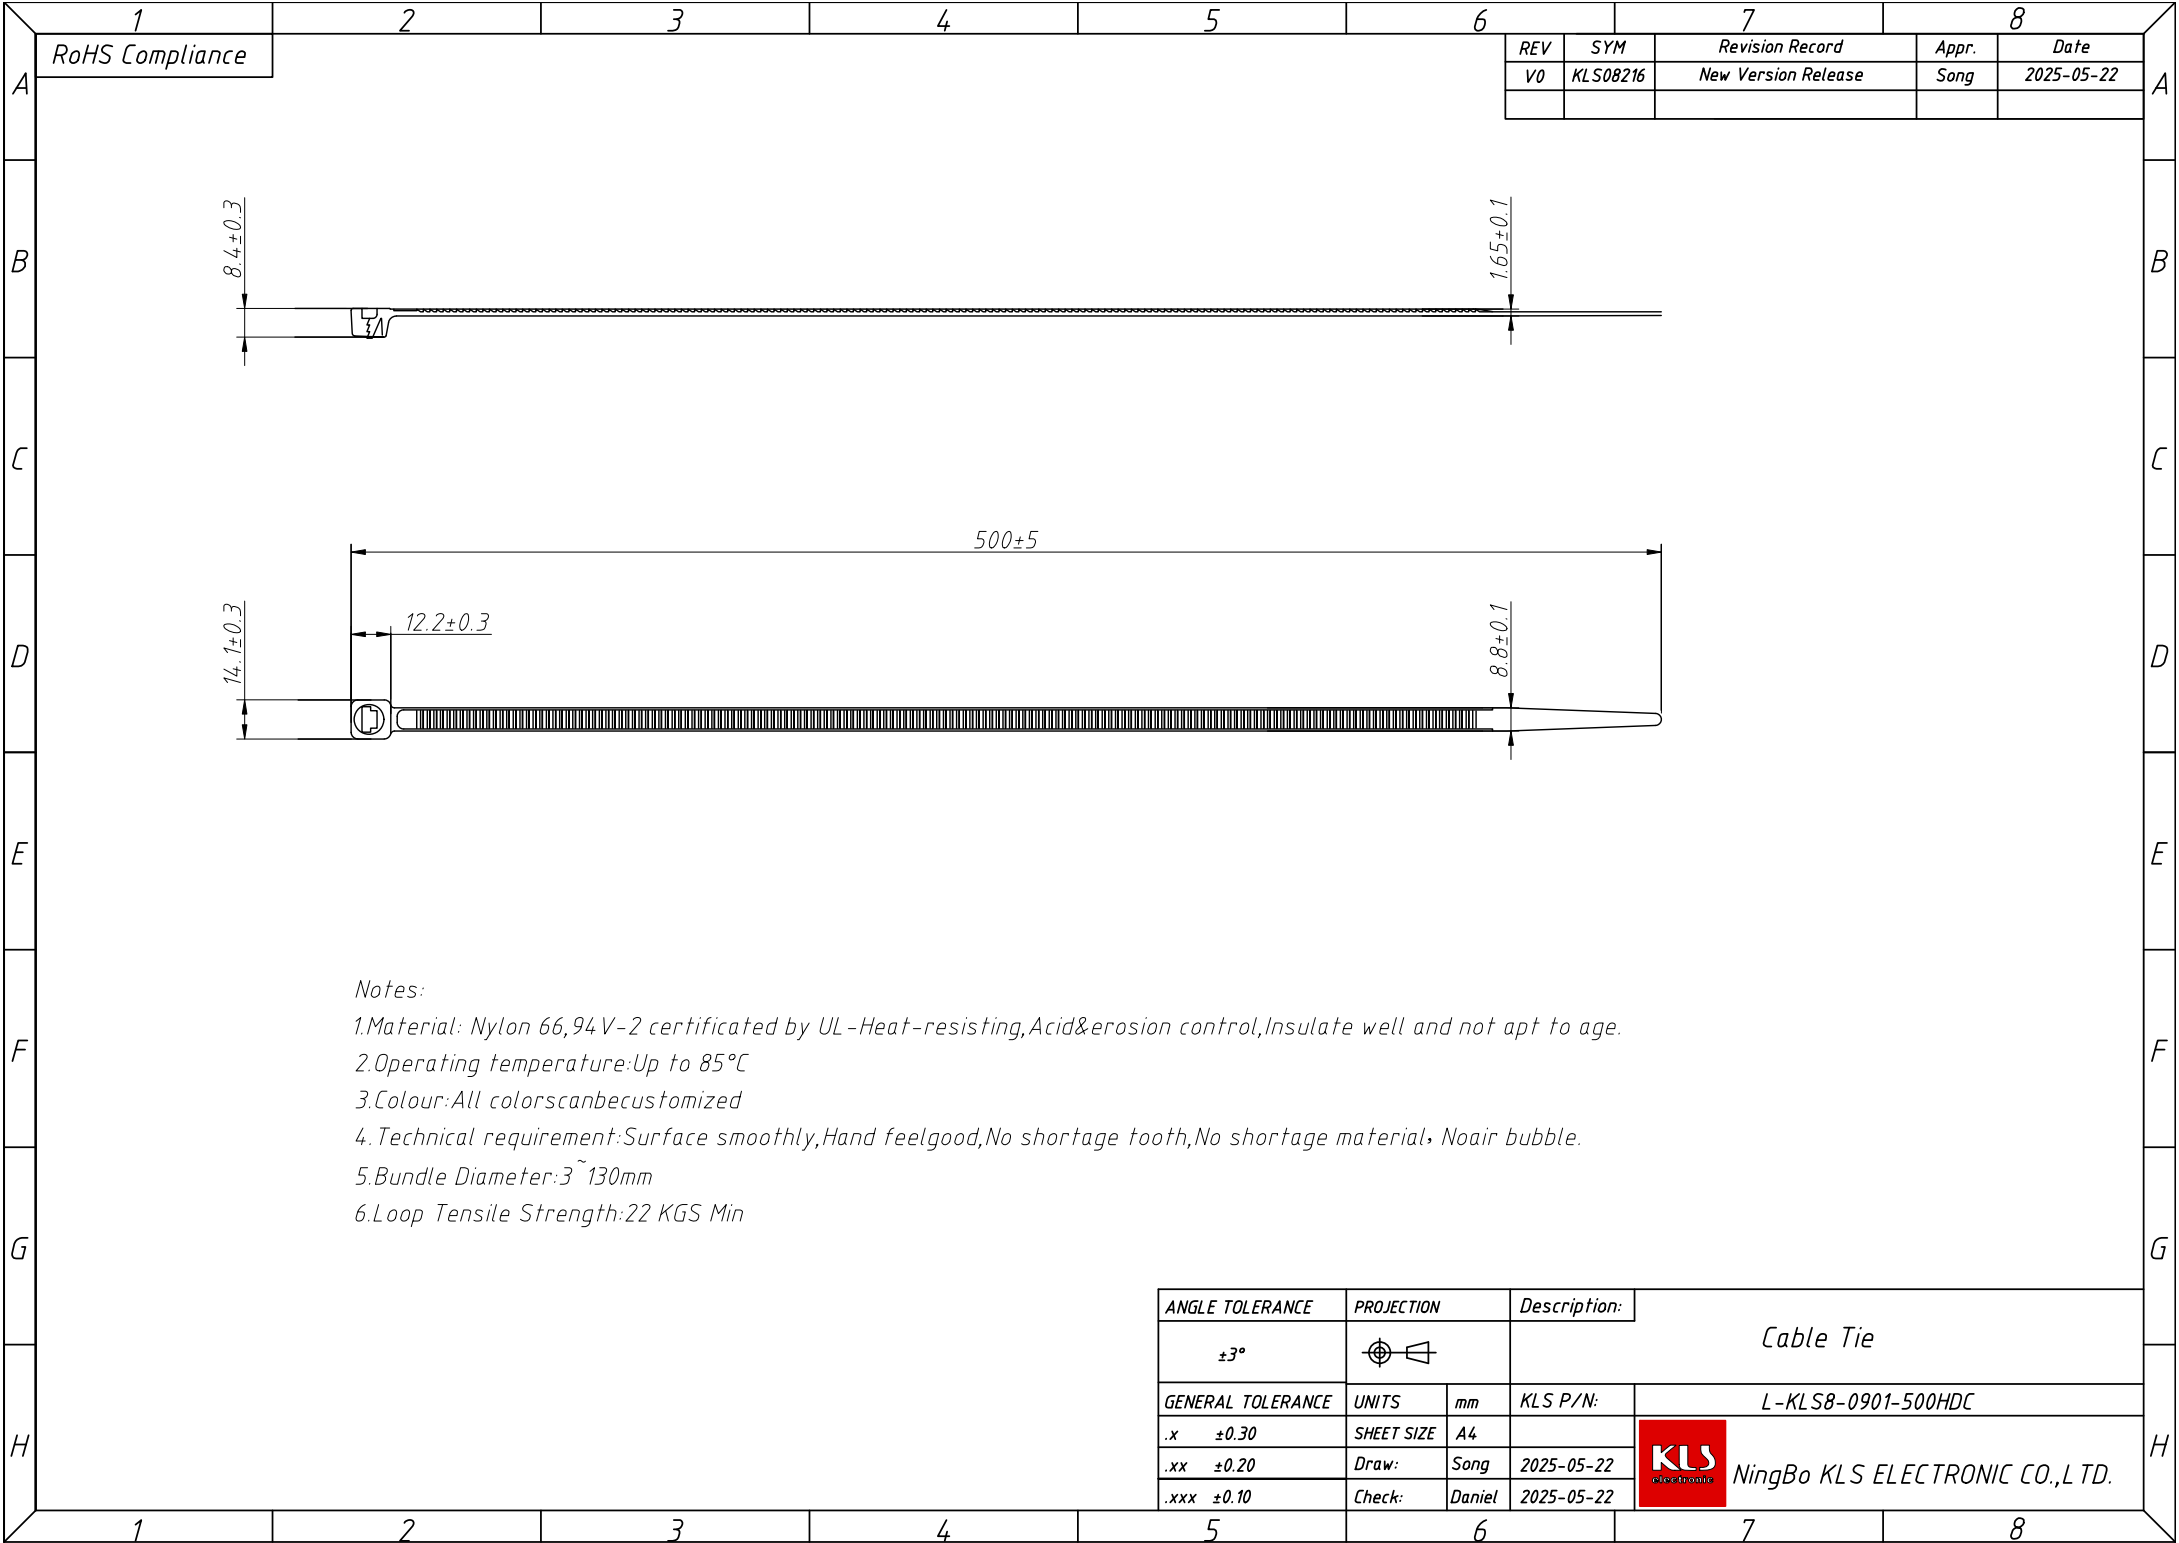

NingBo KLS ELECTRONIC CO.,LTD.