

# ME1A Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Features

- ▶ Rated power: 1W max
- ▶ Input voltage range  $\pm 10\%$
- ▶ Unregulated output
- ▶ High efficiency up to 92%
- ▶ Isolation voltage 1.5KVDC
- ▶ Small no load input current
- ▶ Operating temp. range:  $-40 \sim +105^{\circ}\text{C}$  ambient
- ▶ RoHS compliant
- ▶ Compact SIP4 package
- ▶ Continuous short circuit protection
- ▶ Meet UL/EN/IEC 62368-1 EN 55032 Class B
- ▶ 3 year warranty



RoHS CE cUL US

## Overview

The ME1A series are SIP4 package DC/DC converters with unregulated single output, and 1.5KVDC isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [ $\mu\text{F}$ ] Max.
ME1A-0303	3.3 [2.97~3.63]	3.3	303	82	4000
ME1A-0305		5	200	83	4000
ME1A-0309		9	111	84	2000
ME1A-0312		12	84	85	1000
ME1A-0503 <sup>[1]</sup>	5 [4.5~5.5]	3.3	303	82	4000
ME1A-0505 <sup>[1]</sup>		5	200	87	4000
ME1A-0509 <sup>[1]</sup>		9	111	86	2000
ME1A-0512 <sup>[1]</sup>		12	84	88	1000
ME1A-0515 <sup>[1]</sup>		15	67	88	680
ME1A-0524 <sup>[1]</sup>		24	42	89	560
ME1A-1203	12 [10.8~13.2]	3.3	303	84	4000
ME1A-1205		5	200	88	4000
ME1A-1209		9	111	87	2000
ME1A-1212		12	84	90	1000
ME1A-1215		15	67	88	680
ME1A-1224		24	42	89	560

# ME1A Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Model Numbers

Model Number	Input Voltage [VDC]	Output Voltage [VDC]	Output Current [mA] Max.	Efficiency [%] Typ.	Capacitive Load [uF] Max.
ME1A-1503	15 [13.5~16.5]	3.3	200	85	4000
ME1A-1505		5	200	85	4000
ME1A-1509		9	111	91	2000
ME1A-1512		12	84	89	1000
ME1A-1515		15	67	89	680
ME1A-2403	24 [21.6~26.4]	3.3	303	84	4000
ME1A-2405		5	200	87	4000
ME1A-2409		9	111	92	2000
ME1A-2412		12	84	88	1000
ME1A-2415		15	67	88	680
ME1A-2424		24	42	89	560

Note [1]: Models that are certified to UL62368-1.

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Input current Full load	$V_{IN}=3.3\text{V}$ $V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-	370 230 99 78 50	390 260 105 85 55	mA
Input current No load		-	3	15	mA
Reflected Ripple Current		-	15	-	mA
Surge voltage 1 second max	$V_{IN}=3.3\text{V}$ $V_{IN}=5\text{V}$ $V_{IN}=12\text{V}$ $V_{IN}=15\text{V}$ $V_{IN}=24\text{V}$	-0.7 -0.7 -0.7 -0.7 -0.7	-	5 9 18 21 30	VDC
Output voltage accuracy	All models	Refer to graphic in "Characteristic Curves" section			
Line regulation For $V_{IN}$ change of $\pm 1\%$	$V_{OUT}=3.3\text{V}$ All others	-	-	$\pm 1.5$ $\pm 1.2$	%
Load regulation [2] $I_{OUT}=10\%$ to $100\%$ of $I_{OUT, rated}$	$V_{OUT}=3.3\text{V}$ Others	-	10 8	20 15	%

# ME1A Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit
Temperature coefficient	Full load	-	$\pm 0.03$	-	%/ $^{\circ}\text{C}$
Output ripple and noise	20MHz bandwidth	-	45	100	mVp-p
Output short circuit protection		Continuous, automatic recovery			
Input filter		Capacitor			
Hot plug		None			

Note [2]: Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

## General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage 1 minute, leakage current <1mA	Input to Output	1500	-	-	VDC
Isolation resistance Tested at 500VDC	Input to Output	1000	-	-	M ohm
Isolation capacitance 100KHz, 0.1V	Input to Output	-	20	-	pF
Switching frequency	Full load	-	220	-	KHz
Temperature rise at case	Full load	-	15	-	$^{\circ}\text{C}$
Operating temperature	See "Derating Curve"	-40	-	+105	$^{\circ}\text{C}$
Storage temperature		-55	-	+125	$^{\circ}\text{C}$
Storage humidity	Non-condensing	5	-	95	%RH
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	300	$^{\circ}\text{C}$
Case material		Black plastic UL94-V0			
Cooling method		Free air convection			
Vibration		10-150Hz, 5G, 0.75mm along X, Y and Z			
MTBF	MIL-HDBK-217F	>3,500,000 Hours, $T_A=25^{\circ}\text{C}$			
Safety standards		UL/EN/IEC 62368-1			
EMC standards	CISPR32, EN55032	Class B with "External Circuit"			
ESD	IEC/EN61000-4-2	Contact $\pm 4\text{kV}$ , Air $\pm 8\text{kV}$ , perf. Criteria B			
Size & Weight		11.6x6x10.2mm, 1.2g Typ.			


# ME1A Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters


## Characteristic Curves

### Output vs Ambient Temperature

All models

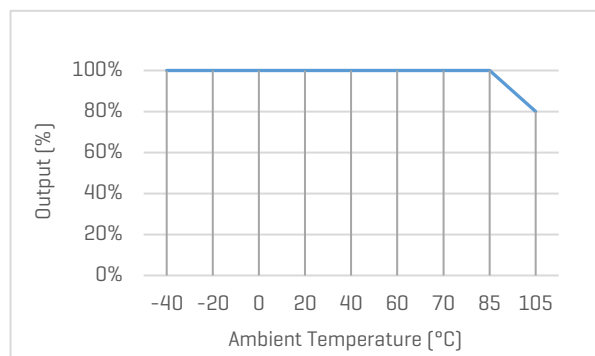


### Output Voltage Accuracy vs Load

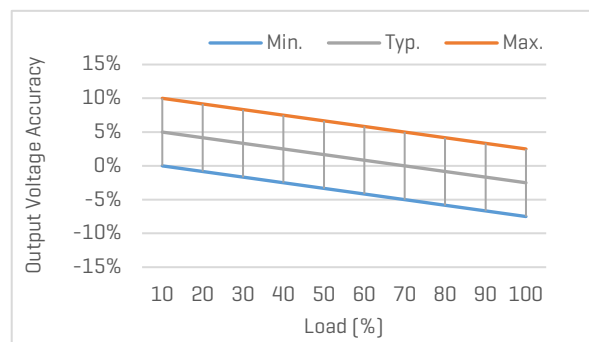


### Efficiency vs Input Voltage

ME1A-0505, with full Load

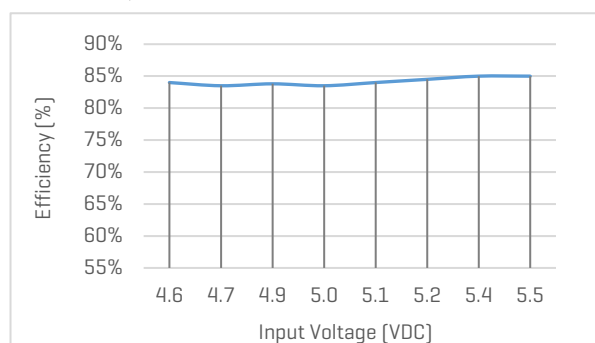


### Efficiency vs Load

ME1A-0505, with nominal input voltage

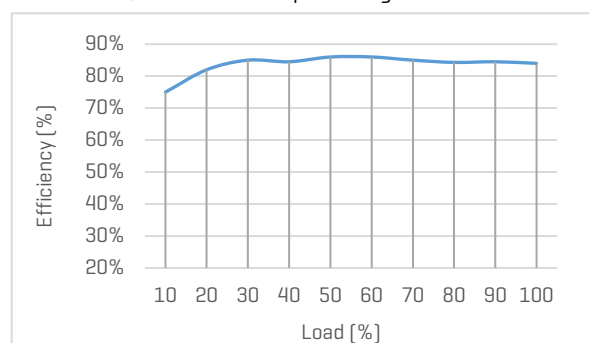


### Efficiency vs Input Voltage

ME1A-1205, with full Load

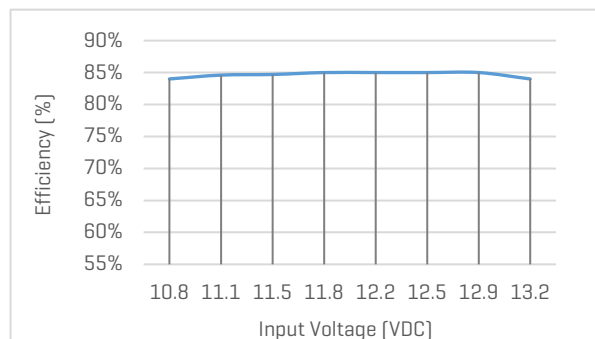

### Efficiency vs Load

ME1A-1205, with nominal input voltage

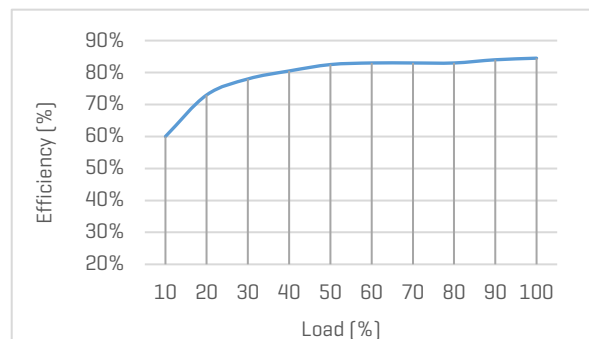

# ME1A Series

1W, Unregulated, 1.5KV Isolation, DC/DC Converters

## Recommended External Circuit

### Typical Application Circuit

\*Typical application circuit is to further lower the input and output ripple. It is not mandatory.

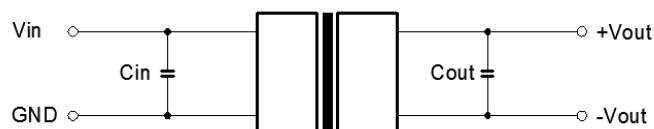


Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	3.3, 5V	12V	15V	24V
C <sub>IN</sub>	4.7uF, 16V	2.2uF, 25V	2.2uF, 25V	1uF, 50V

[Table 2] Recommended component spec

Output voltage	3.3, 5V	9V	12V	15V	24V
C <sub>OUT</sub>	10uF, 16V	4.7uF, 16V	2.2uF, 25V	1uF, 25V	0.47uF, 50V

### EMC Enhancement for EN55032 Class B

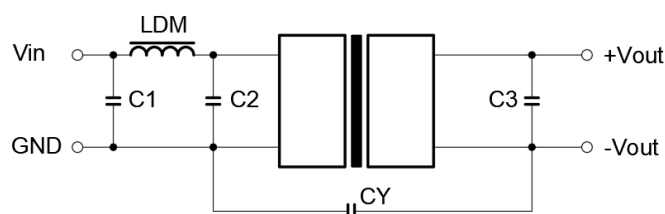





Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec

Component	LDM	C1, C2	CY
C <sub>OUT</sub>	6.8uH	4.7uF, 50V	1nF, 2KV

\*"C3" refer to C<sub>OUT</sub> in [Table 2]

## Mechanical Specifications

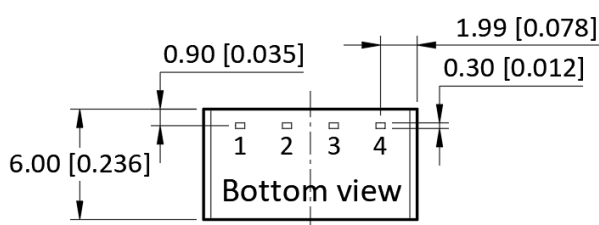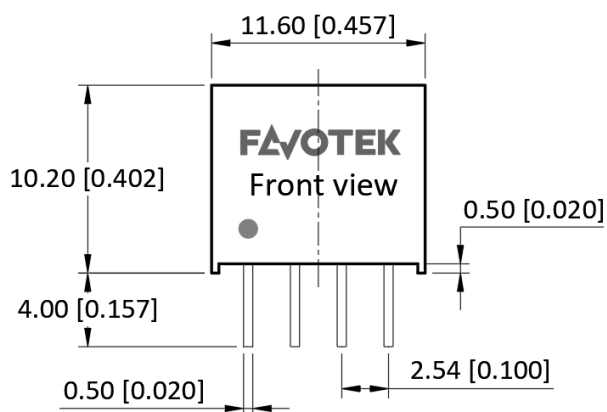

### Pin Definition

Pin #	Single Out
1	-V <sub>IN</sub>
2	+V <sub>IN</sub>
3	-V <sub>OUT</sub>
4	+V <sub>OUT</sub>

\* Unless otherwise specified unit: mm [inch]

\* General tolerance:  $\pm 0.50 [\pm 0.020]$

\* Pin thickness:  $\pm 0.10 [\pm 0.004]$

\* Footprint grid 2.54 x 2.54 mm