


选型说明 How to order



Housing:	Bakelite	Lever:	Brass with Nickel plated
Terminal:	Brass with silver plated	Torque:	Max. 5kg-cm (70 ounce-inch)
Rating:	6A 125VAC/3A 250VAC	Contact Resistance:	50mΩ max
Electrical Life:	≥ 10,000 Cycles	Mechanical Life:	≥ 100,000 Cycles
Dielectric strength:	1500VAC 1 minute	Operating Temperature:	-25°C~+85°C
Insulation Resistance:	1000mΩ min (500VDC)	OEM or ODM:	Available

外型图 (Outline Drawing)

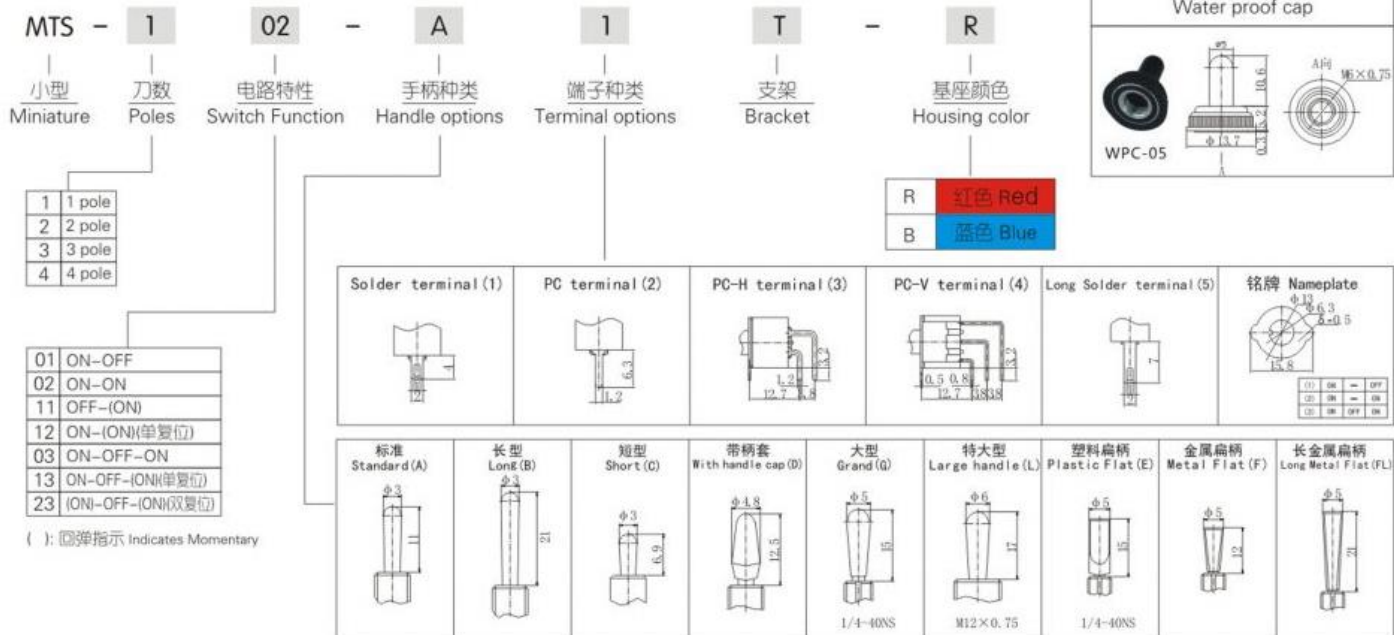