

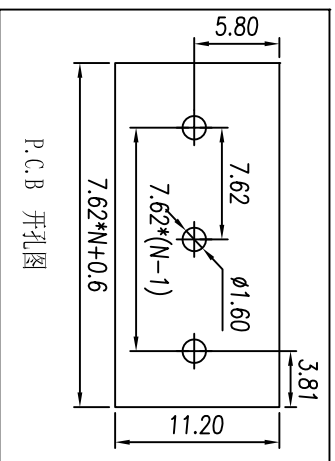


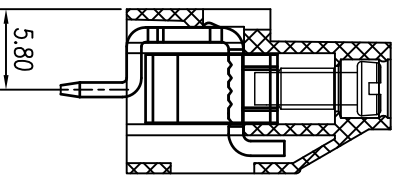

# 宁波新三和连接电气有限公司

## NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书  
THE SPEC SHEET

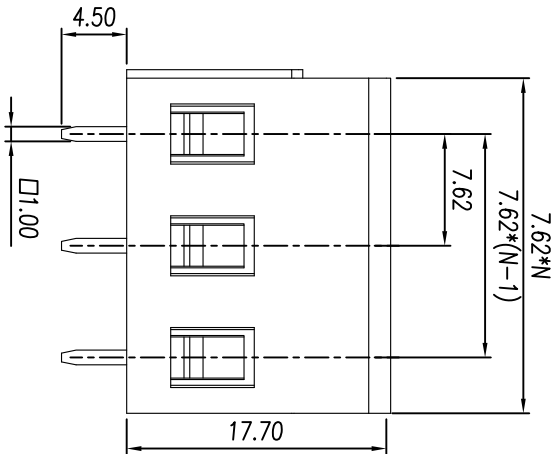


### Standard UL

Rated voltage	300V
Rated current	9A
Contact resistance	20mΩ
Insulation resistance	500MΩ / DC500V
With standing voltage	AC 2000V/1 Min
Wire range	22-14AWG

### Standard IEC

Rated voltage	320V
Rated current	15A
Wire range	2.5mm <sup>2</sup>

Temp. Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Torque	0.5Nm
Steip Length	6-7mm
Pitch	7.62mm
Poles	2p,3p

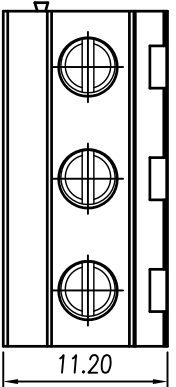

### linear dimension

variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称	SH143-7.62		
图纸比例	2:1	A4	视图
Project View	中国宁波新三和		
Product Name	NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.		
Drawings Scale	TEL:8657463272690 FAX:8657463272690		

中国宁波新三和  
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.  
TEL:8657463272690  
FAX:8657463272690