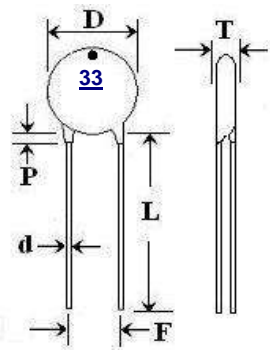


## SPECIFICATION FOR APPROVAL

<b>CERAMIC DISC CAPACITORS</b>								
Customer :								
Capacitance : <b>33 pF</b>	Tolerance : <b>±5%</b>	Issue No.						
Temp. Coef. <b>NPO</b>	Q'ty of Sample :            pcs	Issue Day. <b>21/04/2026</b>						
Cust. P/N :	Part No. <b>TN100330J-L515B</b>	W V <b>100</b> VDC						
Diagram of Dimensions : (Unit: mm)								
			<p>D: <u>5.5 max.</u></p> <p>T: <u>2.5 max.</u></p> <p>F: <u>5.08 ±0.8</u></p> <p>L: <u>25.0 min.</u></p> <p>d: <u>0.5Ø ±0.05</u></p> <p>P: <u>2.0 max.</u></p>					
<b>SPECIFICATION</b>				Initial Test				
				No	pF	Q Value	I.R.	T.V.
<b>Frequency = 1M Hz    Temperature = 25°C</b>				1.				
1.	Q Value : <b>1000</b> Min.			2.				
2.	Insulation Resistance : <b>10,000</b> MΩ Min.			3.				
3.	Dielectric Strength Test : DC <b>250</b> V			4.				
4.	Case Insulation Test : DC <b>100</b> V			5.				
5.	Temperature Coefficient : <b>0 ± 60 ppm/°C</b>			6.				
6.	Lead Pull Test : <b>1.0</b> Kg 5 Seconds.			7.				
7.	For further details please visit the following link of our website:			8.				
	<a href="#">CLASS-I_20230118.pdf</a>			9.				
				10.				
<b>APPROVED BY CUSTOMER</b>				<b>REMARK :</b>				
Your Confirmation : <input type="checkbox"/> Approval <input type="checkbox"/> Conditional Approval <input type="checkbox"/> Rejection (Please send a copy for our ref.)				Spec. Applied by EIA RS198 Test Instruments : (1). Capacitance : (a).CHEN HWA 1062 L.C.R.METER (1Khz). (b).ESI410 OR HP 4277 L.C.R.METER(1Mhz). (2). Dissipation Factor : as the Item (1). (3). Insulation Resistance : GENERAL RADIO 1864 MEGOHM METER. (4).Dielectric Strength : PHIHON PUNCTURE TESTER				
Inspected by		Checked by	游弘明	Approved by	蘇彥華			