

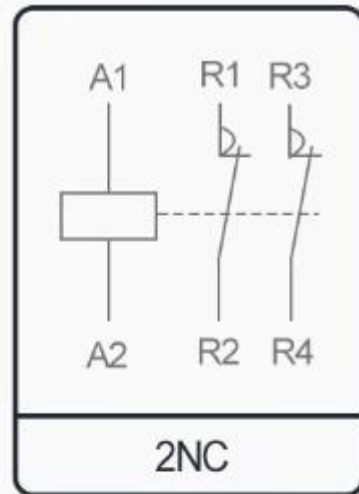


Contactor model	TOCT1-16 2NO	TOCT1-20 2NO	TOCT1-25 2NO
Rated isolating voltage (Ui) V	500	500	500
Rated operating voltage (Ue) V	230	230	230
Thermal continuous current(Ith)A	16	20	25
Rated working current (Ie) AC-7a A	16	20	25
AC-7b A	9	9	10
Rated working power (Pe)AC-7a kW	4	4	5.4
AC-7b A kW	1.2	1.2	1.4
Operating times 10 thousand	≥3		
Operating frequency AC-7a turns/Hour	1200		
AC-7b turns/Hour	30		
Connect and break capability AC-7a A	1.5Ie		
AC-7b A	8Ie		
Withstand current (IcW)10S A	8/Ie AC-7b		
Connecting wiring 1 wire mm ²	1-2.5	1-2.5	1-4
2 wire mm ²	1-2.5	1-2.5	1-4
Control power voltage(Us)AC V	220/230		
Coil power W	1.4		

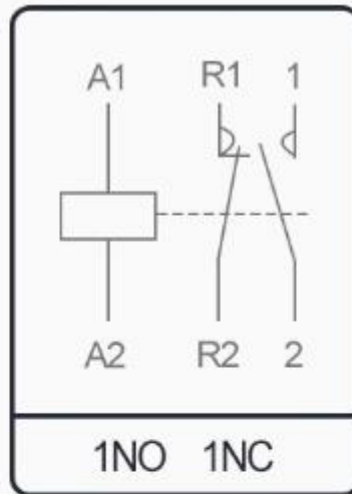

NEW DESIGN

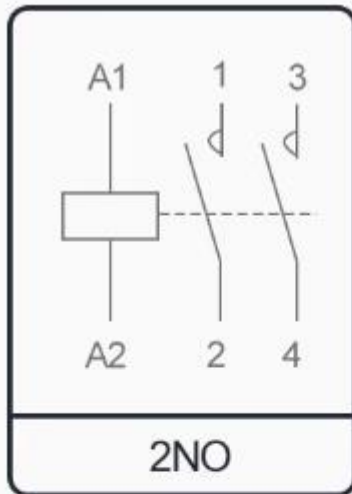

Space
optimization



Installation
standard



Segment
indication



Energy consumption
reduction



Quality
Assurance



Flame retardant
material

