



W005 THRU W10

SINGLE PHASE 1.0 AMPS. SILICON BRIDGE RECTIFIERS


Voltage Range
50 to 1000 Volts
Current
1.0 Amperes

FEATURES

- UL Recognized File # E-230084
- Surge overload ratings to 40 amperes peak
- Ideal for printed circuit board
Reliable low cost construction technique results in inexpensive product
- High temperature soldering guaranteed:
250°C / 10 seconds / 0.375"(9.5mm)
lead length at 5 lbs.,(2.3Kg) tension

Mechanical Data

- Case:Molded plastic
- Lead:Solder plated
- Polarity:As marked
- Weight:1.10 grams

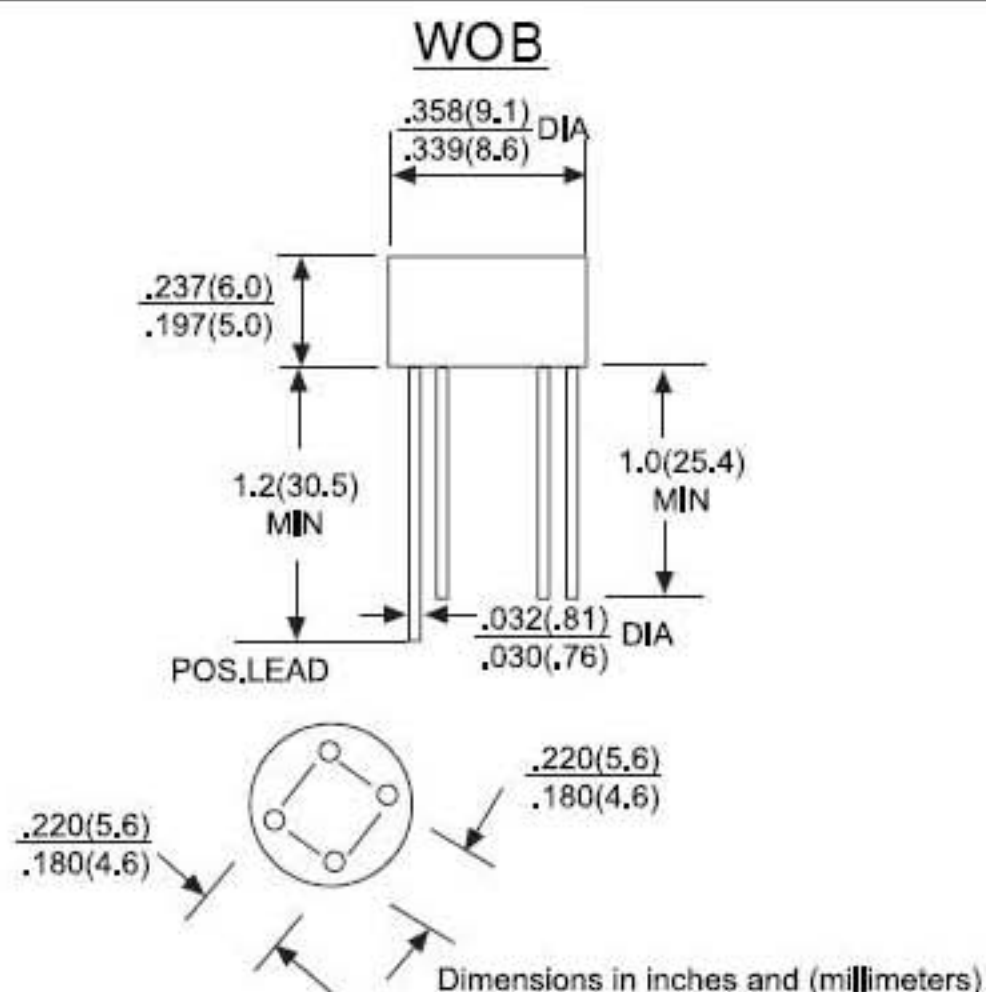

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified,
Single phase, half wave, 60Hz, resistive or inductive load,
For capacitive load, derate current by 20%

Type Number		W005	W01	W02	W04	W06	W08	W10	UNITS
Maximum Repetitive Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA = 50°C	IF(AV)	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	IFSM	40							A
Maximum Instantaneous Forward Voltage Drop Per Leg@1.0A	VF	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	10 500							uA uA
Operating Temperature Range	TJ	-55 to+125							°C
Storage Temperature Range	TSTG	-55 to+150							°C

RATING AND CHARACTERISTIC CURVES W005 THRU W10

