




Dimension(mm)	ϕD	L1	ϕd	$\phi d1$	D	I	L2	b	B	ϕ
WS16	22	43.5	10	15.6	M18×1	9.5	21.5	20	26	3.3

Dimension(mm)	ϕD	L1	ϕd	$\phi d1$	D	I	L2	b	B	ϕ
WS16	22	43.5	10	15.6	M18×1	9.5	21.5	20	26	3.3

2PIN 3PIN 4PIN 5PIN 6PIN 7PIN 8PIN 9PIN 10PIN

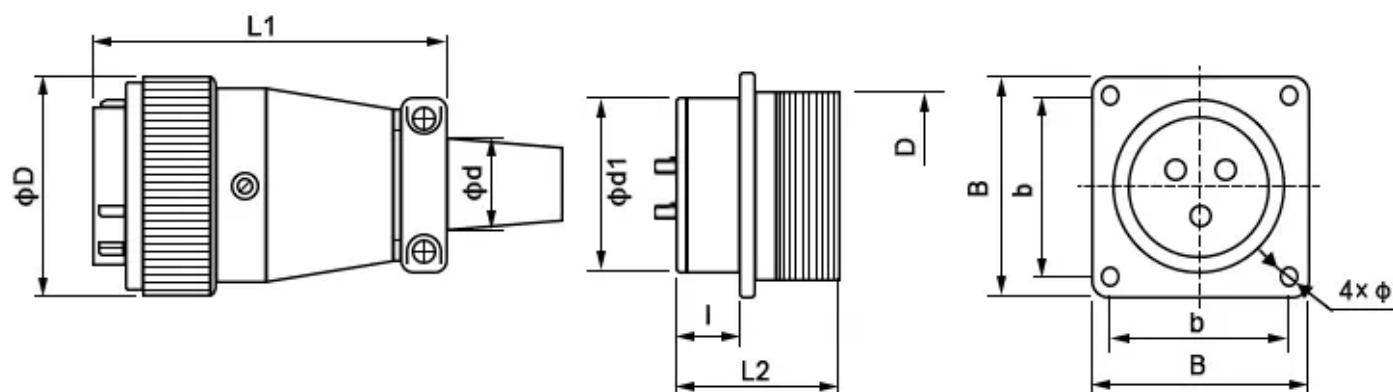

2PIN 3PIN 4PIN 5PIN 6PIN 7PIN 8PIN 9PIN 10PIN



Solder contact spec

WS16	2	3	4	5	6	7	8	9	10
Male contact face view									
Rated current(A)	10	10	5	5	5	5	5	5	5
Contact diameter(mm)	1.5×2	1.5×3	1×4	1×5	1×6	1×7	1×8	1×9	1×10
Rated voltage(AC.V)	500	500	500	500	500	400	400	400	400
Test voltage(AC.V)1min	1500	1500	1500	1500	1500	1200	1200	1200	1200
Contact resistance(mΩ)	2.5	2.5	5	5	5	5	5	5	5
Insulation resistance(MΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000
Wire size(mm ² /AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18



