
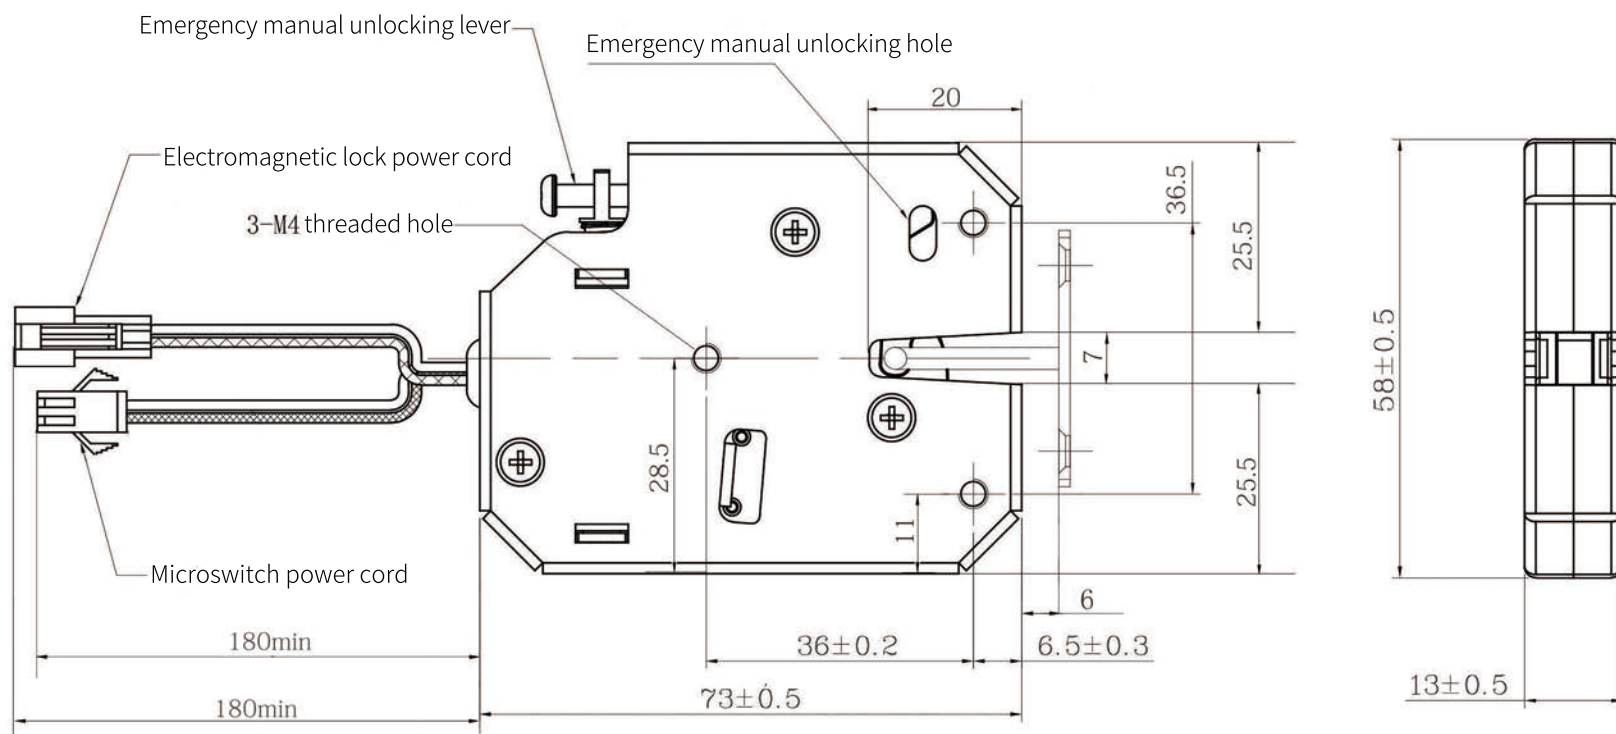


Voltage	DC5V
resistance	3.33Ω ±10% at20℃
electric current	1.5A
power	7.5 W
Dielectric Strength	600VAC/1Sec
Insulation impedance	500VDC/100MΩ
Energization rate	15% (The longest power on time is 8 seconds)
Insulation class	Grade B (130℃)
Usage environment	-20℃~+40℃, Relative humidity 5~90%



RECOGNITION	DESIGNER	CONFIRMOR	VERSION	CHANGE CONTENT	CHANGE PERSON	DATE	The materials and surface treatments used in this product are in compliance with ROHS specifications		General tolerance	LESS THAN 60	±0.1	PROPORTION	 THIRD PERSPECTIVE		
								6~30		±0.2	1:1	MODEL		XG-07C	
								30~60		±0.3	UNIT				
								GREATER THAN 60		±0.4	mm				
								THICKNESS		Ra3.2	R ANGLE		Appearance size chart		
								CONCENTRICITY		±0.1	0.1				
								FLATNESS	±0.1	CHAMFER					
												VERTICALITY	±0.1	0.1*45°	
								SARY							