
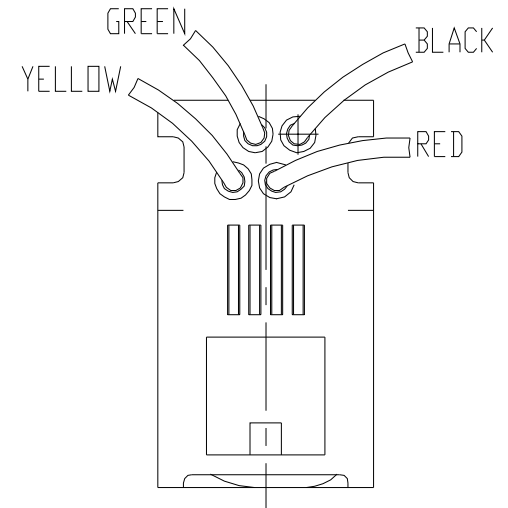


YH-113

REV.	ECN NO.	DATE

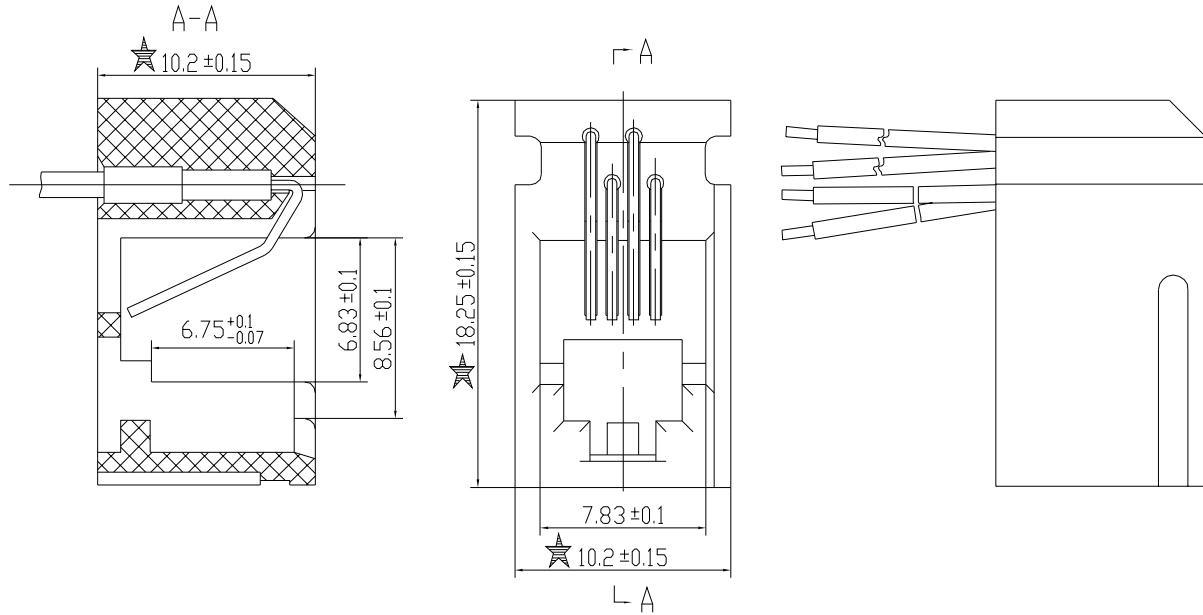

- NOTES:
- ELECTRICAL:
    - VOLTAGE RATING: 125 VAC RMS;
    - CURRENT RATING: 1.5 AMP;
    - CONTACT RESISTANCE: 20 MILLIOHMS Max;
    - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
    - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
  - MECHANICAL:
    - HOUSING: ABS. UL94V-0. GRAY;
    - PIN: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au;
    - TERMINALS: H65Y;
    - WIRE: UL 1061 AWG26. JACKET: PVC. COLOR: GREEN BLACK YELLOW RED;
    - DURABILITY: 750 CYCLES Min.
3. \*Critical Dimension.

RoHS Compliant

<b>意华通讯连接器有限公司</b> YIHUA COMMUNICATED CONNECTOR CO.,LTD.		TOLERANCES 0~15±0.15, 15~30±0.2, 30~±0.25 ANGLE ±1°.		MATERIAL: SEE NOTE FINISH: SEE NOTE SHEET 1 OF 1		Designed: Checked: Approved:		NAME: 616L 4P4C DWG NO.: Q07082103 PART NO.: B206N-4403-I004		REV 00
FIRST ANGLE PROJECTION	SCALE 3:1	UNIT mm	CUSTOMER:	MODEL NO.:						