
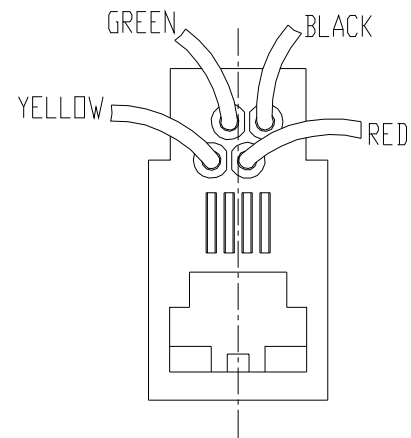
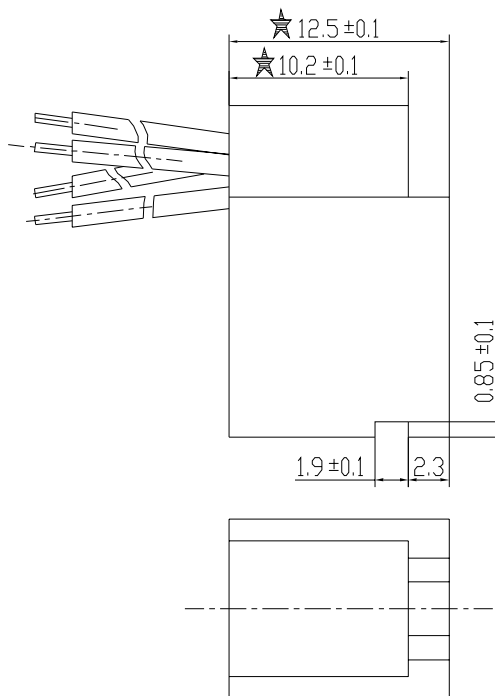


YH-116

REV.	ECN NO.	DATE

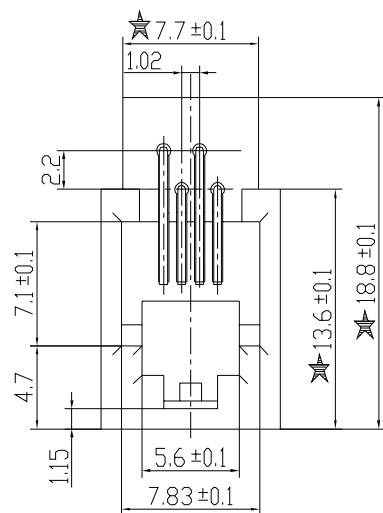

- NOTES:
- ELECTRICAL:
 - VOLTAGE RATING: 125 VAC RMS;
 - CURRENT RATING: 1.5 AMP;
 - CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - MECHANICAL:
 - HOUSING: ABS, UL94V-0, GRAY;
 - PIN: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au;
 - TERMINALS: H65Y;
 - WIRE: UL 1061 AWG26, JACKET: PVC, COLOR: GREEN BLACK YELLOW RED;
 - DURABILITY: 750 CYCLES Min.
3. *★ Critical Dimension.

RoHS Compliant

意华通讯连接器有限公司 YIHUA COMMUNICATED CONNECTOR CO.,LTD.	TOLERANCES		MATERIAL: SEE NOTE	Designed:	NAME: 616Y 4P4C	
	0~15±0.15, 15~30±0.2, 30~±0.25		FINISH: SEE NOTE	Checked:	DWG NO.: Q07081805	REV
FIRST ANGLE PROJECTION	SIZE 4	SCALE 2.5:1	UNIT mm	CUSTOMER:	SHEET 1 OF 1	Approved:
			MODEL NO.:		PART NO.: B213N-4403-I002	00