
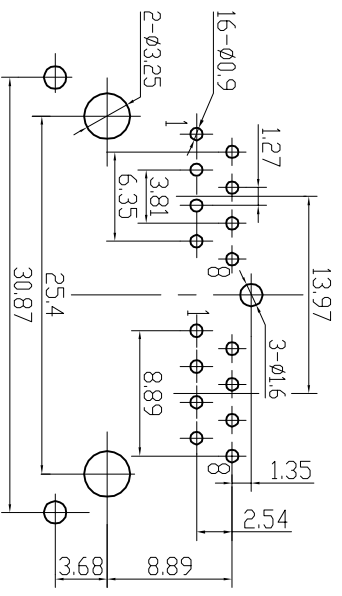
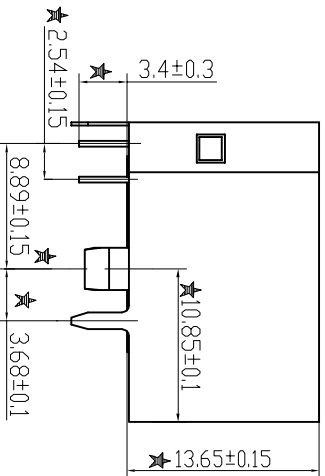
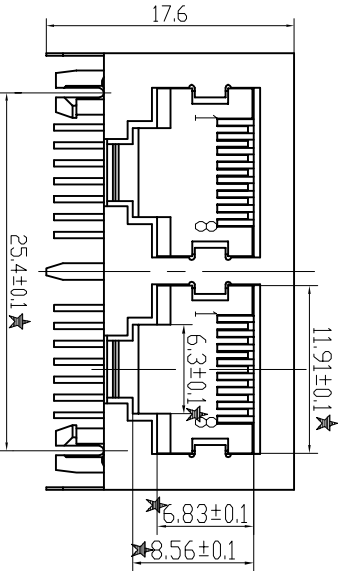


YH-59-02-02

REV.	ECN NO.	DATE

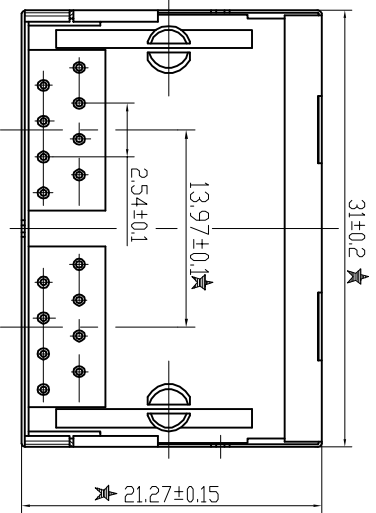

PCB LAYOUT

- NOTE:
- 1 ELECTRICAL:
 - 11 VOLTAGE RATING: 125 VAC RMS;
 - 12 CURRENT RATING: 15 AMP;
 - 13 CONTACT RESISTANCE: 20 MILLIOHMS Max;
 - 14 INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
 - 15 DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
 - 2 MECHANICAL:
 - 21 HOUSING: PBT, UL94V-0, BLACK;
 - 22 INSERT/PBT, UL94V-0, BLACK;
 - 23 TERMINALS: DIA 0.46 PHOSPHOR BRONZE PLATED 30" Au;
 - 24 SHIELD/65Y;
 - 25 DURABILITY: 750 CYCLES Min.
- 3★Critical dimension.

ROHS Compliant

CZT®

惠华通讯插件有限公司
YIHUA COMMUNICATED CONNECTOR CO., LTD.

TOLERANCES
0-15±0.15,
15-30±0.2,
30-40±0.25
ANGLE:H°

MATERIAL: SEE NOTE

Designed:

NAME: 5921-S 8P 2ports(02)

FINISH: SEE NOTE

Checked:

DWG NO.: C07082801



SCALE: 4

UNIT: mm

CUSTOMER: MODEL NO.:

SHEET 1 OF 1

Approved:

PART NO.: B591S2-8803-M009

REV 00