
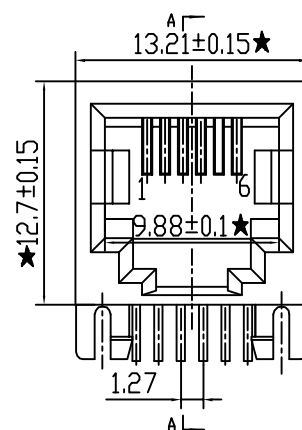


YH-59-21

REV.	ECN NO.	DATE

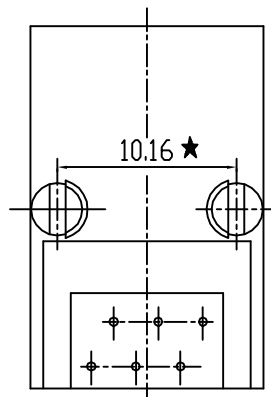

NOTE:



1. ELECTRICAL:

- 1.1 VOLTAGE RATING: 125 VAC RMS;
- 1.2 CURRENT RATING: 1.5 AMP;
- 1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;
- 1.4 INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
- 1.5 DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;

2. MECHANICAL:

- 2.1 HOUSING: PBT, UL94V-0, BLACK;
- 2.2 INSERT: PBT, UL94V-0, BLACK;
- 2.3 TERMINALS: DIA 0.46 PHOSPHOR BRONZE PLATED 3u" Au;
- 2.4 DURABILITY: 750 CYCLES Min.

3.★Critical dimension.

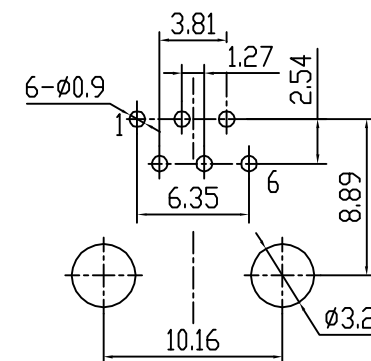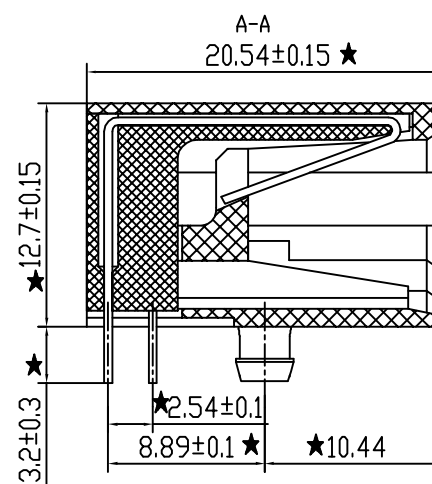

PCB LAYOUT

RoHS Compliant

CZT® 意华通讯接插件有限公司 YIHUA COMMUNICATED CONNECTOR CO.,LTD.					TOLERANCES 0~15±0.15, 15~30±0.2, 30~±0.25 ANGLE±1°.	MATERIAL: SEE NOTE		Designed:		NAME: 59-6P6C (AJ-007)			
 FIRST ANGLE PROJECTION	A4 SIZE	SCALE	UNIT	CUSTOMER:		FINISH: SEE NOTE		Checked:		DWG NO: C07082902		REV	
		2.5:1	mm	MODEL NO.:		SHEET 1 OF 1		Approved:		PART NO: B591N-6603-M003		00	