
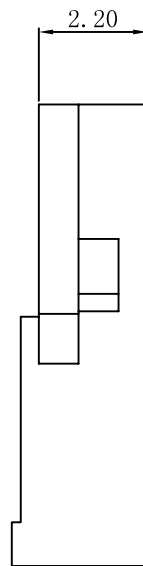
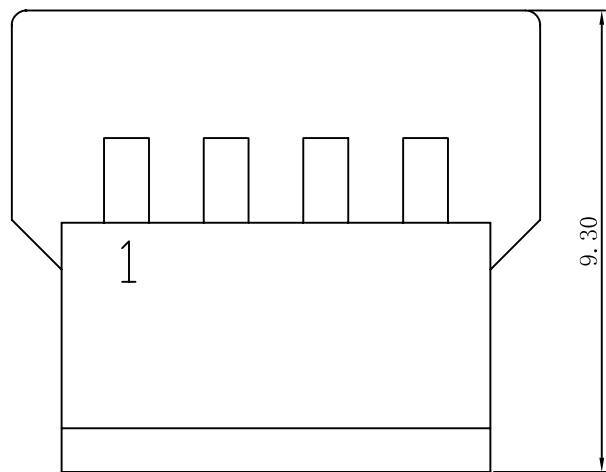


RoHS

REVISION DATE

ITEM	DESCRIPTION	DATE
A	Issue	

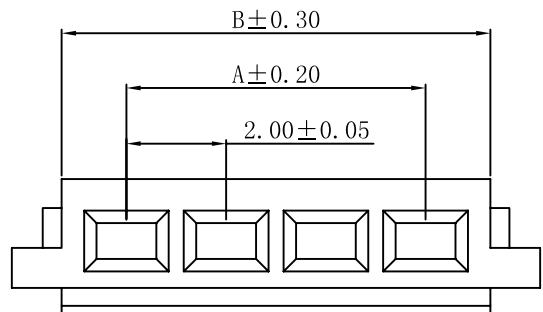


■ SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

■ HOUSING

- Material: PBT UL 94V-0
- Color: White

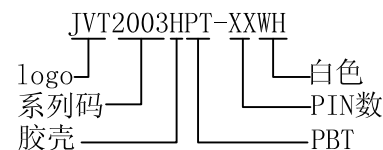

Poles	Dimensions (mm)	
	A	B
2	2.00	4.6
3	4.00	6.6
4	6.00	8.6
5	8.00	10.6
6	10.00	12.6
7	12.00	14.6
8	14.00	16.6
9	16.00	18.6
10	18.00	20.6
11	20.00	22.6
12	22.00	24.6
13	24.00	26.6
14	26.00	28.6

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ± 0.40
比例 (SCALE)	FIT	0.0 ± 0.30
版本 (EDITION)	A.0	0.00 ± 0.20
日期 (DATE)	2013 05 17	0.000 ± 0.05

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品 号 (PART NO)	JVT2003HPT-XXWH	页 次 (PAGE)	
审核 (CHECKED)	CHEN	图 号 (DRAW NO)	050-2003-01		1/1
核准 (APPROVE)		品 名 (NAME)	MLX51005 2.0mm 公HSG		