


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	



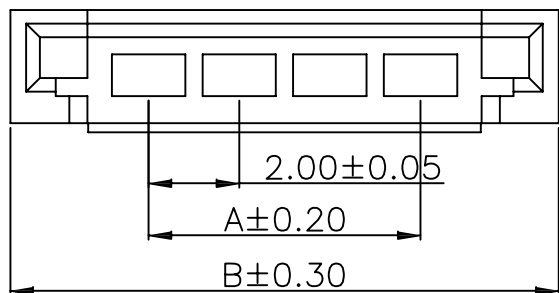


SPECIFICATION

- Voltage rating: 250V AC, DC
- Current Rating: 3A, AC, DC
- Withstand voltage: 1000V AC/minute
- Contact resistance: 10mΩ max
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C

HOUSING

- Material: PBT UL 94V-0
- Color: White/Black

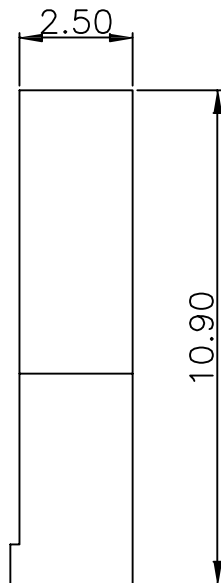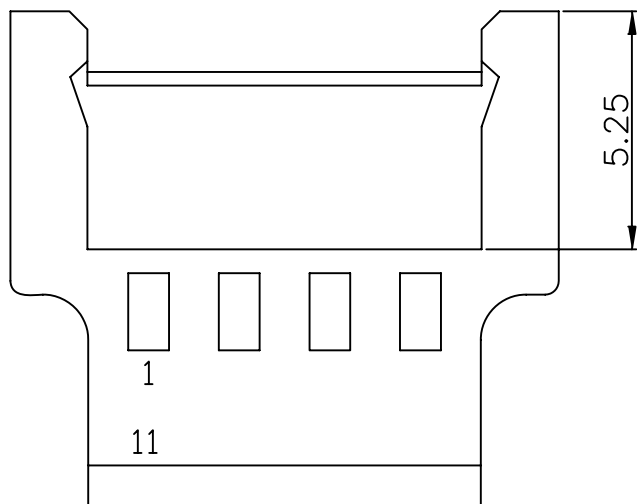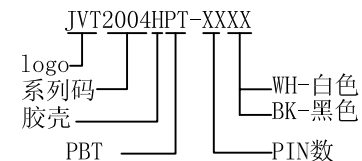

Poles	Dimensions (mm)	
	A	B
2	2.00	8.10
3	4.00	10.10
4	6.00	12.10
5	8.00	14.10
6	10.00	16.10
7	12.00	18.10
8	14.00	20.10
9	16.00	22.10
10	18.00	24.10
11	20.00	26.10
12	22.00	28.00
13	24.00	30.10
14	26.00	32.10

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.40
比例 (SCALE)	FIT	0.0 ±0.30
版本 (EDITION)	A.0	0.00 ±0.20
日期 (DATE)	2013 05 17	0.000 ±0.05

东莞市乔业电子有限公司
 DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品号 (PART NO)	JVT2004HPT-XXXX	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	050-2004-01	1/1	
核准 (APPROVE)		品名 (NAME)	MLX51006 2.0mm 母HSG		