

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
00-2		去掉小拼接柱及盖板对应孔	WWF	05/26/15

备注一:

- UL 标准
 1. 额定电压与电流: 300V / 66A
 2. 工频耐压: AC1600V/1Min.
 3. 线径范围: 24~4AWG

IEC 标准

污染等级	2	2	3
过压类别	II	III	III
额定脉冲电压(KV)	4.0KV	4.0KV	4.0KV
额定电压(V)	630V	320V	320V
额定电流(A)	76A		

2. 线径范围: 0.2~16mm²







备注二:

1. 尺寸标注符合标准 ASME Y14.5-2009
 2. P距: 10.0mm, P数范围: N=01~16P
 3. 剥线长度: 12~13mm
 4. 使用温度范围: -40°C~+105°C
 5. "X" 为重点管控尺寸

6. 未注公差表:

P距方向公差(mm)	其他尺寸公差(mm)				- / 0 / +
	≤6	6 ~ 10	10 ~ 24	≤30	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50
±1.00	±1.00	±1.00	±1.00	±1.00	±1'

7. 须符合RoHS环保要求

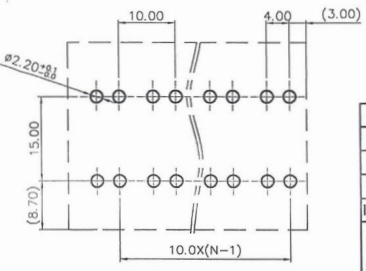

生产专用
 有效期 2016.5.28 - 2016.8.28
 (内部文件, 对外无效)

4	DG264-00A盖板	3208CYY01A(H)	1	PA66	UL94 V-C
3	DG270-10.0-00A弹片	X000006200(H)	XX	不锈钢	
2	DG264-00A焊脚	3208B00010(H)	XX	紫铜	镀锡
1	DG264-10.0-00A塑件	3208AYY01A(H)	XX	PA66	UL94 V-C

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
PART NO.: /		NINGBO DEGSON ELECTRICAL CO., LTD			
APPD: <i>Amey 5/21/15</i>		NAME: DG264-10.0-XXP-1Y-00A(H)			
CHKD: <i>Denny 5/21/15</i>		TITLE: ASSEMBLY DRAWING			
DRFT: WWF 07/07/15		DRAWING NO.: DG264-10.0-E01		REV	T0-2
THIRD ANGLE PROJECTION		MM (INCH)		SHEET	1/1
		DO NOT SCALE DRAWING		SCALE	1:1