


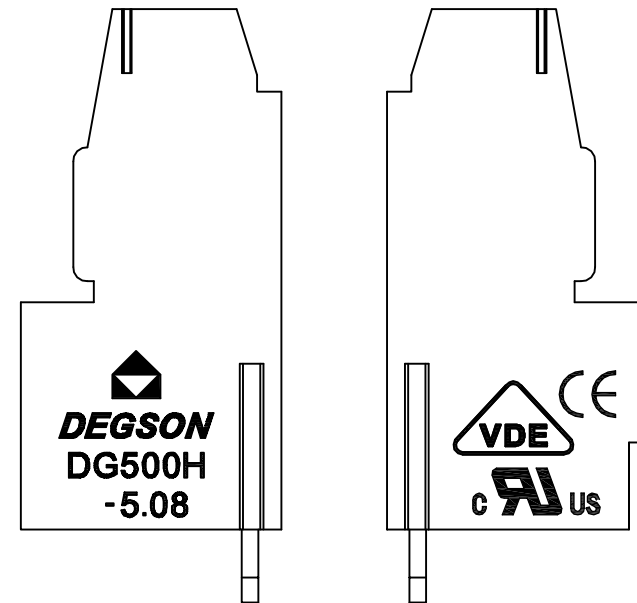


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/08/06
△		品名、料号增加环保标示“RoHS”	CSX	12/10/07

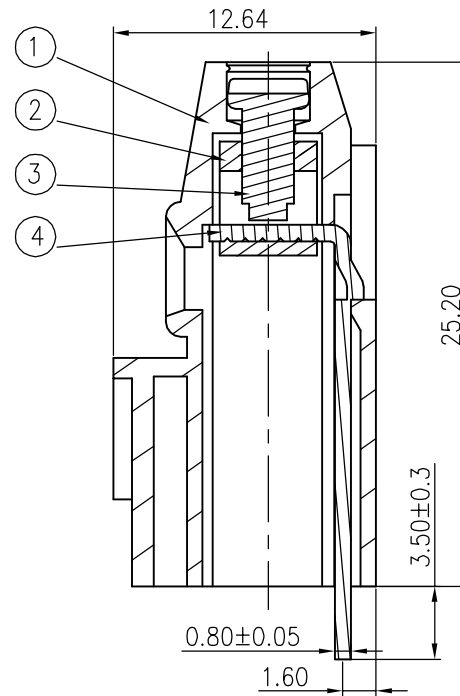

- Notes:
- Pitch: 5.08mm
 - Rated voltage/current: UL 300V/20A
VDE 250V/24A
 - Operation temperatures: -40° C ~ +105° C
 - Insulation Withstand Voltage: AC2000V/1min
 - Insulation Resistance: 5000MΩ/DC1000V
 - Wire Range: 28-12AWG, 2.5mm²
 - Max. Torque Value: M2.5 4.08kgf.cm
 - Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
to	over	over	to	over	over	over	
6	6 to 10	10 to 24	30	30 to 60	60 to 100	100 to 150	150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
							0.05/10

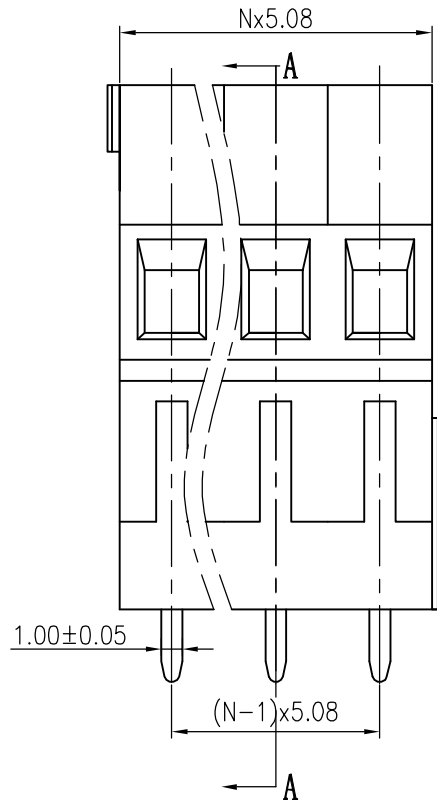

4	DG500H-Pin header	4038B00010 (H)	XX	Barss	SnCe
3	DG128"-Screws	S000001460 (H)	XX	Steel	Cr ³⁺ Zn
2	DG128 Cage	X000000020 (H)	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500H-5.08-Housing	4038A0YXXA (H)	1	PA66	UL94V-0

MM (INCH)	DFTO Zhwm	DATE 07/19/04
TOLERANCES EXCEPT AS NOTED	CHKD	DATE
	MFO	DATE
	APPVL	DATE
MM		
.0 ±	±	
.00 ±	±	
.000 ±	±	
ANGLES ± 1°	G.E :	
THIRD ANGLE PROJECTION	FINISH :	
	SCALE : 1:1	

宁波高正电子有限公司 DEGSON® DEGSON ELECTRONICS CO., LTD	
NAME	
DG500H-5.08-XXP-1Y-00A(H)	
DRAWING NO. DG500H-5.08-E01	SIZE A3
/PART NO.	REV T2 12/10/07
DO NOT SCALE DRAWING	SHEET 1 OF 1