


Digital oscilloscope

100MHz @ 500MS/s

I'M A GIRL WITH A LOVE OF BEAUTY. I'M A GIRL WITH A DESIRE OF GOOD. I'M A GIRL WITH A DESIRE OF
DESIRE OF GOOD. I'M A GIRL WITH A DESIRE OF GOOD APPEARANCE APPEARANCE.
I'M A GIRL WITH A GIRL WITH A DESIRE OF
I'M A GIRL WITH A GIRL WITH A DESIRE OF
I'M A GIRL WITH A GIRL WITH A DESIRE OF

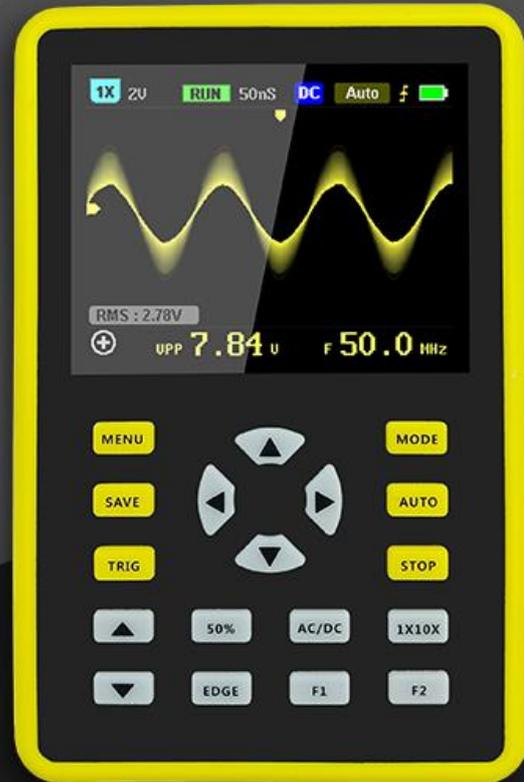

AUTO
Anti-burn

official product

Super cost-effective

Parameter

Model	FNIRSI-5012H	Highest test voltage	1X:80V 10X:800V
Channels	1	Cursor	Position XY Trigger Y
LCD size	2.4 Inch	Scan mode	Support
LCD Resolution	320 * 240	One-button AUTO	Support
Display technology	TFT	Waveform storage	Up to 2000 wave
Bandwidth	100MHz	Waveform manager	Support
Sampling Rate	500MS/s	Voltage accuracy	± 2%

Rise time	< 3nS	Frequency Precision	±0.01% High precision
Storage depth	128KB	Parameter	12 kinds in total
input resistance	1MΩ	Battery	3000mah Lithium
Sensitivity	50mV ~ 200V	Standby	8 Hours
Time base	50S ~ 6nS	Afterglow	1 ~ 8 Adjustable
Trigger mode	Single/Normal/Auto	Charging	5V/1A/2A/3A/4A
Trigger edge	Rising / Falling	Dimensions	114mm * 74mm * 33mm
coupling	AC/DC	Accessories	100MHz probe, USB, Instruction manual

