


Inverse Type Gds A-M



Number of contacts


78 + 2, 60 + 4
42 + 6, 24 + 8
6 + 10

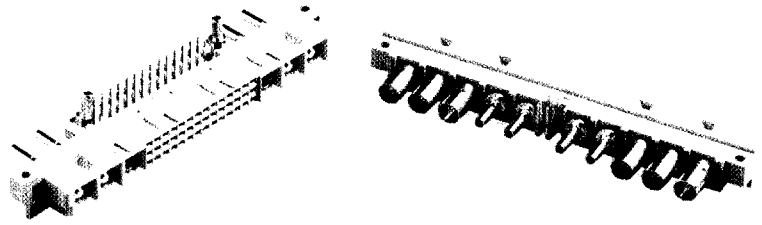

Female Connectors


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612, explanations page 10	2	1
Female Connector with angled solder pins	78 + 2		09 73 178 7801	09 73 178 6801	09 73 178 2801*	
	60 + 4		09 73 160 7801	09 73 160 6801	09 73 160 2801*	
	42 + 6		09 73 142 7801	09 73 142 6801	09 73 142 2801*	
	24 + 8		09 73 124 7801	09 73 124 6801	09 73 124 2801*	
	6 + 10		09 73 106 7801	09 73 106 6801	09 73 106 2801*	

Dimensions

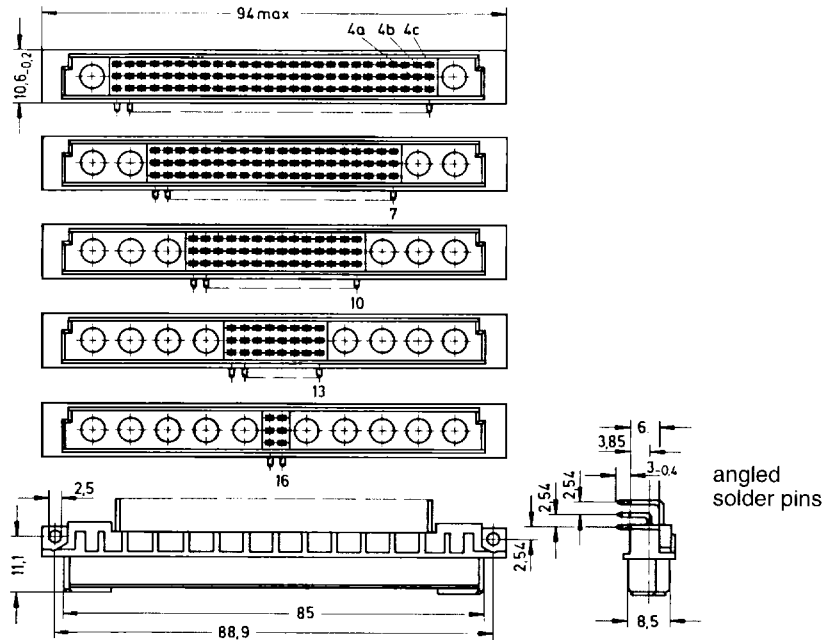

Order separately high current, high voltage, coaxial and fibre optic contacts, see page 42

Board drillings

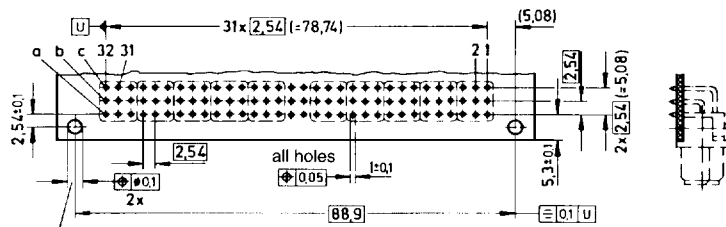

The diameters of the fixing holes have to be adjusted to the fixing arrangement

Mating conditions page 10

Dimensions in mm