



DIM	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

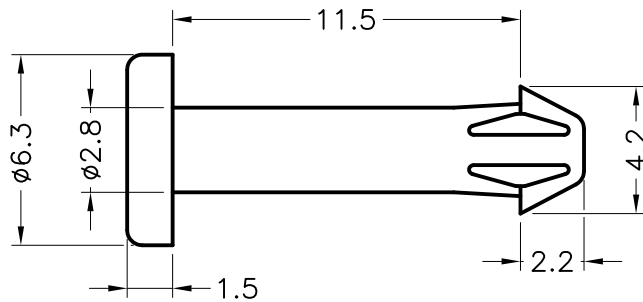

BODY

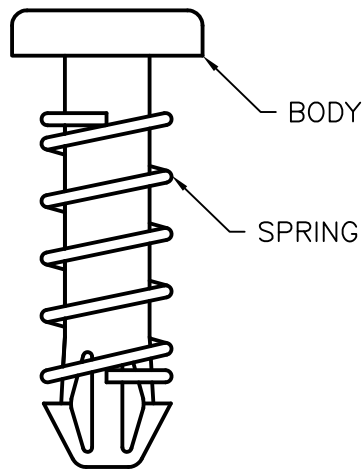


TOTAL COIL	6
Direction	To Right
Spring Diameter	ø0.5 ^{±0.05}
Outside Diameter	ø4.3
Total Length	9.0 ^{REF.}

HOLE IN PCB ø3^{+0.2}
HOLE IN HEAT SINK ø3.2⁻⁰

NOTE: All measurement does not include gate which raises under 0.3mm.

符合歐盟ROHS規範 (RoHS Compliant)	
★鉛Pb	<1000PPM
★鎘Cd	< 100PPM
★汞Hg	<1000PPM
★六價鉻Cr6+	<1000PPM
★多溴聯苯類PBBs	<1000PPM
★多溴聯苯醚類PBDEs	<1000PPM

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE		SPEC. DWG.	
				BODY MATERIAL		DATE	
NYLON 66 UL94V-2		2006.10.25		DRAWN		leeya	
SPRING MATERIAL		SPRING FINISH		CHECK		APPROVED	
SWP		NI PLATED		BLACK		UNLESS OTHERWISE SPECIFIED TOLERANCE	
PART NUMBER		DRAWING NUMBER		SEE ABOVE			
HSR-16		HSR-16					
SIZE	SCALE	UNIT	REV				
A4	NONE	mm	A				