

DIP Switch Series

KLS7-KL-SMT Type DIP Switch Series







SPECIFICATIONS

- Mechanical life: 2000 operations per switch
- Operation Force : $\leq 9.8\text{N}$ max.
- Stroke: 2.0mm
- Operation Temp: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Electrical life: 2000 operations per switch-24 VDC, 25mA
- Contact Resistance: 50m max. at initial
- Non-Switching Rating: 100mA, 50VDC
- Switching Rating: 25mA, 24VDC
- Circuit: Single pole single throw

Soldering and Cleaning Processes
Keep all switch contacts in their "OFF" position for all operations



Model No.	No. Pos.	A
KL-02	2	6.02
KL-03	3	8.56
KL-04	4	11.10
KL-05	5	13.64
KL-06	6	16.18
KL-07	7	18.72
KL-08	8	21.26
KL-09	9	23.86
KL-10	10	26.34
KL-12	12	31.42

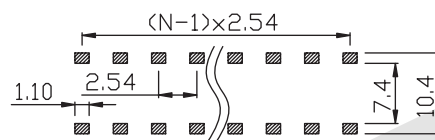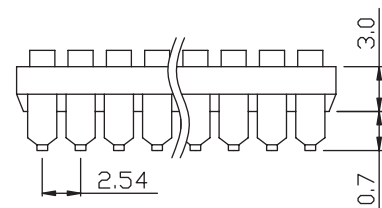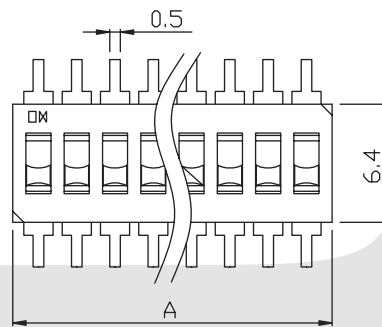

ORDER INFORMATION

KLS7-KL - XX - N - 0 0

- Part Number
- KL : Bulge Type Dip Switch
- KLR: Recessed Type Dip Switch
- Number of Pos.: 02~12 Pos.
- Packaging: 0=Tube 1=Tape
- 0: Non-sealed
- 1: With sealed
- Color: N=Black