RoHS Compliance

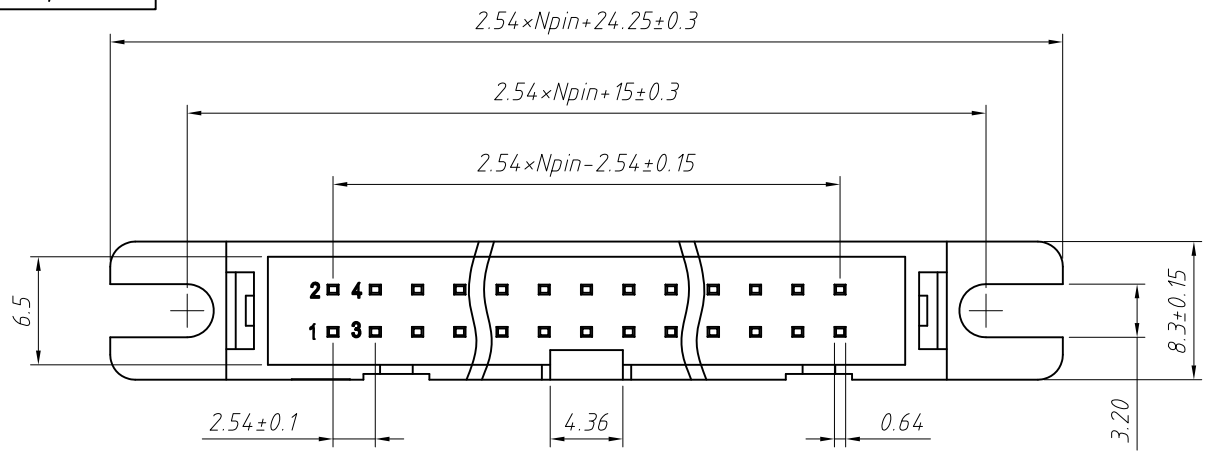

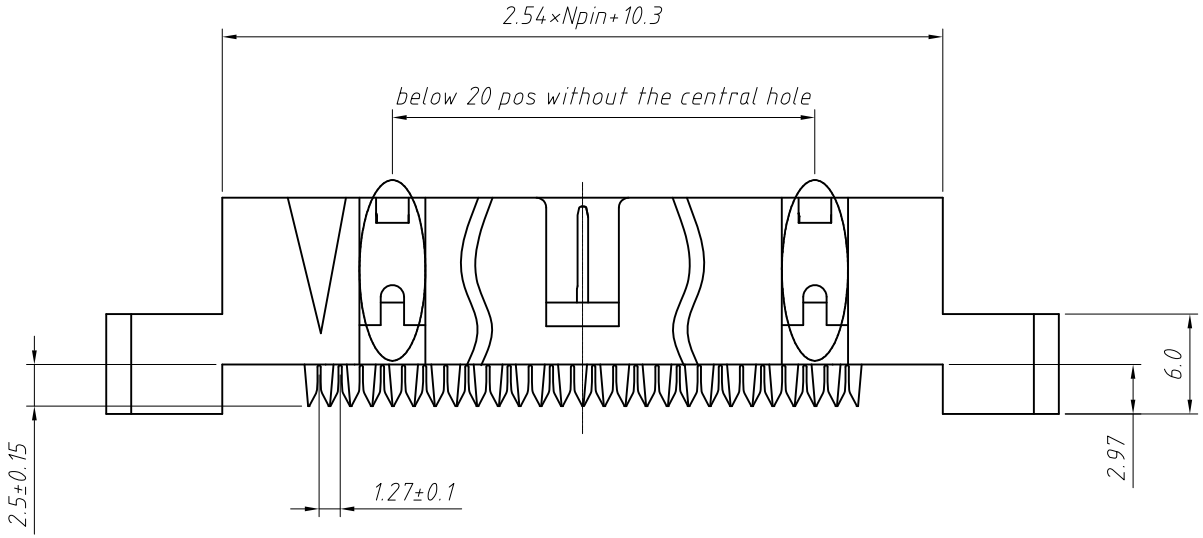



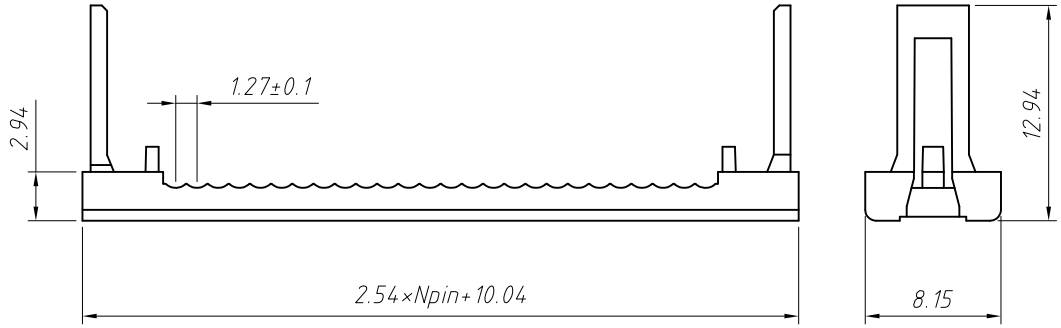

Material:
Housing: PBT UL94V-0
Contacts: Brass
Plating: Au or Sn Over Ni
Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:
Current Rating: 3.0 AMP
Withstand Voltage:1000V AC
Insulator Resistance: 1000M Ohm min
Contact Resistance: 20m Ohm max.
Operating Temperature: -40°C~+105°C
Max.Processing Temp:180°C for 30-60 seconds
(200°C for 10 seconds)

Order Information:
L-KLS1-201Z-XX-G-E

- L: RoHS
- IDC connectors
- 2.54mm Pitch
- XX-No.of 06~64pin
- Color:B-Black G-Gray
- Type:
  - E-With ears N-Without ears

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			2.54mm Pitch IDC Box Header Connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-201Z-XX-G-E
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	

RoHS Compliance

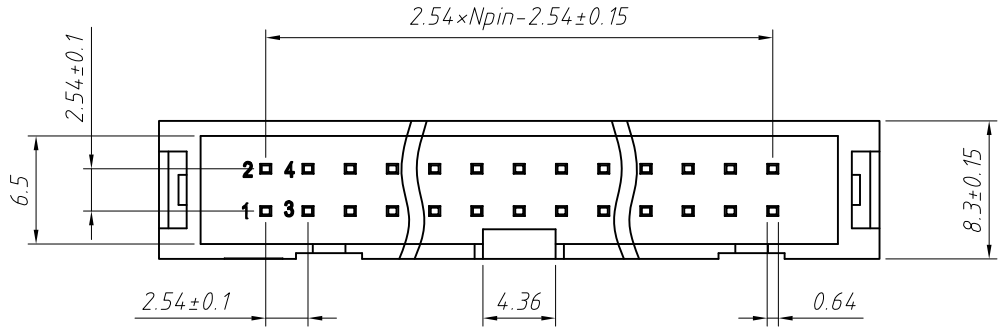

Material:
Housing: PBT,UL94V-0
Contacts: Brass
Plating: Au or Sn Over Ni
Cable: 1.27mm (0.050") pitch flat cable

Electrical Characteristics:
Current Rating: 3.0 AMP
Withstand Voltage:1000V AC
Insulator Resistance: 1000M Ohm min
Contact Resistance: 20m Ohm max.
Operating Temperature: -40°C~+105°C
Max.Processing Temp:180°C for 30-60 seconds
(200°C for 10 seconds)

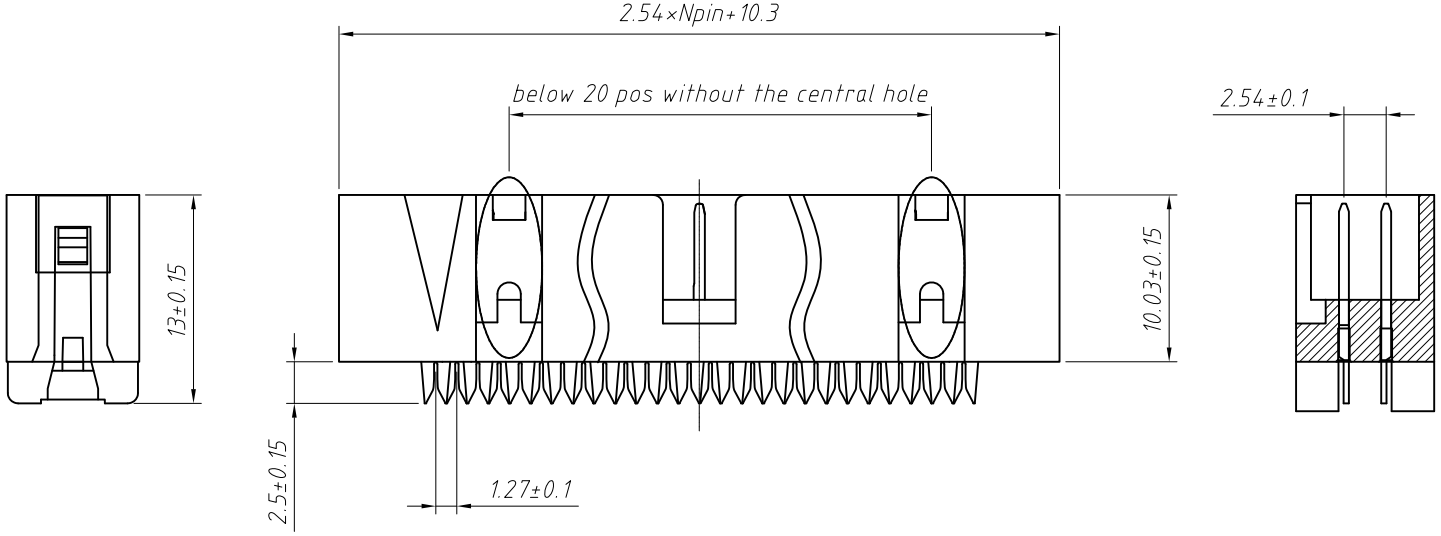

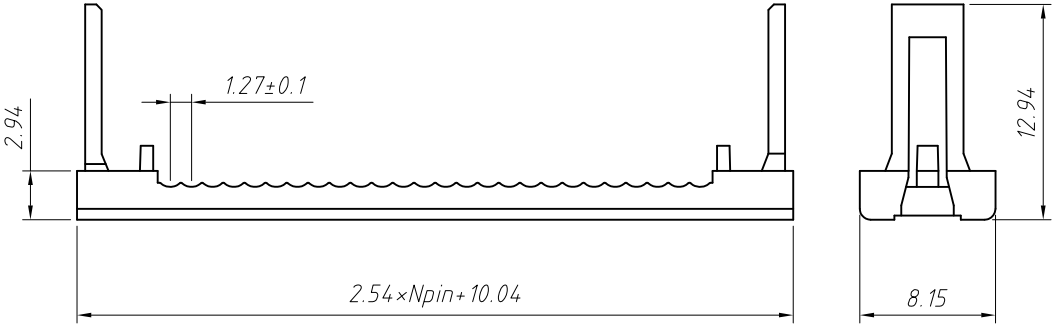

Order Information:
L-KLS1-201Z-XX-G-N

L: RoHS
IDC connectors
2.54mm Pitch
XX-No.of 06~64pin
Color:B-Black G-Gray
Type:
E-With ears N-Without ears

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			2.54mm Pitch IDC Box Header Connector	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	L-KLS1-201Z-XX-G-N
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2018-07-10	NingBo KLS ELECTRONIC CO.,LTD.
x.xxx ±0.10	Check:	Daniel	2018-07-10	