

## D-SUB Series

### KLS1-222 D-SUB I.D.C TYPE

#### Electrical Specification:

Current Rating: 2 AMP  
 Insulator Resistance: 5000M ohms min. at DC 500V  
 Contact Resistance: 20m ohms max. at DC 100mA  
 Operating Temperature: -55°C~+105°C


#### Material:

Housing: 30% Glass filled PBT UL94V-0  
 Contacts: Phosphor Bronze  
 Shell: Steel, 100u" Tin Over 50u" min Nickel  
 Clinch Nut: Brass, 100u" min Nickel Plated  
 Screwlock: Brass, 100u" min Nickel Plated



Male

Female

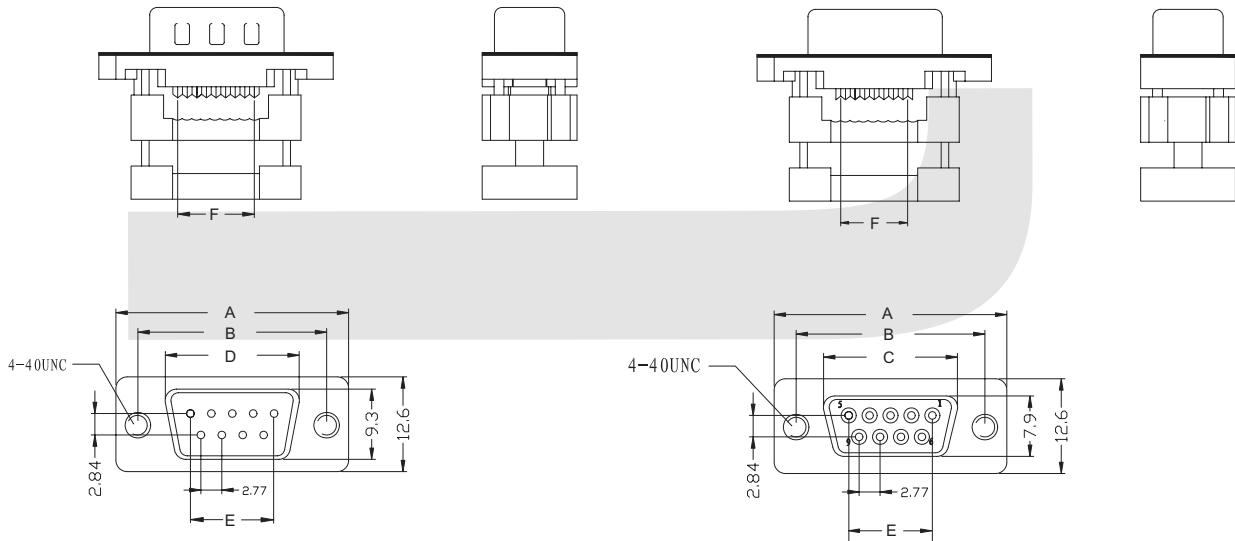

Dimension

Position	A	B	C	D	E	F
09	30.90	25.00	16.30	16.90	11.09	10.16
15	39.20	33.20	24.60	25.20	19.39	17.78
25	53.10	47.00	39.50	39.10	33.24	30.48
37	69.40	63.20	54.80	55.40	49.86	45.72

## ORDER INFORMATION

Product NO.: KLS1-222-XX -F -L

Pos. NO. \_\_\_\_\_ L=Blue B=Black  
 001=001 pos.  
 Contact Number of Row \_\_\_\_\_  
 222=D-SUB I.D.C. Series  
 Number of Contacts \_\_\_\_\_ M=Male F=Female