

# TERMINAL BLOCK Connector



## Screwless Series

KLS2-141V-2.54 Series Pitch=2.54mm

### Electrical :



- Rated voltage: 150V
- Rated current: 6A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: AC1500V/1Min
- Wire range: 26-20AWG 1.5MM<sup>2</sup>

### Material

- Pin header: Brass, Tin plated
- Housing: PA66, UL94V-0
- Wire guard: Stainless steel

### Mechanical

- Temp. Range: -40°C~+105°C
- MAX Soldering: +250°C for 5 Sec.
- Strip length: 11mm

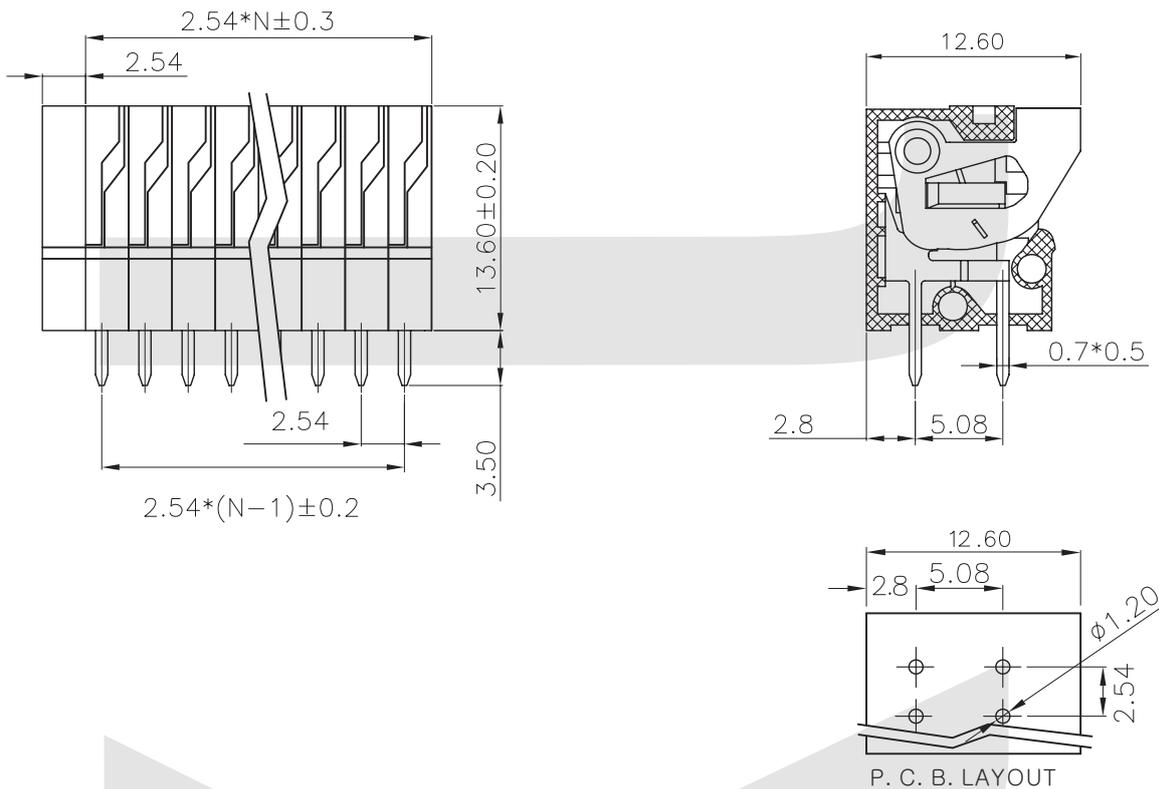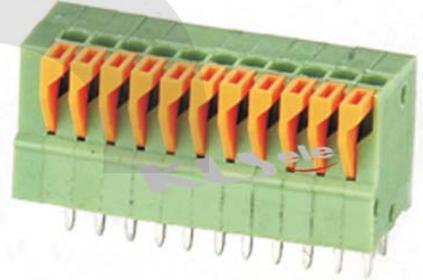

## ORDER INFORMATION

Product NO.: KLS2-141V-2.54-XXP X X

Pos. NO. _____	Customer Request		
Series No. _____		Color: 1=Gray	2=Blue
Pitch: 2.54=2.54mm		4=Green	5=Orange
Number of Pole _____		7=Transparent	8=Yellow
			3=Black
			6=Red
			9=White