

Trimmer Potentiometer

KLS4-WH06-1A Series

FEATURES

This specification applies to the variable resistors for electronic equipment Polyester substrate.

- *Long life model for low cost control pot applications
- *Since a variety of types are available, they can be used for a wide range of products
- *Special tapers
- *Low torque option

MECHANICAL SPECIFICATIONS

rotation angle: $210^\circ \pm 10^\circ$

rotation torque :2-35mN. M

ELECTRICAL SPECIFICATIONS

Range of nominal resistance: 1000Ω-2MΩ

Resistance taper: B

Resistance tolerance: $\pm 20\%$

Rotational noise: 5% R


Residual resistance: $R < 1\text{Kohm}$, Max 20ohm, $R \geq 1\text{Kohm}$, Max 2% R

Rated power: 0.1 W

Max. Operating voltage: DC50V

Mechanical endurance: 100 cycles

Operating temperature: $-25^\circ\text{C} \sim +70^\circ\text{C}$

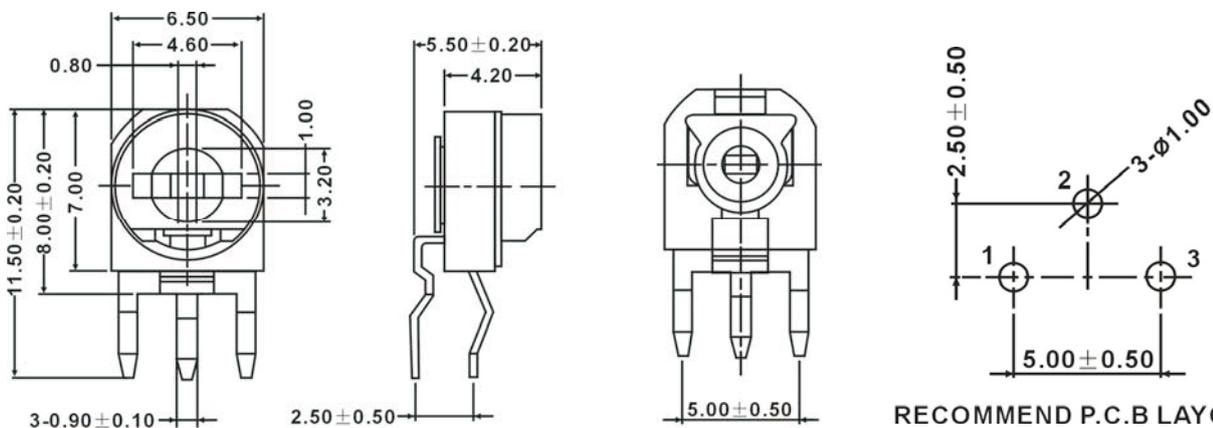

ORDER INFORMATION

Product No.: KLS4-WH06-1A-103

Pos. No.

6mm Trimmer potentiometer Series

Value: 103- 10000Ω