


1206 SMD fuse SLOW BLOW

Description: 12T,SMD Fuse,Time-Lag
 Security Certificate: UR/CUR
 Application: Circuit Protection for Electronics, electrical products
 Standard: UL 248-1, UL 248-14
 Working Temperature: -55°C~90°C
 Storage Temperature: -55°C~85°C
 Resistance Welding of Antipyretic: 260°C,10s Max
 Solderability: 235°C±5°C, 3.5s±0.5/-0s

Dimensions/ 尺寸

Unit 单位: mm


TOP VIEW/ 上面:

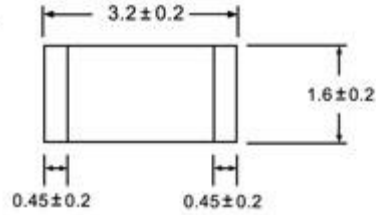

SIDE VIEW/ 侧面:



12T 平均 I-T 曲线图 (仅供参考)

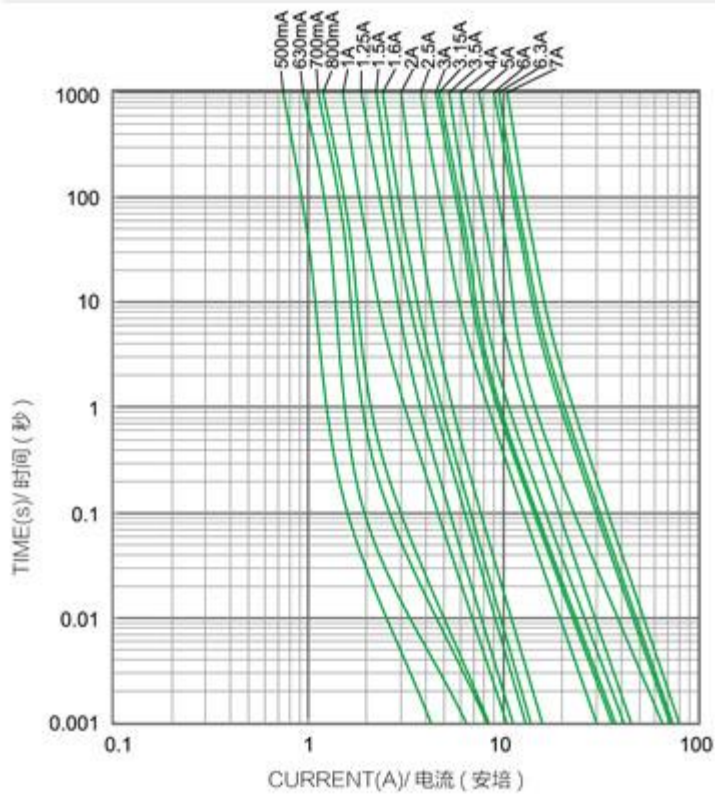

1206, RoHS Compliant & Pb-Free SURFACE MOUNT CHIP FUSE (SLOW-BLOW)

INTERRUPTING CAPACITY :

50A 63V AC (500mA-3A) 35A 24V AC (3.15A-7A)
 50A 63V DC (500mA-3A) 50A 32V DC (3.15A-7A)

ELECTRICAL CHARACTERISTICS :

