

LL01CR-SQxxL-Mx Data Sheet

For CREE Multi-Color and Single-Color LEDs



Features:

- High efficiency
- Available in 1 beam Patterns
- Optimized for uniform effects
- Lens with Housing

Typical applications :

- Stage Lighting
- Street Lights
- Decorative Light
- Architectural Lighting
- Down Light

Table of Contents

General Information.....	2
General Specifications.....	2
Optical Specifications.....	3
Mechanical Specifications.....	4
Illumination charts.....	5
Package Specifications.....	6
Product Nomenclature.....	7

General Information

- **Compatible Led Type :**

The LL01CR-SQxxL-Mx single lens are optimized for both Multi-Color R.G.B CREE LEDs and Single-Color Cree LEDs (Cree XM White)from Cree Opto. ⁽¹⁾

- **Beam Angle Type :**

An optimized profile integrate different front shape enable the generation of one lens model: biggest beam (60deg).⁽²⁾

- **The Way to Assembly :**

The Lens should be assembled to the PCB board or MCPCB upon LEDs which provides the most appropriate related position, so as to achieve the best uniform results

*** Manually installation or if necessary thermal glue are recommended.**

- **Function :**

LL01CR-SQxxL-Mx provides exceptional color mixing result with the highest efficiency through careful engineering and precision manufacturing process.

General Specifications

- Lens Material Optical Grade PMMA PC
- Operating Temperature range -40°C ~ +70°C (upper limit +80°C)
- Storage Temperature range -40°C ~ + 70°C (upper limit +80°C)

*Average transmittance in visible spectrum 400nm~700nm > 90%

Notes:

(1) Cree XM is a trademark of Cree,Inc , for technical information on LEDs, please refer to Cree,Inc, www.cree.com/xlamp.

(2) Typical beam divergence will be affected by different color of LEDs.

Optical Specifications [Typical beam Angle and intensity (cd/w) of LL01 lens]

• CREE XM LED

Typical Cone Angle (degree) ⁽³⁾ with CREE XM			
Part Number	Red LEDs	Green LEDs	Blue LEDs
LL01CR-SQ60L-M2	--	--	--

The typical cone angle measures where the luminous intensity is 90% of the peak value of intensity. This typical cone varies with LED color due to different chip size and chip position tolerance.

Typical on axis intensity (cd/w) ⁽⁴⁾ with CREE XM			
Part Number	Red LEDs	Green LEDs	Blue LEDs
LL01CR-SQ60L-M2	--	--	--

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs data sheet for more details on Flux binning and mechanical tolerance.

• CREE XM LED

Typical Cone Angle (degree) ⁽³⁾ with CREE XM			
Part Number	White LEDs	Warm white LEDs	
LL01CR-SQ60L-M2	58	--	

The typical cone angle the full angle measured where the luminous intensity is 90% of the peak value of intensity. That typical cone varies with LED color due to different chip size and chip position tolerance.

Typical on axis intensity (cd/w) ⁽⁴⁾ with CREE XM			
Part Number	White LEDs	Warm white LEDs	
LL01CR-SQ60L-M2	330	--	

Luminous intensity depends on the flux binning and tolerance of the LEDs. Please refer to the LEDs data sheet for more detail on Flux binning and mechanical tolerance

Notes:

(3) The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.


(4) The efficiency value listed above is the total value of the whole lens model, the value depends on the total flux of the LED used. Luminous intensity depends on the LEDs flux and its tolerances, for more details of LED flux, please check Cree data sheet at www.cree.com.

Mechanical Specifications


Usage and Maintenance :

1. If necessary, clean lenses with mild soap, water and soft cloth
2. Never use any commercial cleaning solvents on lenses, like alcohol
3. Please handle or install lenses with wearing gloves, skin oils may damage lens or its optical characteristic.


1. Lens + Leds+MCPCB assembly instruction

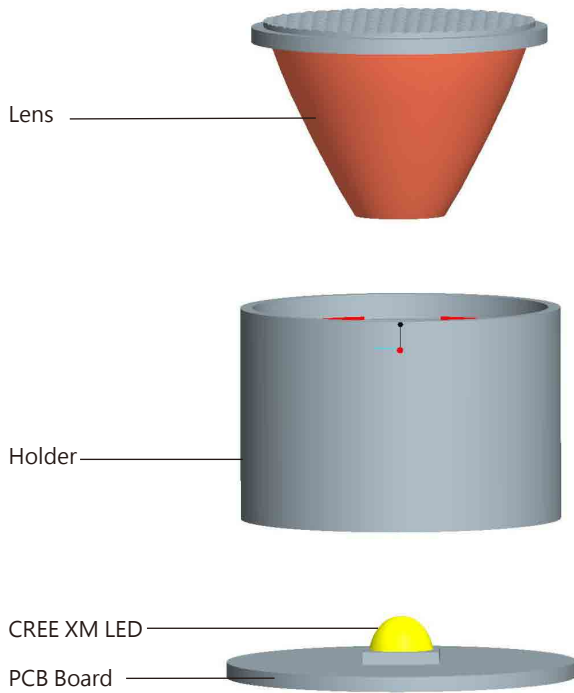


2. View assembly lens with MCPCB:

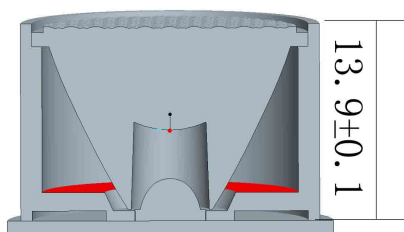

3. Lens dimensions and Top Views:

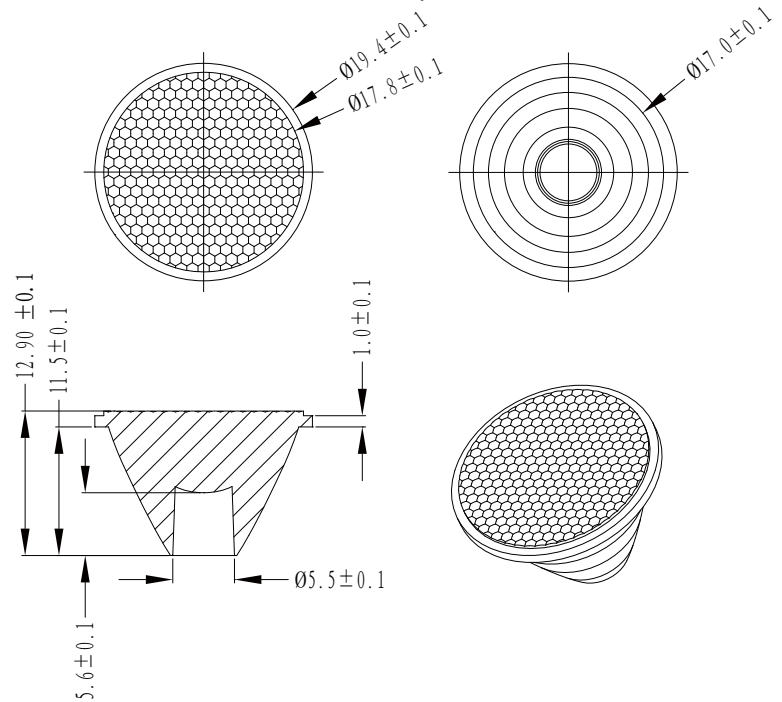

4. Lens assembly Dimensions and Top Views :

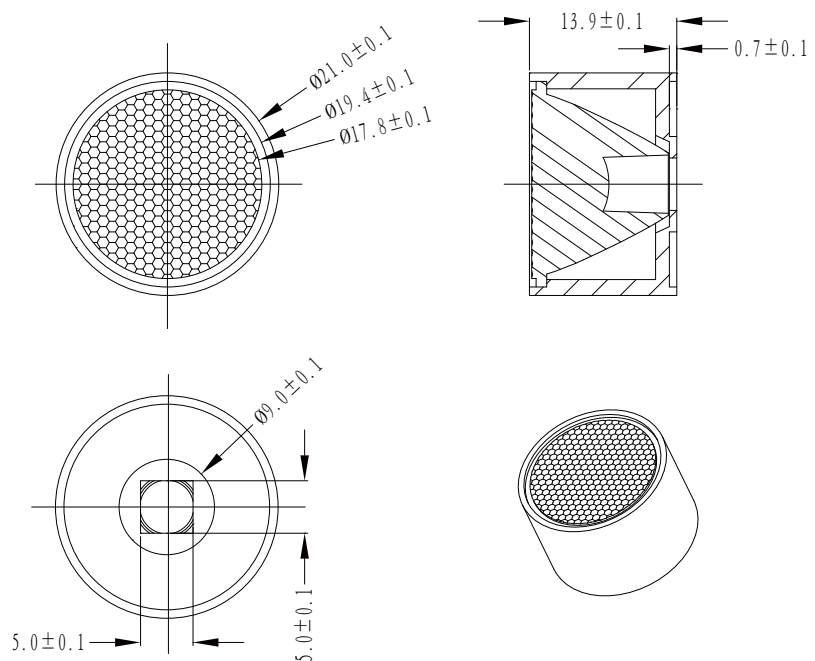
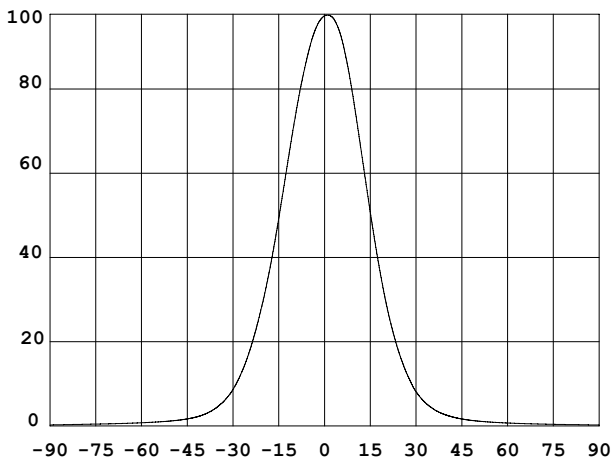
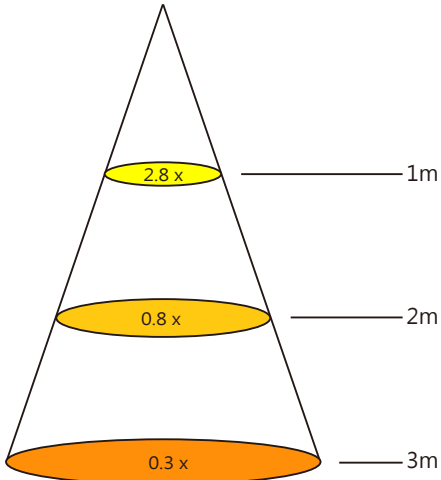


Notes:

- (1) All dimensions are in mm.
- (2) Drawing not to scale.
- (3) Collimator material is PMMA.

Illumination charts


*CREE single white LED: CREE XM

LL01CR-SQ60L-M2	
1. Beam Pattern	
	
2. Light Distribution Curve	
 <p>The graph shows a bell-shaped curve representing the light distribution. The vertical axis (Y-axis) represents relative intensity from 0 to 100 in increments of 20. The horizontal axis (X-axis) represents the angle in degrees from -90 to 90 in increments of 15. The curve peaks at 100% at 0 degrees and reaches approximately 50% at ±15 degrees, and approximately 10% at ±30 degrees.</p>	
3. Illuminance	
 <p>The diagram shows a cone representing the beam spread. Three horizontal ellipses are drawn across the cone at different heights, representing the beam diameter at specific distances. The top ellipse is at 1m and labeled '2.8 x'. The middle ellipse is at 2m and labeled '0.8 x'. The bottom ellipse is at 3m and labeled '0.3 x'. Lines connect the labels to their respective ellipses.</p>	



Notes: The Flux of CREE XM LED is 117 lm

Package


Item	Quantity	Total	Size (long*width* high)
Tray	100	100pcs	34*30*3.5 cm
Inner box	10tray/box	1000pcs	35*31*21 cm
Outer box	2 Inner box/outer box	2000pcs	64.7*36.5*24 cm

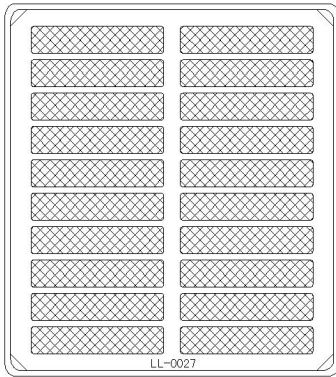

100pcs/tray

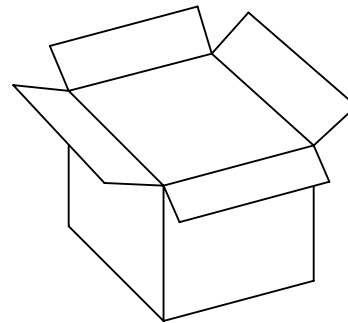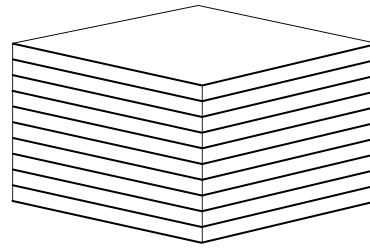

1000pcs/inner box

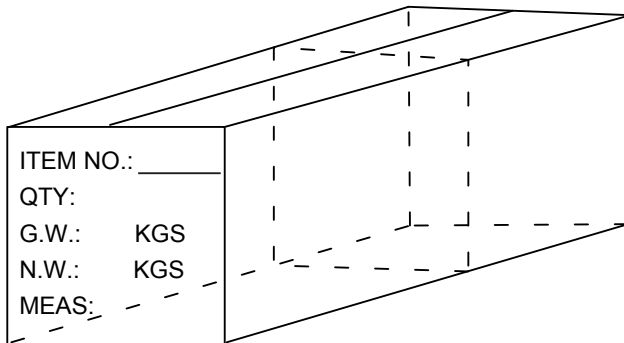

2000pcs/outer box

Product Nomenclature

