


## NPN General Purpose Amplifier

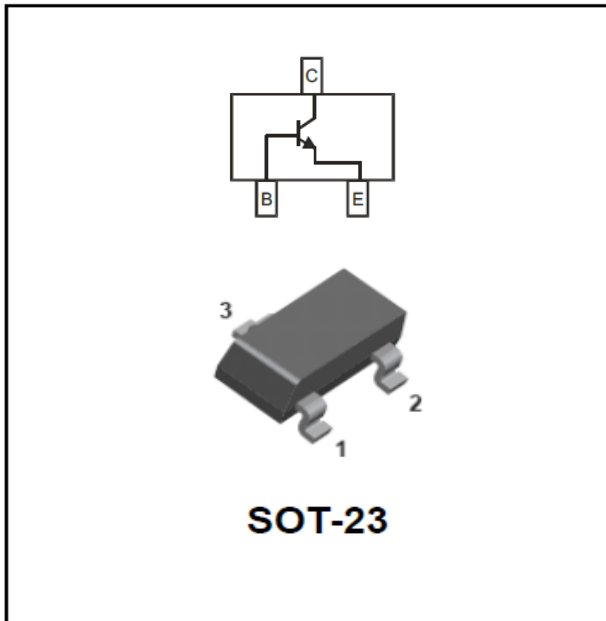

### Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking: 2X

### ■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Base Voltage	VCBO	V		60
Collector-Emitter Voltage	VCEO	V		40
Emitter-Base Voltage	VEBO	V		6
Collector Current -Continuous	IC	mA		600
Total Device Dissipation	PD	mW		300
Junction Temperature	Tj	°C		150
Storage Temperature	TSTG	°C		-55 to +150

### ■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{(BR)CBO}$	V	IC=10mA, IE=0	60		
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	V	IC = 1mA, IB=0	40		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	V	IE=100μA, IC=0	6		
Collector cut-off current	$I_{CEO}$	nA	VCB=35V, IB=0			100
Collector cut-off current	$I_{CBO}$	nA	VCE=60V, IC =0			100
Emitter cut-off current	$I_{EBO}$	nA	VEB=3 V, IC =0			100
DC current gain	$h_{FE}$	V	VCE=1V, IC=150mA	100		300
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	IC=150mA, IB=15mA			0.4
Base-emitter saturation voltage	$V_{BE(sat)}$	V	IC=150mA, IB=15mA			0.95
Transition frequency	$f_T$	MHz	VCE=10V, IC=20mA, f=100MHz	250		
Delay time	td	ns	VCC=30V, VBE(off)=0.2V IC=150mA, IB1=15mA			15
Rise time	tr	ns				20
Storage time	ts	ns	VCC=30V, IC=150mA, IB1=IB2=15mA			225
Fall time	tf	ns				30







# MMBT4401

RoHS  
COMPLIANT

## Ordering Information (Example)





PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMBT4401	F2	Approximate 0.008	3000	30000	120000	7" reel

## Characteristics (Typical)

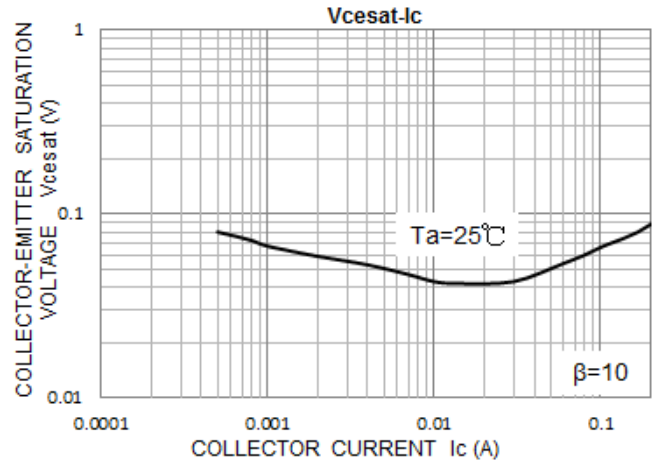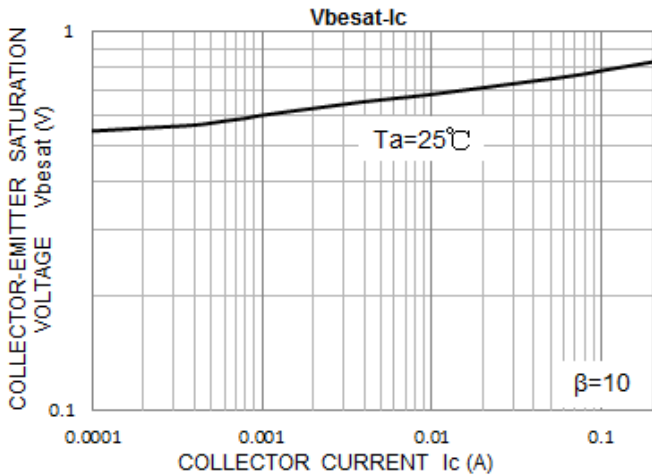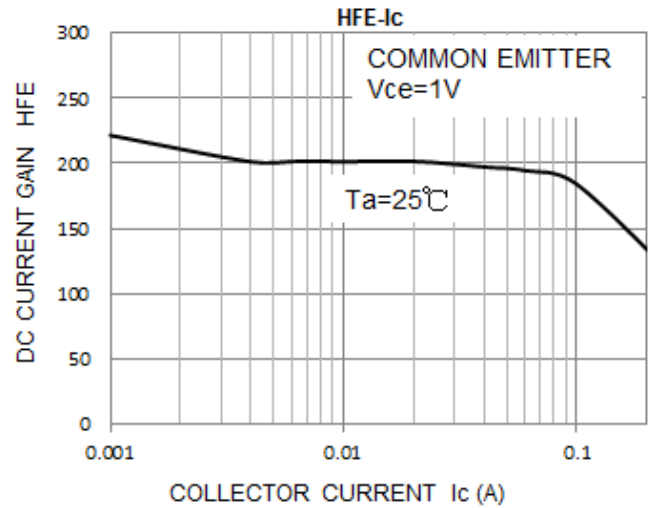
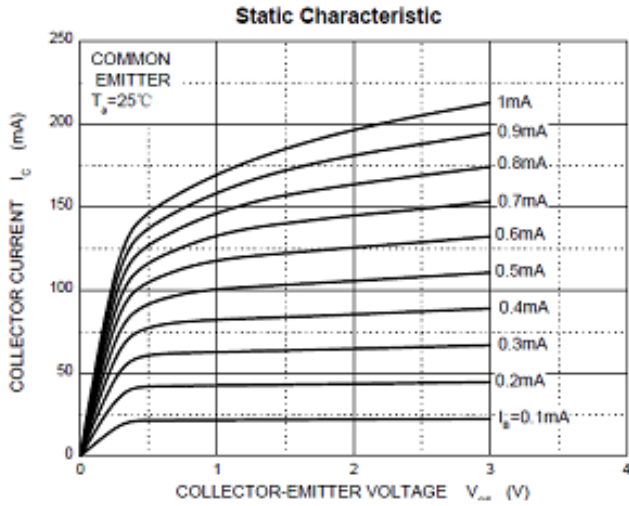




## ■ Characteristics (Typical)

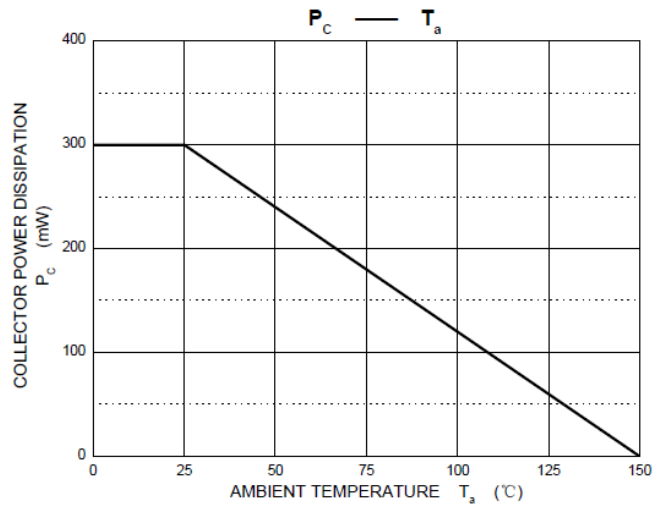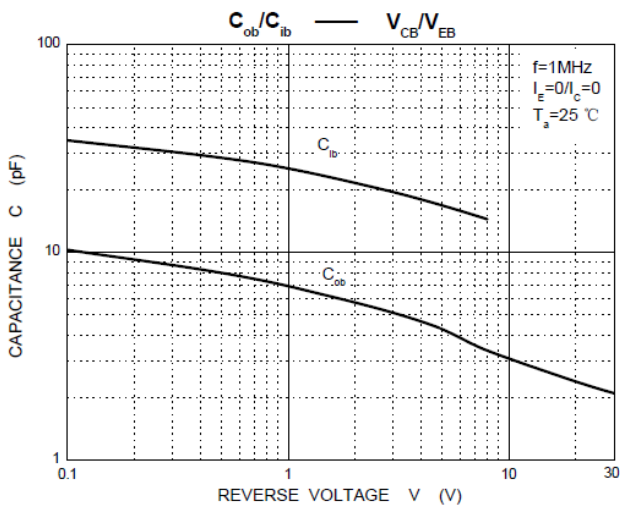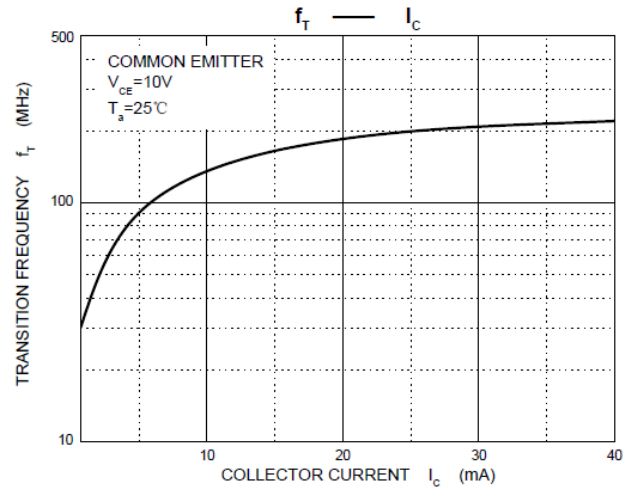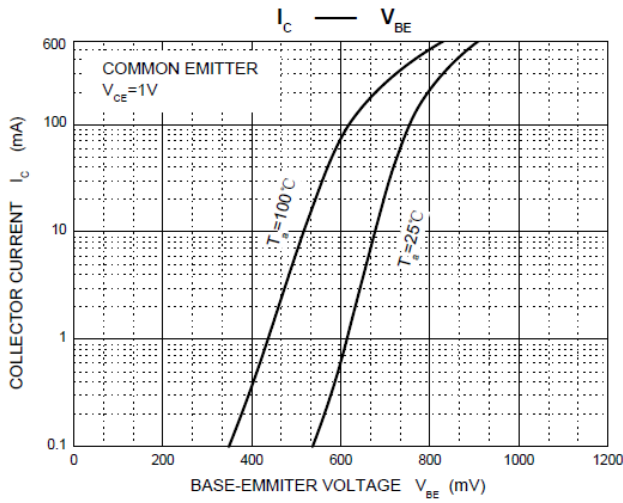


## ■SOT-23 Package Outline Dimensions

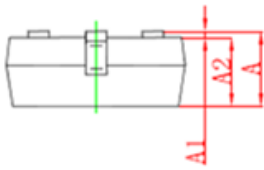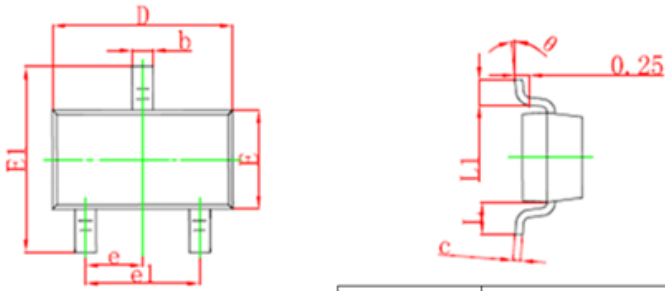

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## ■SOT-23Suggested Pad Layout

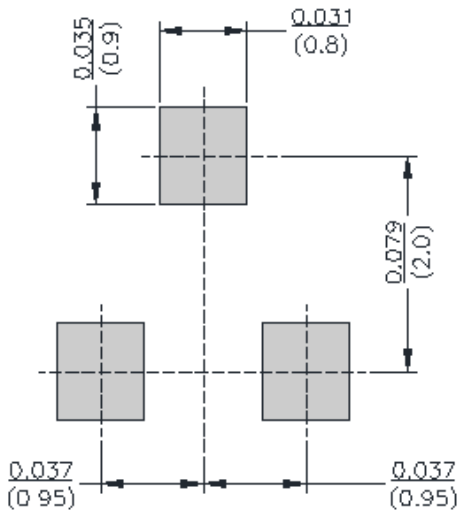



---

**Disclaimer**

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.