

Description

Report Item

Specifications:

The working voltage of the instrument itself: DC 4-30V

(the maximum input voltage cannot exceed 30V, otherwise the instrument will burn out)

The working current of the instrument itself: $\leq 20\text{mA}$

Voltage measurement range: DC 0-100V

Current measurement range: DC 0-10A

Voltage resolution (V): 0.1V

Current resolution (A): 0.01A

Measurement accuracy: 1% (± 1 digit)

Display: 0.28" digital tube, two-color blue and red

Refresh rate: about 300ms/time


Size: 48mm * 29mm * 26mm

Working temperature: -10°C - $+65^{\circ}\text{C}$

Package Included:

1x DC 100V 10A Voltmeter Ammeter

1. Wiring diagram of independent power supply for Tange 1A or 10A meter

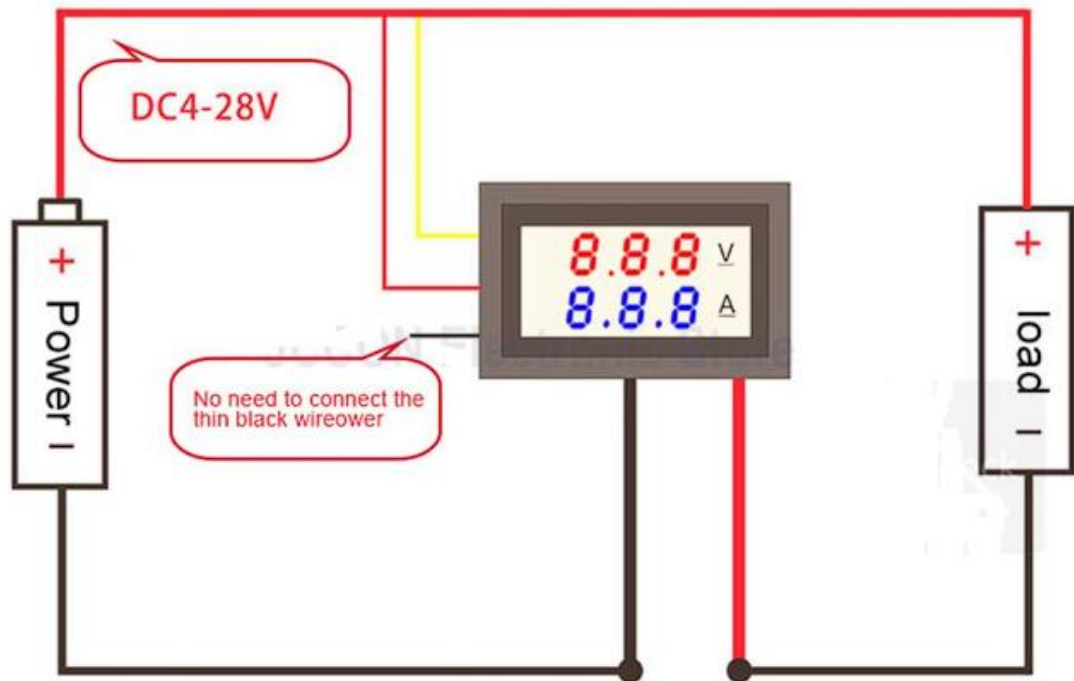

2. Wiring diagram of independent power supply for
Tange 1A or 10A meter

