

Add Device




① Step 1

Register and log in TUYA APP with mobile phone number, Select the security sensor and click on the sensor,



② Step 2

Select the security sensor shown in the picture below and enter the next step

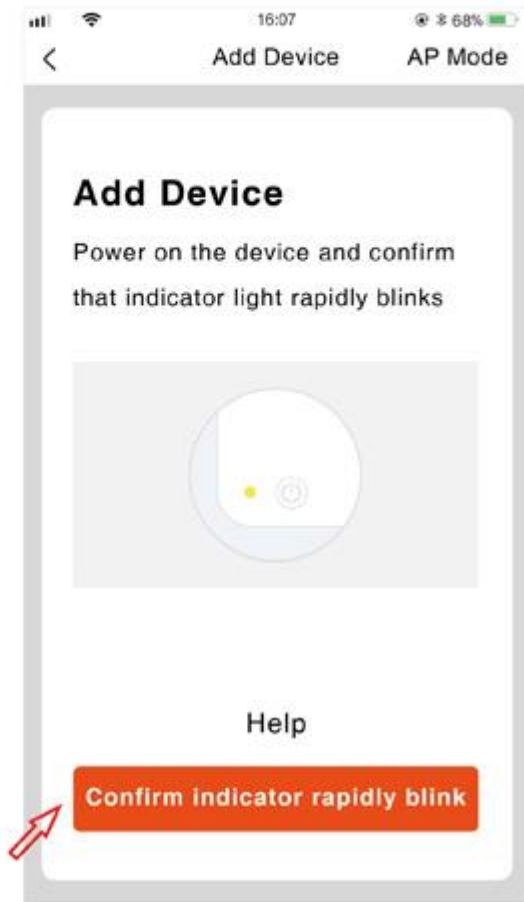


③ Step 3

Under the automatic network configuration mode, press and hold the reset button with the Pin card for 5 seconds to slow down flash of the indicator light as entering the manual network configuration mode. Choose the compatibility mode of APP




④ Step 4

Enter the "WIFI password" as prompted

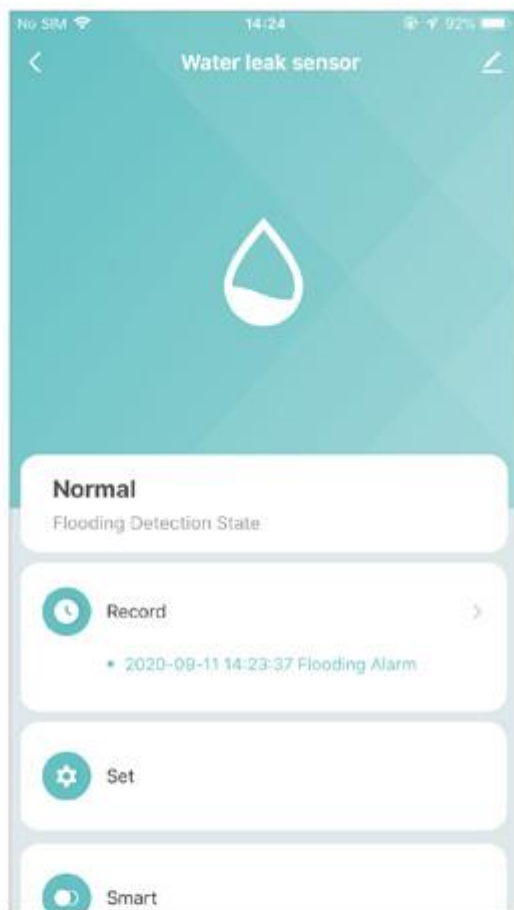

⑤ Step 5

The sensor probe will display "Normal" if without touching water.

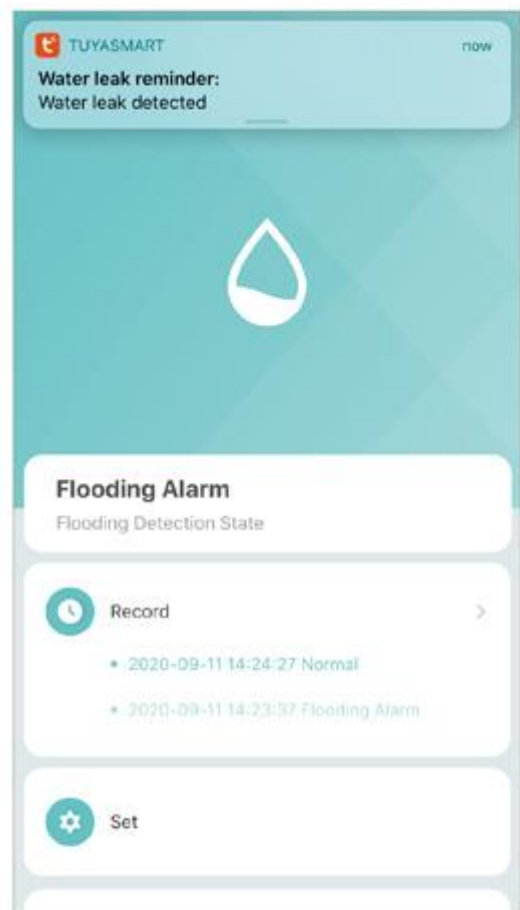


⑥ Step 6

If the probe detects water, APP will push notification and the buzzer will alarm, APP will display "Water leakage Alarm"


Products real shot



Water detect level From 0.4-3.2mm

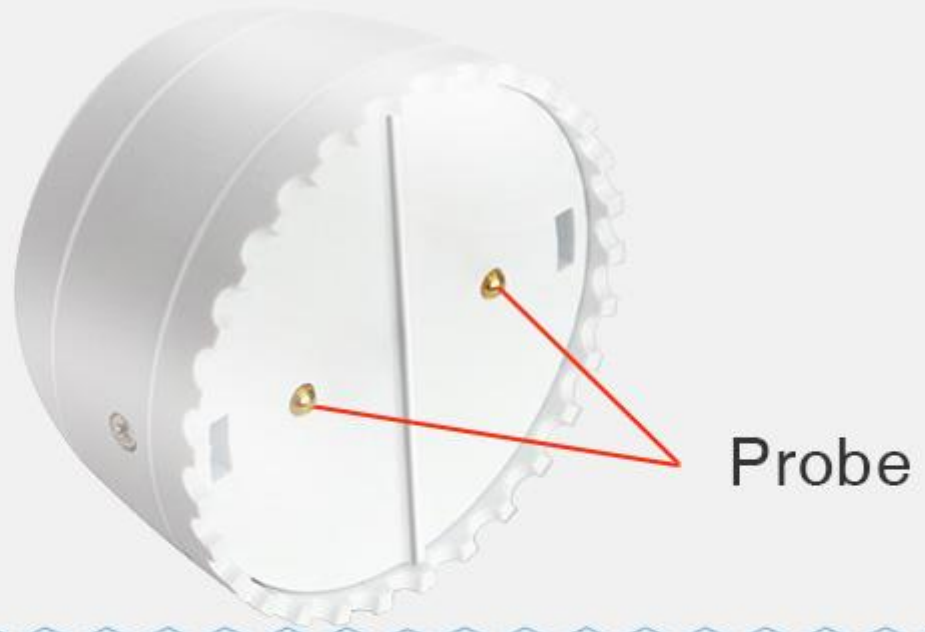

Product size chart

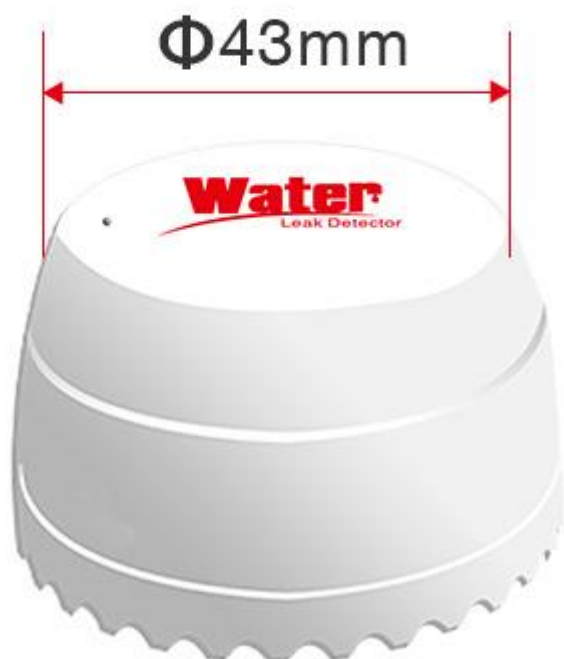

Technical Parameters

Input voltage:	DC3V CR123A
Quiescent current:	$\leq 20\mu\text{A}$
Alarm current:	$\leq 125\text{mA}$
Low-Voltage Indication:	$\leq 2.6\text{V}$
WiFi:	802.11b/g/n
Detection method:	water detection
Installation method:	Mount on the ground
Working temperature:	-10-50°C
Working humidity:	up to 95%RH