10W isolated DC-DC converter in SIP package Wide input and regulated single output



FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 88%
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current protection
- Operating ambient temperature range: -40°C to +85°C
- Compact SIP package
- Industry standard pin-out

VRB_S-10WR3 series are isolated 10W DC-DC converter products with a wide 2:1 input voltage range. They feature efficiencies of up to 88%, 1500VDC input to output isolation, operating ambient temperature of -40°C to +85°C, input under-voltage protection, output short-circuit, over-current protection and they are widely used in applications such as medical care, industrial control, electric power, instruments, communications and other industries.

election G	Juide						
	Part No.	Input Voltage (VDC)		Output		Full Load	Capacitive
Certification		Nominal (Range)	Max.®	Voltage(VDC)	Current (mA) Max./Min.	Efficiency [®] (%) Min./Typ.	Load (µF)Max.
	VRB1203S-10WR3		20	3.3	2400/0	80/82	2200
	VRB1205S-10WR3	12 (9-18)		5	2000/0	83/85	2200
	VRB1209S-10WR3			9	1111/0	84/86	680
	VRB1212S-10WR3			12	833/0	84/86	470
	VRB1215S-10WR3			15	667/0	84/86	330
	VRB1224S-10WR3			24	417/0	84/86	220
EN/BS EN	VRB2403S-10WR3		40	3.3	2400/0	82/84	2200
	VRB2405S-10WR3			5	2000/0	85/87	2200
	VRB2409S-10WR3	24 (18-36)		9	1111/0	86/88	680
	VRB2412S-10WR3			12	833/0	86/88	470
	VRB2415S-10WR3			15	667/0	86/88	330
	VRB2424S-10WR3			24	417/0	85/87	220

Notes:

①Exceeding the maximum input voltage may cause permanent damage; ②Efficiency is measured at nominal input voltage and rated output load.

Input Specifications						
Item	Operating Conditions		Min.	Тур.	Max.	Unit
	12VDC nominal input series, nominal input voltage	3.3V output		795/35	815/50	mA
		5V output		969/35	992/50	
Input Current (full load / no load)		Others		969/9	992/18	
Input Current (full load / no-load)	24VDC nominal input series, nominal input voltage 5V	3.3V output		389/25	398/45	
		5V output		474/25	485/45	
		Others		474/9	485/18	
Reflected Ripple Current				50		
	12VDC nominal input voltage		-0.7		25	VDC
Surge Voltage (1sec. max.)	24VDC nominal input voltage		-0.7		50	
Ctart up Voltage	12VDC nominal input voltage				9	
Start-up Voltage	24VDC nominal input voltage				18	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.21-A/7 Page 1 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

DC/DC Converter VRB_S-10WR3 Series



minai input voltage	12	155		VDC		
	12	15.5				
		Capacitance filter				
		Unavailable				
1	Ctrl pin	Ctrl pin open or pulled high (3.5-12VDC)				
Module off Ctrl pin pulled lo		n pulled low t	w to GND (0-1.2VDC)			
ent when off		6	10	mA		
f		Ctrl pi	Unava Ctrl pin open or pulle Ctrl pin pulled low t	Unavailable Ctrl pin open or pulled high (3.5-12 Ctrl pin pulled low to GND (0-1.2)		

Note: *The Ctrl pin voltage is referenced to input GND.

Output Specifications						
Item	Operating Conditions		Min.	Тур.	Max.	Unit
Voltage Accuracy [®]	5%-100% load			±1.5	±2	
Linear Regulation	Input voltage variation from	Input voltage variation from low to high at full load		±0.25	±0.5	%
Load Regulation [®]	5%-100% load			±0.5	±l	1
Transient Recovery Time				300	500	μs
	25% load step change 3.3V/5V o Others	3.3V/5V output		±5	±8	%
Transient Response Deviation		Others		±3	±5	
Temperature Coefficient	Full load	· · · · · · · · · · · · · · · · · · ·			±0.03	%/°C
Ripple & Noise [®]	20MHz bandwidth, 5%-100%	20MHz bandwidth, 5%-100% load			150	mV p-p
Over-current Protection	1	110	160	230	%lo	
Short-circuit Protection			Continuous, self-recovery			
	· · · · · · · · · · · · · · · · · · ·					

Note: (1) Under 0%-5% load conditions, the maximum output voltage accuracy is \pm 3%;

 $^{(2)}$ Load regulation for 0%-100% load is ±3%;

③ Under 0% -5% load conditions, ripple & noise does not exceed 300mV, please refer to Fig.2 for testing method.

General Specificatio	n				
Item	Operating Conditions	Min.	Тур.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500			VDC
Insulation Resistance	Input-output resistance at 500VDC	1000			MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V		1000		pF
Operating Temperature	See Fig. 1	-40		+85	°C
Storage Humidity	Non-condensing	5		95	%RH
Storage Temperature		-55		+125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds			+300	Ċ
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			and Z
Switching Frequency *	PWM mode		500		kHz
MTBF	MIL-HDBK-217F@25°C	1000			k hours

Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

Mechanical Specifications					
Case Material	aterial Black plastic, flame-retardant and heat-resistant (UL94 V-0)				
Dimension	22.00 x 9.50 x 12.00 mm				
Weight	5.5g (Тур.)				
Cooling Method	Free air convection (20LFM)				

MORNSUN[®]


MORNSUN Guangzhou Science & Technology Co., Ltd.


DC/DC Converter VRB_S-10WR3 Series


MORNSUN®


Electrom	agnetic Co	mpatibility (EMC)		
Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.4-2) for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig.4-2) for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6kV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.4-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line $\pm 2kV$ (see Fig.4- \oplus for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

Typical Characteristic Curves

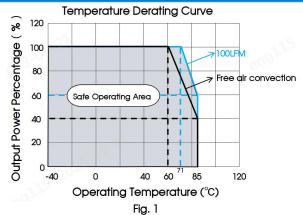


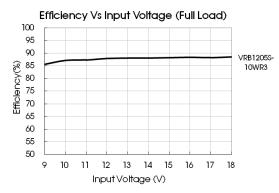




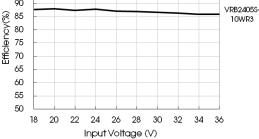

Efficiency Vs Output Load(Vin=12V)

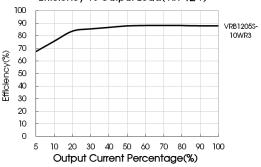

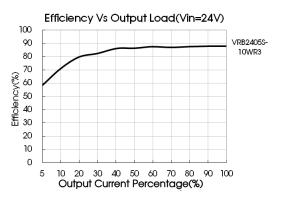

MORNSUN[®]

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.21-A/7 Page 3 of 5


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation



Design Reference


1. Ripple & Noise

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Please keep the wire of probe to copper as short as possible.

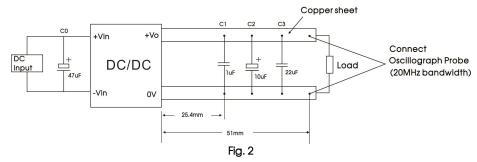


2. Typical application

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values Cin and Cout and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



C	Sin		Cout	
Vin: 12VDC	Vin: 24VDC	Vout(VDC)	Cour	
	47µF/100V	3.3/5/9	22µF/16V	
47µF/50∨		12/15	22µF/25V	
		24	22µF/50V	

3. EMC solution-recommended circuit

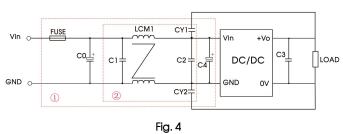

Notes: We use Part 1 in Fig. 3 for Immunity test and part 2 for Emissions test. Selecting based on needs.

Parameter description:

1111							
	Model	Vin: 12VDC	Vin: 24VDC				
	FUSE	Choose according t	o actual input current				
	C0/C4	330µF/35∨	330µF/50V				
	C1/C2	10µF/50V					
	C3	Refer to the Cout in Fig2					
	LCM1	470µH, recommended to use MORNSUN's FL2D-13-471R3					
	CY1/CY2	1nF/2000VDC					

4. The products do not support parallel connection of their output

5. For additional information please refer to DC-DC converter application notes on <u>www.mornsun-power.com</u>


MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.21-A/7 Page 4 of 5 MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation


DC/DC Converter VRB_S-10WR3 Series

Dimensions and Recommended Layout

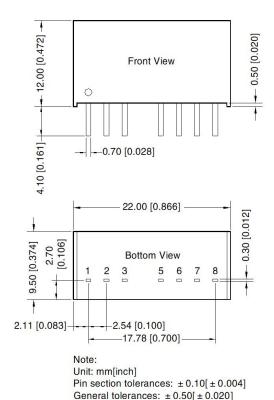

THIRD ANGLE PROJECTION \bigoplus

MORNSUN®



Note: Grid 2.54*2.54mm

Pin-Out					
Pin	Mark				
1	GND				
2	Vin				
3	Ctrl				
5	NC				
6	+Vo				
7	0V				
8	NC				

NC: Pin to be isolated from circuitry

Note:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com</u>. Packaging bag number: 58210004;
- 2. The maximum capacitive load offered were tested at input voltage range and full load;
- 3. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 4. All index testing methods in this datasheet are based on our company corporate standards;
- 5. We can provide product customization service, please contact our technicians directly for specific information;
- 6. Products are related to laws and regulations: see "Features" and "EMC";
- 7. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

 Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China

 Tel: 86-20-38601850
 Fax: 86-20-38601272

 E-mail: info@mornsun.cn
 www.mornsun-power.com

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2023.09.21-A/7 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation