




# DEGSON ELECTRONICS CO., LTD.

## Product Specification



**15EDGKM-5.08**

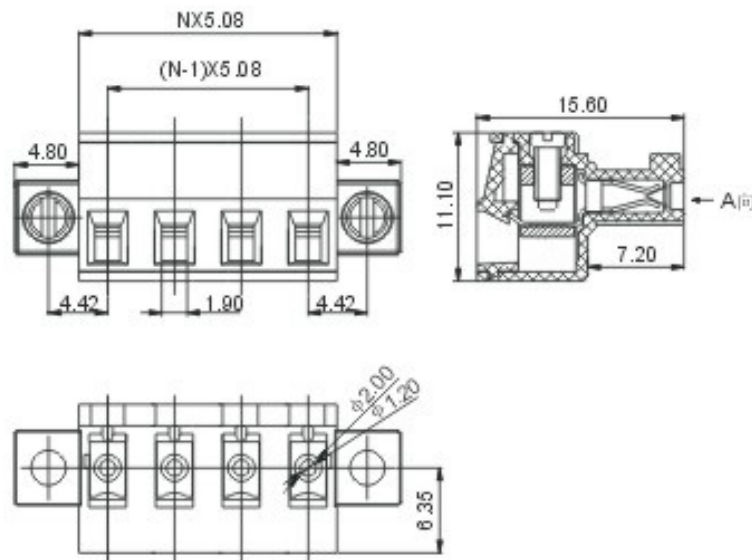

Approval	UL	VDE
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	0.5-1.5mm <sup>2</sup>
With standing voltage	AC2000V/1Min	

<b>Mechanical</b>	
Torque	0.2Nm (1.7Lb-In.)
Ambient temperature	-40°C ~ +105°C
Strip length	7mm
<b>Dimensions</b>	
Pitch	5.08mm (.200")
Poles	2P-12P

<b>Material</b>	
Housing	PA66, UL94V-0
Screws	M2, steel, Cr <sup>3+</sup> Zn plated
Contact	Phosphor bronze
Cage	Brass, Ni plated

### HOW TO ORDER

Ordering code: **15EDGKM-5.08** -   **P** -   -    Customer Request

Series Number: 15EDGKM-5.08

Number of Pole:   **P**

Color:

1 Grey	4 Green	7 Transparent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

Terminal Pitch Selection:

1 Single pitch
2 Double pitch

	<b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>15EDGKM-5.08</b>