

User Manual

1. Product Introduction

- Test battery health status
- Test battery CCA
- Test battery internal resistance
- Test battery voltage and charging status
- Test vehicle cranking system
- Waveform monitoring



Android



iOS



Android System: Search name" K Battery " on Google Play

iOS System : Search name " K Battery " on APP Store

2. Product Parameters

Name: Bluetooth Battery Tester

Model : BK200

Input voltage : DC6V-24V

Working temperature : -40-80 °C (-40-170°F)

Housing: fireproof , IP65


Function: Built-in short circuit and reverse connection protection

3. BK200 advantages

- 1: Support multiple devices online at the same time just click the icon in the upper left corner to select.
- 2: Support the online automatic connection of a single device the device is connected to the battery, and the connection test can be automatically completed by clicking the "test".
- 3: Support sharing battery test result : just click sharing icon to generate report sharing.
- 4: Start-up test: analyze the minimum voltage of the car's starting process, when the minimum voltage is lower than 7.5V, it will affect the car's starting. And it will Analyze whether the highest voltage is higher than 13.5V, if higher than 13.5V that indicates the generator is in normal output situation.
- 5: Charging test: analyze whether the power generation output is normal through voltage and ripple voltage.
- 6: Multi Languages: It is up to 13

4. Installation Instructions

Clamp the clips on the two poles of the battery (Positive pole by red clamp clip and negative pole by black clip)then the LED will light up



5. Application Operation

5.1 Connect Bluetooth

Turn on the bluetooth on phone setting , Enter APP to get automatically match on the device

5.1.2 The blue icon on the top Left corner of the app is on , indicating that the device is connected ; if the grey icon is off , it indicates that it is not connected , please check the hardware device at this time .



Ordinary battery/CCA/900 >



5.2 Create New Battery

Add new battery information to the list in the top right corner of the menu bar .

Step 1.input battery name , select battery type ,select battery standard , enter the rated value .
Step 2.Battery type:Motorcycle battery , ordinary battery, AGM Flat battery, AGM winding battery ,GEL battery.

Step 3.Battery standard: Please check your own battery standard. The battery usually uses one or more standard systems.

Step 4. please enter between 10-2000 value

Step 5. click " test" to get test result according to CCA -Resistance-Voltage -Electricity .

Create new battery

Please enter the battery name

Please select outside the car

Please choose battery Type

Please choose battery stand...


Please enter the rated value

Create

Tips: The battery model ,type, standard and rating are usually marked on the battery label.

5.3. Standard Test

After adding a new battery , return to the homepage to perform standard test and obtain the test result .

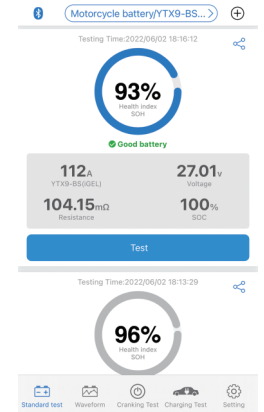

Tips : Before performing standard test, make sure that the engine is turned off .


5.4 Waveform

Waveform monitoring of battery voltage




5.5 cranking test

Click the " Test " button and perform the test according to the on-screen to obtain the test result.

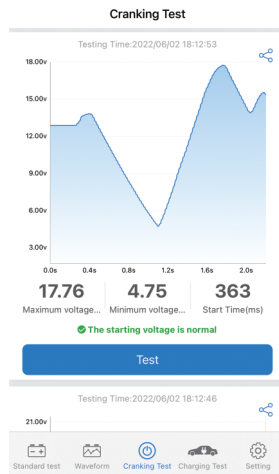

Tips : cranking test the car engine must be started before testing.

5.6. Charging Test

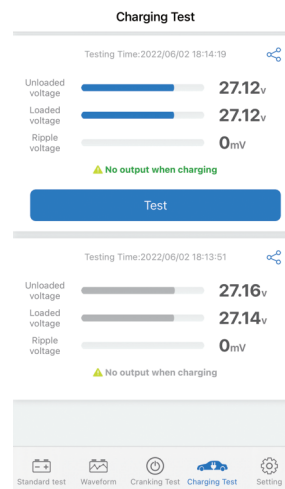

Please do not turn off the engine during the charging test. You must strictly follow the prompts to get accurate test results.

Output state :

6v: unload voltage is higher than 750mv;
12v: unload voltage is higher than 14.5 V;


Tip: Normal status ; The battery is charging normally .

No output state :

6v: 1. unload voltage is higher than 630mv;
2.The unload voltage is higher than the unload voltage

12v: 1.unload voltage is higher than 13.6 V;
2.The unload voltage is higher than the unload voltage

5.7 Share Battery Test Report

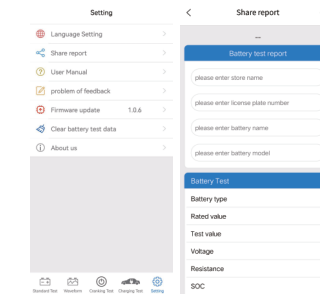

6. Service Procedures

If you have any questions, please contact your local store, distributor or visit our website at www.konnwei.com.If it becomes necessary to return the tool for repair, contact your local distributor for more information.

www.konnwei.com
Shenzhen Jiawei Hengxin Technology Co.,Ltd